






C-Series In-Ground



	In-Ground – 10 W			In-Ground – 20 W		
Finish	CBR			CBR		
Color Temp. (CCT)	3000K	4000K	5000K	3000K	4000K	5000K
Item Number by Beam Spread and Finish + CCT	45° Beam Spread 16227 CBR30	45° Beam Spread 16227 CBR40	45° Beam Spread 16227 CBR50	45° Beam Spread 16230 CBR30	45° Beam Spread 16230 CBR40	45° Beam Spread 16230 CBR50
For Example: 16227+CBR+30=16227CBR30	60° Beam Spread 16228 CBR30	60° Beam Spread 16228 CBR40	60° Beam Spread 16228 CBR50	60° Beam Spread 16258 CBR30	60° Beam Spread 16258 CBR40	60° Beam Spread 16258 CBR50
Housing	Cast Brass			Cast Brass		
Wattage, Delivered Lumens & Efficacy	9.7W 775 lm 80 lm/W			20.3W 1625 lm 80 lm/W		
CRI	80					
Voltage Range	120V-277V, 50-60Hz. Surge protection up to 4kV.					
Light Source	Single, high output, energy efficient COB LED					
Notes	Tested to a Lumen Maintenance L70 of ≥ 55,000 hrs.					
Accessories	 16290SS Stainless Steel Trim Ring					
Dimensions						

Beam Tilt Adjustment

(Set from outside the fixture)

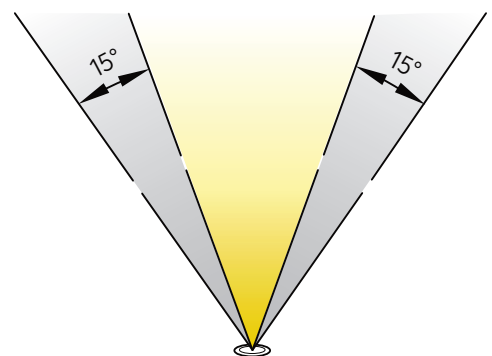

Up to 15° External Beam Tilt Adjustment in Either Direction