

Features:

- Potted and/or coated electronics protect against moisture
- Operating range from 120V to 277V
- Design & listed for wet location & enclosed fixtures
- Can be used in open fixtures or outdoor sockets
- Cast aluminum heat sink, anodized black, for increased thermal management
- Integrated driver and transformer with high output LEDs tightly binned for high CRI, color uniformity and color quality
- 30,000 hour life in an enclosed fixture
- FCC compliance ensures no interference with other electronic devices
- High total lumens and lumens per watt (efficacy)
- Custom optics deliver center-to-edge beam uniformity and glare reduction
- Interior use as well
- 6-year warranty



PAR20
Wet Location



PAR30
Wet Location




PAR30
Longneck
Wet Location



PAR38
Wet Location

Photometrics: 120V-277V LED Lamps

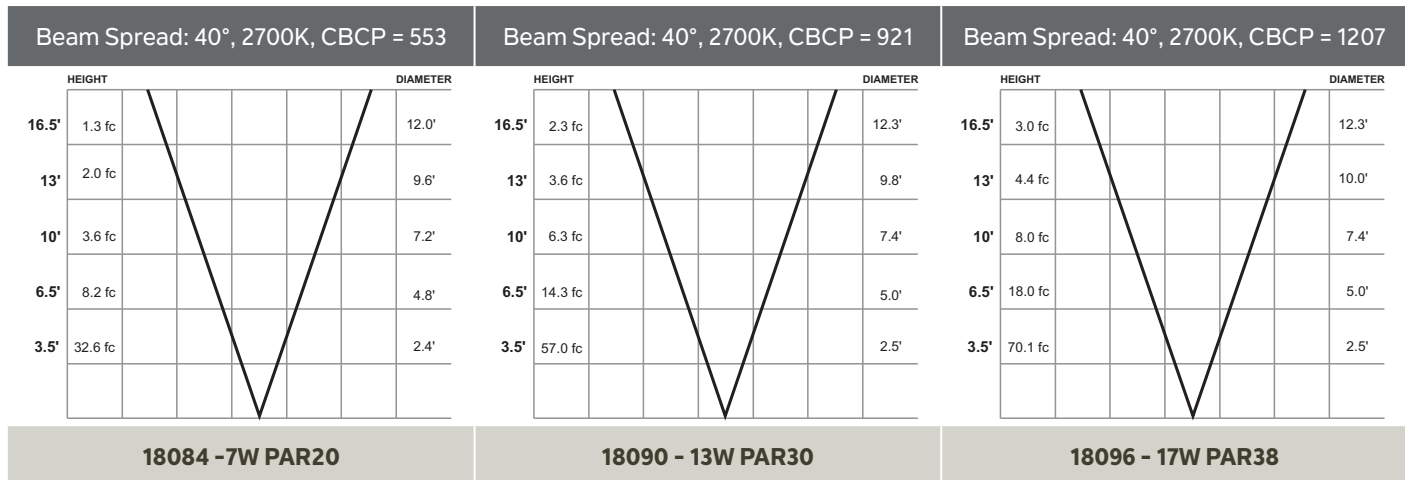

* The curves indicate the illuminated area and the average illumination when the luminaire is at different distances. Stated foot-candles are for bare lamps only. For additional photometrics, visit Kichler.com/Landscape