

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 3/4" (O.D.) Non-Threaded

Downlight Replaceable. Includes (3) E12, 40W B10 Lamps, 4063CLR

Downlight Glass White Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 16.4 lbs.

Body Material Steel

Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 13mm, AC

Amps 0.51 on High

RPM 167 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED FUNCTION

371042 (Shown)
337001
371082

SLOPE ADAPTER




For slope ceiling adapter, see page 316.

DOWNRODS

For Basics 400 Series Non-Threaded Downrods, see page 316.

BLADE SPECS


Blade Finish & Part Number (Side 1) (Reversible) Fan Finish

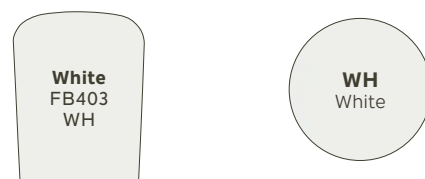

HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 17.75"	B: 10.50"	C: 11.00"	D: 5.25"



FLUSH MOUNT

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.50"	B: 7.00"	C: 11.00"	D: 5.25"

AIR PERFORMANCE

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3893	62	63

AIR PERFORMANCE (FLUSH)

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3169	62	51