

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 3/4" (O.D.) Non-Threaded

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 14 lbs.

Body Material Steel

Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 13mm, AC

Amps 0.49 on High

RPM 186 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED FUNCTION

371042 (Shown)
337001
371082

SLOPE ADAPTER




For slope ceiling adapter, see page 316.

DOWNRODS

For Basics 400 Series Non-Threaded Downrods, see page 316.

BLADE SPECS


Blade Finish & Part Number (Side 1) (Reversible) **Fan Finish**

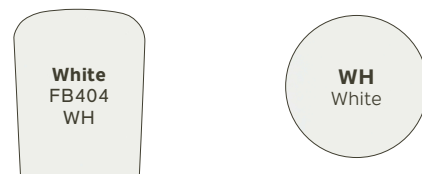

HANGING MEASUREMENTS

WITH 4" DOWNROD

| Fixture Drop (from ceiling) | Blade Drop (from ceiling) | Housing (width) | Ceiling Canopy (width) |
|-----------------------------|---------------------------|-----------------|------------------------|
| A: 12.50" | B: 10.50" | C: 11.00" | D: 5.25" |

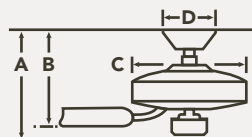

FLUSH MOUNT

| Fixture Drop (from ceiling) | Blade Drop (from ceiling) | Housing (width) | Ceiling Canopy (width) |
|-----------------------------|---------------------------|-----------------|------------------------|
| A: 9.25" | B: 7.25" | C: 11.00" | D: 5.25" |

AIR PERFORMANCE

| AIRFLOW Cubic Ft. Per Minute on High | POWER USAGE Watts on High (Excludes Lights) | AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt |
|---|--|---|
| 3778 | 57 | 66 |

AIR PERFORMANCE (FLUSH)

| AIRFLOW Cubic Ft. Per Minute on High | POWER USAGE Watts on High (Excludes Lights) | AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt |
|---|--|---|
| 3350 | 59 | 57 |