


Path & Spread

12V Integrated LED

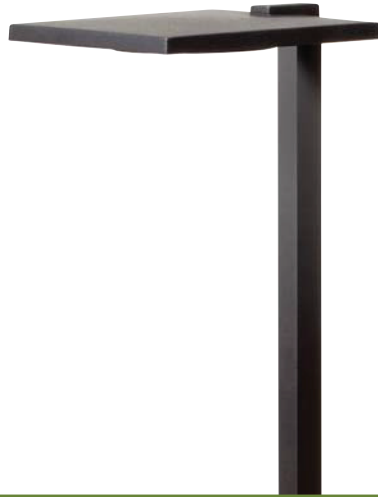

	Shallow Shade Small		Shallow Shade Large						
Finishes	BKT		BKT						
Color Temperature	2700K - Warm White	3000K - Pure White	2700K - Warm White	3000K - Pure White					
Item Number and Finish	15805 BKT27R	15805 BKT30R	15806 BKT27R	15806 BKT30R					
Housing	Cast Aluminum with cast bottom driver compartment		Cast Aluminum with cast bottom driver compartment						
Power Usage at 12V AC Input, VA and Watts	4W, 5.8VA		4W, 5.8VA						
CRI	80+		80+						
Voltage Range	9V-15V AC/DC with no loss in light output		9V-15V AC/DC with no loss in light output						
Light Source	3 integrated high-output LEDs, 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		3 integrated high-output LEDs, 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.						
Delivered Lumens & Efficacy	2700K = 126 lm 2700K = 31 lm/W	3000K = 140 lm 3000K = 35 lm/W	2700K = 126 lm 2700K = 31 lm/W	3000K = 140 lm 3000K = 35 lm/W					
Wiring	30" of usable #18-2, SPT-1W leads. Cable connectors supplied.		30" of usable #18-2, SPT-1W leads. Cable connectors supplied.						
Notes	Includes 8" slotted in-ground stake and has a square stem.		Includes 8" slotted in-ground stake and has a square stem.						
Accessories	15601 Surface Mounting Flange 15607 Surface Mounting Bracket								
Dimensions									
Photometrics									
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'
Foot-candles (FC)	21.2	12.1	5.3	1.56	.55	.33	.11	.06	-
	20.7	11.1	4.8	1.56	.55	.33	.11	.06	-