


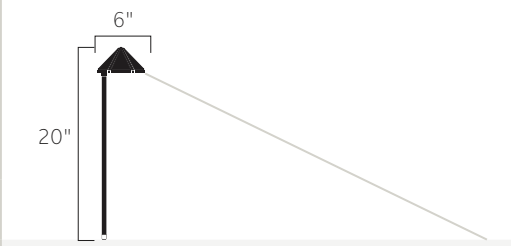






	Broad Roof		Side Mount		
Finishes	AZT		AZT (shown), BKT		Additional Finishes
Color Temperature	2700K - Warm White	3000K - Pure White	2700K - Warm White	3000K - Pure White	 BKT
Item Number and Finish	15833 AZT27R	15833 AZT30R	15815 AZT27R 15815 BKT27R	15815 AZT30R 15815 BKT30R	
Housing	Cast Aluminum with cast bottom driver compartment		Cast Aluminum		
Power Usage at 12V AC Input, VA and Watts	4W, 5.8VA		4.3W, 5.8VA		 LED Deck Light 15765, see page 65
CRI	80+		80+		
Voltage Range	9V-15V AC/DC with no loss in light output		9V-15V AC/DC with no loss in light output		Coordinating Product
Light Source	3 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		8 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		
Delivered Lumens & Efficacy	2700K = 126 lm 2700K = 31 lm/W	3000K = 140 lm 3000K = 35 lm/W	2700K = 294 lm 2700K = 67 lm/W	3000K = 302 lm 3000K = 73 lm/W	
Wiring	30" of usable #18-2, SPT-1W leads. Cable connectors supplied.		52" of usable #18-2, SPT-1W leads. Cable connectors supplied.		
Notes	Includes 8" slotted in-ground stake		Includes 8" slotted in-ground stake		
Accessories	15601 Surface Mounting Flange 15607 Surface Mounting Bracket				
Dimensions	 8.25" (width), 24" (height)		 6" (width), 20" (height)		
Photometrics	 Distance from Light: 0', 1', 2', 3', 4', 5', 6', 7', 8' Foot-candles (FC): 13.5, 3.7, .8, .3, .2, .1, -, -, -		 Distance from Light: 0', 1', 2', 3', 4', 5', 6', 7', 8' Foot-candles (FC): 92, 27, 5.2, 1.2, .3, .16, .08, .05, .04		