

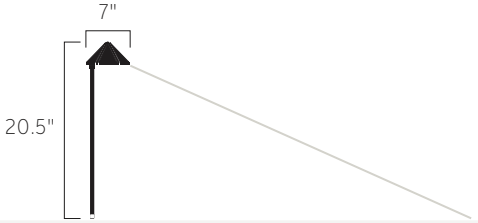
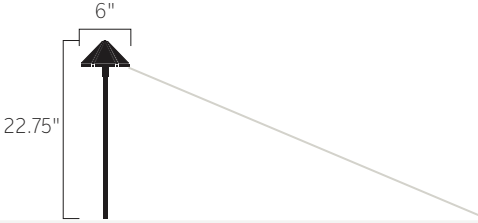


# Path & Spread

12V Integrated LED



	Side Mount Cast Brass		Center Mount																																																														
Finishes	<b>BBR</b>		<b>BKT (shown), AZT</b>		Additional Finishes																																																												
Color Temperature	2700K - Warm White	3000K - Pure White	2700K - Warm White	3000K - Pure White	 AZT																																																												
Item Number and Finish	<b>15827</b> BBR27R	<b>15827</b> BBR30R	<b>15826</b> AZT27R <b>15826</b> BKT27R	<b>15826</b> AZT30R <b>15826</b> BKT30R																																																													
Housing	Cast Brass		Cast Aluminum																																																														
Power Usage at 12V AC Input, VA and Watts	4.3W, 5.8VA		4.3W, 5.8VA																																																														
CRI	80+		80+																																																														
Voltage Range	9V-15V AC/DC with no loss in light output	<b>Coordinating Product</b>	9V-15V AC/DC with no loss in light output	<b>Coordinating Product</b>	 LED Deck Light <b>15765</b> , see page 65																																																												
Light Source	8 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		8 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.																																																														
Delivered Lumens & Efficacy	2700K = 294 lm 2700K = 67 lm/W	3000K = 302 lm 3000K = 73 lm/W	2700K = 294 lm 2700K = 67 lm/W	3000K = 302 lm 3000K = 73 lm/W																																																													
Wiring	53" of usable #18-2, SPT-1W leads. Cable connectors supplied.		50" of usable #18-2, SPT-1W leads. Cable connectors supplied.																																																														
Notes	Includes 8" slotted in-ground stake. Brass will naturally patina over time.		Includes 8" slotted in-ground stake. Included reflector can be removed if necessary. Incandescent version of fixture <b>15326</b> on page 135.																																																														
Accessories	<b>15601</b> Surface Mounting Flange <b>15607</b> Surface Mounting Bracket <b>15677CLR</b> Sprinkler Shield		<b>15601</b> Surface Mounting Flange <b>15607</b> Surface Mounting Bracket <b>FM127265</b> Hexcell Louver <b>FM128296BKT</b> Glare Guard Reflector																																																														
Dimensions																																																																	
Photometrics	<table border="1"> <tr> <td>Distance from Light</td> <td>0'</td><td>1'</td><td>2'</td><td>3'</td><td>4'</td><td>5'</td><td>6'</td><td>7'</td><td>8'</td> </tr> <tr> <td>Foot-candles (FC)</td> <td>92</td><td>27</td><td>5.2</td><td>1.2</td><td>.3</td><td>.16</td><td>.08</td><td>.05</td><td>.04</td> </tr> <tr> <td>FC with Included Reflector*</td> <td>-</td><td>17.5</td><td>5.8</td><td>2.4</td><td>1.2</td><td>.8</td><td>.5</td><td>.3</td><td>.1</td> </tr> </table>		Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Foot-candles (FC)	92	27	5.2	1.2	.3	.16	.08	.05	.04	FC with Included Reflector*	-	17.5	5.8	2.4	1.2	.8	.5	.3	.1	<table border="1"> <tr> <td>Distance from Light</td> <td>0'</td><td>1'</td><td>2'</td><td>3'</td><td>4'</td><td>5'</td><td>6'</td><td>7'</td><td>8'</td> </tr> <tr> <td>Foot-candles (FC)</td> <td>66.5</td><td>30.3</td><td>6.2</td><td>1.4</td><td>.45</td><td>.17</td><td>.10</td><td>.06</td><td>.05</td> </tr> <tr> <td>FC with Included Reflector*</td> <td>-</td><td>17.5</td><td>5.8</td><td>2.4</td><td>1.2</td><td>.8</td><td>.5</td><td>.3</td><td>.1</td> </tr> </table>		Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Foot-candles (FC)	66.5	30.3	6.2	1.4	.45	.17	.10	.06	.05	FC with Included Reflector*	-	17.5	5.8	2.4	1.2	.8	.5	.3	.1	
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'																																																								
Foot-candles (FC)	92	27	5.2	1.2	.3	.16	.08	.05	.04																																																								
FC with Included Reflector*	-	17.5	5.8	2.4	1.2	.8	.5	.3	.1																																																								
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'																																																								
Foot-candles (FC)	66.5	30.3	6.2	1.4	.45	.17	.10	.06	.05																																																								
FC with Included Reflector*	-	17.5	5.8	2.4	1.2	.8	.5	.3	.1																																																								

\*Using optional black glare guard reflector (FM128289BKT) will slightly reduce the above. Reflectors can be flipped or inverted for even more glare control