
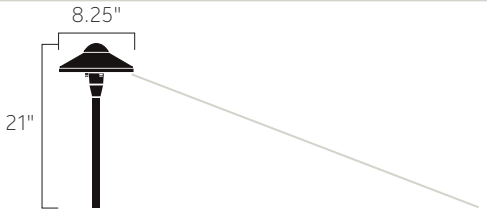



Path & Spread

12V Integrated LED



	8" Dome				8" Dome Short Stem				
Finishes	BKT (shown), AZT, BBR			Additional Finishes	AZT				
Color Temperature	2700K - Warm White		3000K - Pure White	 AZT	2700K - Warm White		3000K - Pure White		
Item Number and Finish	15810 AZT27R 15810 BBR27R 15810 BKT27R		15810 AZT30R 15810 BBR30R 15810 BKT30R		15811 AZT27R		15811 AZT30R		
Housing	Cast Aluminum or Cast Brass (BBR)				 BBR	Cast Aluminum			
Power Usage at 12V AC Input, VA and Watts	4.3W, 5.8VA			4.3W, 5.8VA					
CRI	80+			80+					
Voltage Range	9V-15V AC/DC with no loss in light output			Coordinating Product	9V-15V AC/DC with no loss in light output		Coordinating Product		
Light Source	8 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.			 LED Path Light 15870, see page 51	8 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		 LED Path Light 15870, see page 51		
Delivered Lumens & Efficacy	2700K = 294 lm 2700K = 67 lm/W		3000K = 302 lm 3000K = 73 lm/W		2700K = 294 lm 2700K = 67 lm/W			3000K = 302 lm 3000K = 73 lm/W	
Wiring	30" of usable #18-2, SPT-1W leads. Cable connectors supplied.				36" of usable #18-2, SPT-1W leads. Cable connectors supplied.				
Notes	Includes 8" slotted in-ground stake. Incandescent version of fixture 15310 on page 132. Brass will naturally patina over time. Included reflector can be removed if necessary.			Includes 8" slotted in-ground stake. This is a shorter version of our LED 15810 design. Incandescent version of fixture 15410 on page 132. Included reflector can be removed if necessary.					
Accessories	15601 Surface Mounting Flange 15607 Surface Mounting Bracket			FM127265 Hexcell Louver FM128296BKT Glare Guard Reflector					
Dimensions									
Photometrics									
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'
Foot-candles (FC)	66.5	30.3	6.2	1.4	.45	.17	.10	.06	.05
FC with Included Reflector*	-	17.5	5.8	2.4	1.2	.8	.5	.3	.1

*Using optional black glare guard reflector (FM128296BKT) will slightly reduce the above. Reflectors can be flipped or inverted for even more glare control