





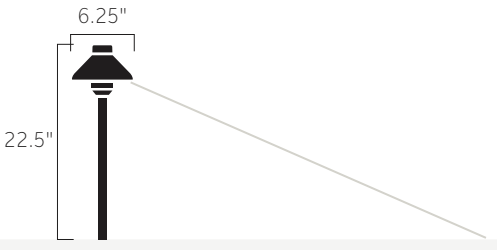





	Llena™			Llenita™																																										
Finishes	CO (shown), AZT, BBR		Additional Finishes	AZT (shown), BBR, CO		Additional Finishes																																								
Color Temperature	2700K - Warm White	3000K - Pure White	 AZT	2700K - Warm White	3000K - Pure White	 BBR																																								
Item Number and Finish	15820 AZT27 15820 BBR27 15820 CO27	15820 AZT 15820 BBR 15820 CO	 BBR	15821 AZT27 15821 BBR27 15821 CO27	15821 AZT 15821 BBR 15821 CO	 CO																																								
Housing	Cast Aluminum, Cast Brass (BBR) or Copper with Natural Brass Accents			Cast Aluminum, Cast Brass (BBR) or Copper with Natural Brass Accents																																										
Power Usage at 12V AC Input, VA and Watts	3.8W, 4.95VA			3.8W, 4.95VA																																										
CRI	80+			80+																																										
Voltage Range	9V-15V AC/DC with no loss in light output		Coordinating Product	9V-15V AC/DC with no loss in light output		Coordinating Product																																								
Light Source	3 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		 LED Path Light 15821, see page 53	3 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		 LED Path Light 15820, see page 53																																								
Delivered Lumens & Efficacy	2700K = 168 lm 2700K = 46 lm/W	3000K = 182 lm 3000K = 49 lm/W		2700K = 168 lm 2700K = 46 lm/W	3000K = 182 lm 3000K = 49 lm/W																																									
Wiring	20" of usable #18-2, SPT-1W leads. Cable connectors supplied.			30" of usable #18-2, SPT-1W leads. Cable connectors supplied.																																										
Notes	Includes 8" slotted in-ground stake. Copper and brass will naturally patina over time.			Includes 8" slotted in-ground stake. Copper and brass will naturally patina over time.																																										
Accessories	15601 Surface Mounting Flange 15607 Surface Mounting Bracket																																													
Dimensions																																														
Photometrics	<table border="1"> <tr> <td>Distance from Light</td> <td>0'</td><td>1'</td><td>2'</td><td>3'</td><td>4'</td><td>5'</td><td>6'</td><td>7'</td><td>8'</td> </tr> <tr> <td>Foot-candles (FC)</td> <td>10.75</td><td>5.6</td><td>2.24</td><td>.66</td><td>.22</td><td>.10</td><td>.07</td><td>.03</td><td>.01</td> </tr> </table>			Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Foot-candles (FC)	10.75	5.6	2.24	.66	.22	.10	.07	.03	.01	<table border="1"> <tr> <td>Distance from Light</td> <td>0'</td><td>1'</td><td>2'</td><td>3'</td><td>4'</td><td>5'</td><td>6'</td><td>7'</td><td>8'</td> </tr> <tr> <td>Foot-candles (FC)</td> <td>20.7</td><td>6.6</td><td>1</td><td>.28</td><td>.10</td><td>.06</td><td>.01</td><td>-</td><td>-</td> </tr> </table>			Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Foot-candles (FC)	20.7	6.6	1	.28	.10	.06	.01	-	-
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'																																					
Foot-candles (FC)	10.75	5.6	2.24	.66	.22	.10	.07	.03	.01																																					
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'																																					
Foot-candles (FC)	20.7	6.6	1	.28	.10	.06	.01	-	-																																					