

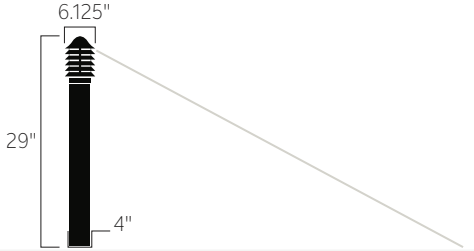
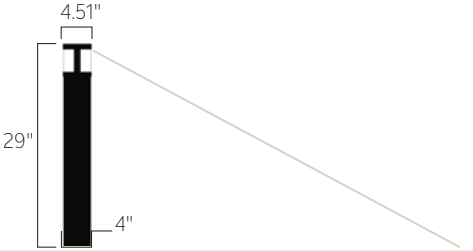






	Louvered Bollard		Tee Bollard						
Finishes	AZT (shown), BKT	Additional Finishes	AZT (shown), BKT	Additional Finishes					
Color Temperature	2800K - Warm White	 BKT	2800K - Warm White	 BKT					
Item Number and Finish	16130 AZT28 16130 BKT28		16131 AZT28 16131 BKT28						
Housing	Cast Aluminum with Weathered White Glass		Cast Aluminum with Weathered White Glass						
Power Usage at 12V AC Input, VA and Watts	3.5W, 5.67VA		3.5W, 5.67VA						
CRI	80+		80+						
Voltage Range	9V-15V AC/DC with no loss in light output		9V-15V AC/DC with no loss in light output						
Light Source	Omni-directional light engine utilizing 3 high output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		Omni-directional light engine utilizing 3 high output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.						
Delivered Lumens & Efficacy	2800K = 224 lm 2800K = 64 lm/W		2800K = 224 lm 2800K = 64 lm/W						
Wiring	20" of usable #18-2, SPT-2W leads. Cable connectors supplied.		20" of usable #18-2, SPT-2W leads. Cable connectors supplied.						
Notes	Customer is required to purchase one of the accessories below for installation		Customer is required to purchase one of the accessories below for installation						
Accessories	Required for installation: 15671ST Bollard Template Kit (concrete or paver applications) 15578BK Bollard Mounting Stake (soil applications)								
Dimensions									
Photometrics									
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'
Foot-candles (FC)	.17	.44	.79	.52	.25	.14	.07	.04	.03
	.08	.85	.82	.51	.35	.22	.14	.1	.07