








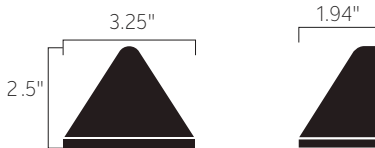
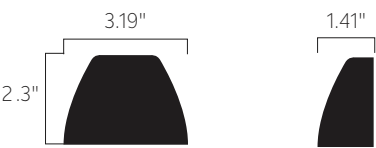


Deck & Patio

12V Integrated LED



	Fundamentals™			Four Corners			
Finishes	GRY (shown), AZT, BBR, BKT, CO, SD		Additional Finishes	AZT (shown), BKT, TZT		Additional Finishes	
Color Temperature	2700K - Warm White	3000K - Pure White	 AZT	2700K - Warm White	3000K - Pure White	 BKT	
Item Number and Finish	16110 AZT27 16110 BBR27 16110 BKT27 16110 CO27 16110 GRY27 16110 SD27	16110 AZT30 16110 BBR30 16110 BKT30 16110 CO30 16110 GRY30 16110 SD30	 BBR	16111 AZT27 16111 BKT27 16111 TZT27	16111 AZT30 16111 BKT30 16111 TZT30		
Housing	Cast Aluminum, Cast Brass (BBR) or Copper (CO)		 BKT	Cast Aluminum		 TZT	
Power Usage at 12V AC Input, VA and Watts	.86W, 1.86VA		 CO	.86W, 1.86VA			
CRI	80+	80+	 SD	80+	80+	Coordinating Product	
Voltage Range	9V-15V AC/DC with no loss in light output			9V-15V AC/DC with no loss in light output			
Light Source	1 integrated high-output LED with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		Coordinating Products	1 integrated high-output LED with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		 LED Path Light 16121 see page 54	
Delivered Lumens & Efficacy	2700K = 41 lm 2700K = 50 lm/W	3000K = 43 lm 3000K = 51 lm/W	 LED Path Light 15839, 16120 see page 45	2700K = 41 lm 2700K = 50 lm/W	3000K = 43 lm 3000K = 51 lm/W		
Wiring	72" of usable #18-2, SPT-1W leads. Cable connectors supplied.			72" of usable #18-2, SPT-1W leads. Cable connectors supplied.			
Notes	Copper and Brass will naturally patina over time						
Dimensions							
Photometrics							
Mounting Height	0'	.5'	1'	2'	3'	4'	5'
6"	76.5	20	3	.2	.06	.05	.03
12"	13	10.63	4.8	1.1	.20	.08	.05
30"	3.2	3.4	2.6	1.2	.52	.24	.12