9 LED Fixture (with Bracket) - 18.9" L

Finishes	**GRY** (shown), AZT, BBR, CO, SD, WHT		**Additional Finishes**
Color Temperature	2700K - Warm White	3000K - Pure White	**AZT** Textured Architectural Bronze
Item Number and Finish	**15756** AZT27 **15756** GRY27 **15756** BBR27 **15756** SD27 **15756** CO27 **15756** WHT27	**15756** AZT30 **15756** GRY30 **15756** BBR30 **15756** SD30 **15756** CO30 **15756** WHT30	
Housing	Cast Aluminum, Cast Brass (BBR) or Copper-Plated Brass (CO)		**BBR** Bronzed Brass
Power Usage at 12V AC Input VA and Watts	2.2W, 3.7VA		
CRI	80+	80+	**CO** Copper
Voltage Range	9V-15V AC/DC with no loss in light output		
Light Source	9 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		**SD** Textured Sand
Delivered Lumens & Efficacy	2700K = 104.2 lm 2700K = 47 lm/W	3000K = 132 lm 3000K = 60 lm/W	
Wiring	70" of usable #18-2, SPT-1W leads. Wire connectors supplied.		**WHT** Textured White
Notes	Copper and brass will naturally patina over time. White finish has coordinating white color leads.		

Accessories	**15719 SS** (Stainless Steel) - 9 LED Flat Mount Bracket Mounting hardware included.

Dimensions

18.9"   .6"

2.9"

55°
Beam Spread
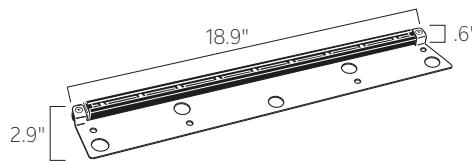
Photometrics*

Mounting Height	0'	1'	2'	3'	4'
12"	80.4	12	1.08	.36	.21
24"	26.81	13.13	3.81	.91	.39
36"	13.51	8.43	4.55	1.78	.62

*Values stated for 3000K. -10% for 2700K.