

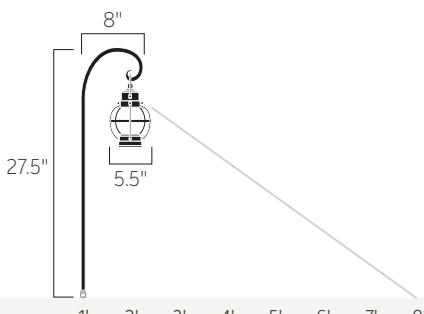


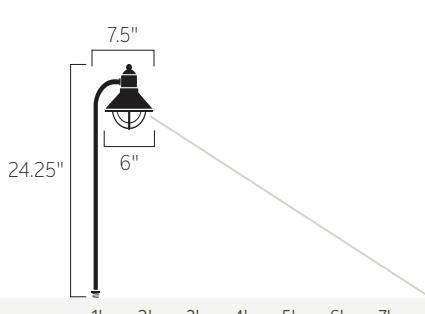

	Concord Lantern		Traditional Marine Lantern		
Finishes	OB		OZ (shown), OB	Additional Finishes	
Item Number and Finish	15334 OB		15438 OB 15438 OZ	 OB	
Housing	Brass with stainless steel rods and seedy glass		Brass with white polycarbonate diffuser		
Lamp Base	12V T5 Wedge base socket		12V S8 Wedge base socket	 OZ	
Lamp Options-Power Usage at 12V AC input	Incandescent: 4W(VA) 901X (17022)	LED: 2W T5 Wedge (18039, 18040) Compares up to 16W Xenon 1.2W T5 Wedge (18198, 18199) Compares up to 10W Halogen 2W T5 Wedge (18204, 18205) Compares up to 20W Halogen	Incandescent: 18.5W(VA) 3155K (15599 CLR)		
Wiring	20" of usable #18-2, SPT-1W leads. Cable connectors supplied.		26" of usable #18-2, SPT-1W leads. Cable connectors supplied.	 OZ	
Notes	Includes 6.5W(VA) 918X (17022) Xenon lamp and 8" in-ground slotted stake.		Includes 18.5W(VA) 3155K (15599 CLR) Krypton lamp and 8" in-ground slotted stake. Brass will naturally patina over time.		
Accessories	15601 Surface Mounting Flange 15607 Surface Mounting Bracket				
Dimensions					
Photometrics*					
Distance from Light	1'	.6	.2	-	
Footcandles	4.7	.6	.2	-	
	5'	-	-	-	
	6'	-	-	-	
	7'	-	-	-	
	8'	-	-	-	
	1'	2.9	1.2	.3	
	2'	-	-	-	
	3'	-	-	-	
	4'	-	-	-	
	5'	-	-	-	
	6'	-	-	-	
	7'	-	-	-	
	8'	-	-	-	

*Values stated for supplied lamp with fixture.