





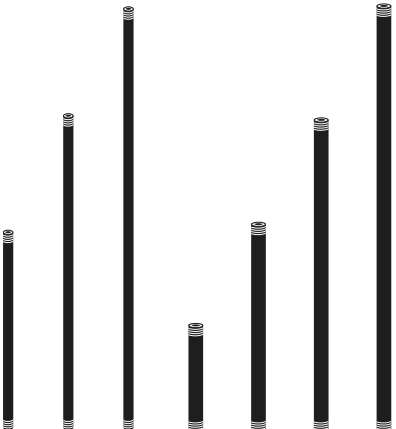


Mounting Accessories	Item Number		Notes
<p>Concrete Installation Kit</p> 	<p>16501 BBRP</p>		<ul style="list-style-type: none"> • Drive-over and walk-over rated to 4,500 lbs. • Throw-away debris lid • Includes two steel support rods <p>For use with fixtures 4W, 6.5W & 14W – 16030, 16031, 16032, 16033, 16034, 16035, 16036, 16037, 16038</p>
<p>Fixture Mounting Stems</p> 	<p>.25-18 NPSM Thd. Stems .5" Dia. Overall</p> <p>12" 15651 AZT, BKT</p> <p>18" 15652 AZT, BKT</p> <p>24" 15653 AZT, BKT</p> <p><i>Reference fixture specifications for proper stem</i></p>	<p>.5-14 NPSM Thd. Stems .75" Dia. Overall</p> <p>6" 15645 AZT, BBR, BKT</p> <p>12" 15656 AZT, BBR, BKT</p> <p>18" 15657 AZT, BBR, BKT</p> <p>24" 15658 AZT, BBR, BKT</p>	<p>All stems made of corrosion-resistant aluminum alloy (except BBR, which is Cast Brass) with baked thermoset powder coating to match fixtures.</p> <p>Used with:</p> <ul style="list-style-type: none"> • In-ground support stakes (low-voltage only) • Surface mounting flange (low or line voltage) <p>.5-14 NPSM stems will require additional Coupler (15649) or Elbow (15647) for accent light use.</p>
<p>Adjustable Height Stems</p>  <p>Extends from 18" to 33"</p>	<p>15570 AZT, BKT</p>		<p>For use with most 12V accent fixtures.</p> <p>Corrosion-resistant aluminum alloy with baked thermoset powder coat finish.</p> <p>Stem allows fixture height to be extended for plant growth. Used with in-ground support stakes (order separately).</p> <p>.5-14 NPSM stems will require additional Coupler (15649) or Elbow (15647) for accent light use.</p>
<p>Bollard Mounting Kit</p>  <p>4.0625" ID 4.25" OD</p>	<p>18" 15665 AZT, BKT</p> <p>24" 15666 AZT, BKT</p> <p>36" 15667 AZT, BKT</p>	<p>For use with fixtures: 15005, 15011, 15205, 15211</p>	<p>Bollard kit is supplied with cast aluminum internal mounting plate including lag bolts for deck or surface mounting. Extruded aluminum bollard finished with baked thermoset powder coat. Order separate bollard template kit for installation into concrete or bollard mounting stake for installation in soil. UL and CSA listed.</p>
<p>Bollard Template Kit</p> 	<p>15671 ST</p> <p>For use with fixtures: 16130, 16131, 16132, 16133</p>		<p>For use with all bollard mounting kits.</p> <p>For permanent installation into concrete. Template kit includes positioning template, anchor bolts and mounting hardware.</p>
<p>Bollard Mounting Stake</p>  <p>23" H</p>	<p>15578 BK</p> <p>For use with fixtures: 16130 AZT, BKT; 16131 AZT, BKT; 16132 AZT, BKT; 16133 AZT, BKT</p>		<p>For use with all bollard mounting kits on 12V and 120V fixtures.* Improved extruded PVC stake is corrosion-resistant and 23" length has increased support and stability. Fitting provided to mount bollard in soil.</p> <p>*As allowed by local electrical codes.</p>
<p>Polymeric Support Stakes</p>  <p>8" H & 14" H</p>	<p>15575 BK – 8" In-ground Stake 15576 BK – 14" In-ground Stake</p>		<p>For use with 12V fixtures.</p> <p>Injection molded stakes are corrosion-resistant and provide maximum support and stability.</p> <p>U.S. Patent No. D415,018</p>