

# 120V-277V LED LAMPS

## Features

- Potted and/or coated electronics protect against moisture
- Operating range from 120V to 277V
- Design & listed for wet location & enclosed fixtures
- Can be used in open fixtures or outdoor sockets
- Cast aluminum heat sink, anodized black, for increased thermal management
- Integrated driver and transformer with high output LEDs tightly binned for high CRI, color uniformity and color quality
- 30,000 hour life in an enclosed fixture
- FCC compliance ensures no interference with other electronic devices
- High total lumens and lumens per watt (efficacy)
- Custom optics deliver center-to-edge beam uniformity and glare reduction
- Interior use as well
- 6-year warranty



**PAR20**  
Wet Location



**PAR30**  
Wet Location




**PAR30**  
Longneck  
Wet Location



**PAR38**  
Wet Location

## Photometrics: 120V-277V LED Lamps

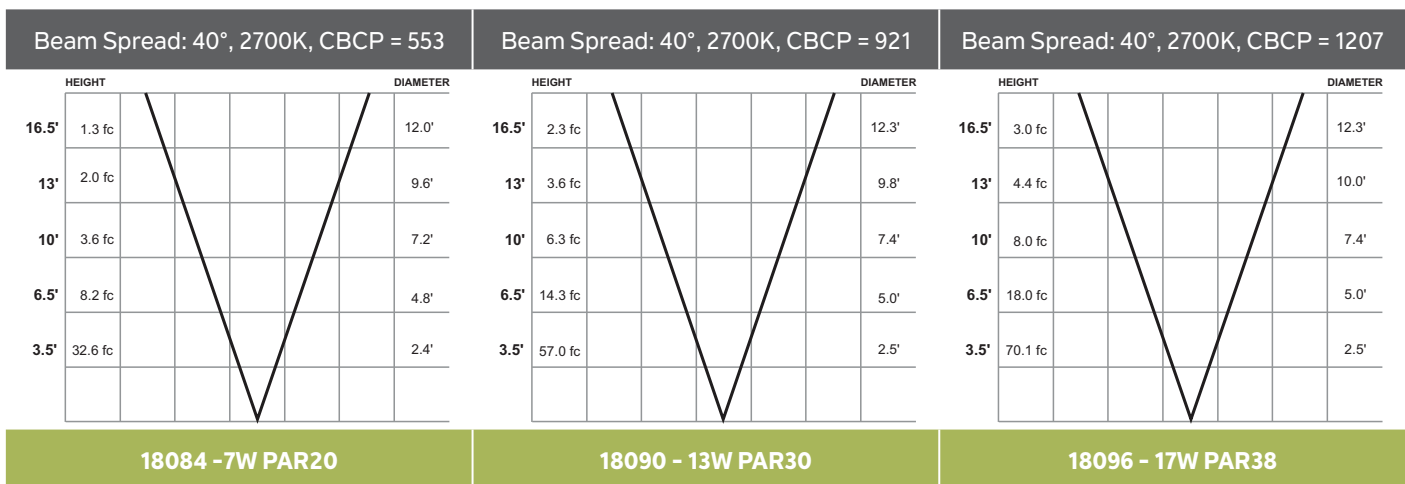

\* The curves indicate the illuminated area and the average illumination when the luminaire is at different distances. Stated footcandles are for bare lamps only. For additional photometrics, visit [Kichler.com/Landscape](http://Kichler.com/Landscape)