
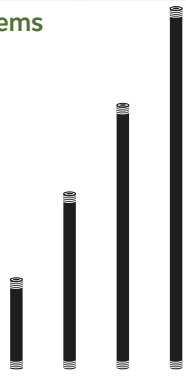









Mounting Accessories	Item Number	Notes
Concrete Installation Kit  7" D 5.19" H	15608 AZ For use with: 15262, 15263, 15266, 15295, 151GT100, 151GT300, 151GT600	Injection molded concrete pour kit.
Fixture Mounting Stems  .5-14 NPSM Thd. stems .75 Dia. overall	6" – 15645 AZT, 15645 BBR, 15645 BKT 12" – 15656 AZT, 15656 BBR, 15656 BKT 18" – 15657 AZT, 15657 BBR, 15657 BKT 24" – 15658 AZT, 15658 BBR, 15658 BKT	All stems made of corrosion resistant aluminum alloy (except BBR, which is Bronzed Brass) with baked thermoset powder coating to match fixtures. Used with: <ul style="list-style-type: none"> • In-ground support stakes (low voltage only) • Surface mounting flange (low or line voltage) .5-14 NPSM stems will require additional Coupler (15649) or Elbow (15647) for accent light use
Power Post®  4.375" 19" 2.25"	15276 BK For use with fixtures: 15205 AZT, 15205 BKT, 15211 AZT, 15211 BKT, 15232 AGZ, 5236 BKT, 15236 TZ, 15239 OB, 15239 OZ and all other .5" NPSM threaded fixtures	Fast, one-step connection. 2.25" inside diameter accepts conduit of different sizes. Made of impact and corrosion resistant PVC, suitable for wet locations. No unsightly junction boxes or time-taking assembly, just a trouble-free installation. Designed for line voltage (120V) landscape lighting. Eliminates need for above or below ground boxes. Built-in stabilizer removes need for concrete. Accepts .5 NPSM thread. UL and cUL listed.
Bollard Mounting Stake  23" H	15578 BK For use with all bollard mounting kits on 12V and 120V fixtures: 15005, 15205, 15211	Improved extruded PVC stake is corrosion resistant and 23" length has increased support and stability. Fitting provided to mount bollard in soil. <i>As allowed by local electrical codes</i>
Bollard Template Kit 	15671 ST For use with all bollard mounting kits on 12V and 120V fixtures: 15005, 15205, 15211	For use with all bollard mounting kits. For permanent installation into concrete. Template kit includes positioning template, anchor bolts, and mounting hardware.
Surface Mounting Flange  4" D 1.5-14 NPSM Thd.	15601 AZT, 15601 BBR, 15601 BKT, 15601 WHT	On 120V installations, Cast Aluminum surface flange must be used with junction box (not included). Neoprene gasket supplied to ensure water tight seal. BBR is Bronzed Cast Brass.
Flange Mounting Nipple  .5-14 NPSM Thd.	15602 AL	Anodized aluminum nipple. Used when attaching fixture directly to 15601 flange and 15607 bracket.
Junction Box Mounting Bracket  2.39" W 5.56" H	15609 AZT, 15609 BKT, 15609 CBR, 15609 WHT	For use with low voltage and line voltage fixtures Corrosion resistant Cast Aluminum alloy with baked thermoset powder coat finish.
Gel Encapsulant 	15616 WH10 10-pack	Re-enterable encapsulant gel for in-ground installations. Two-part field mixable material in one convenient package.