

INCLUDED FEATURES

Blades (3) Included

- 25° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods Flush Mount Only

Downlight Replaceable, Integrated
(1) 23W Dimmable, 2300 Lumens LED Platform, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Low Ceiling Adaptable

Control 65K Wall Control System – Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only

Lead Wire 78"

cUL Listed Wet

Hanging Weight 24.9 lbs.

Body Material ABS

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC

Amps 0.53 on High

RPM 113 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL SYSTEM – FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER – FULL FUNCTION

370006 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.




OPTIONAL HANGER SYSTEM



Downrod Kit
337060 NI, SBK, WH (shown), WH

BLADE SPECS


Blade Finish & Part Number (Side 1) **Fan Finish (Reversible)**

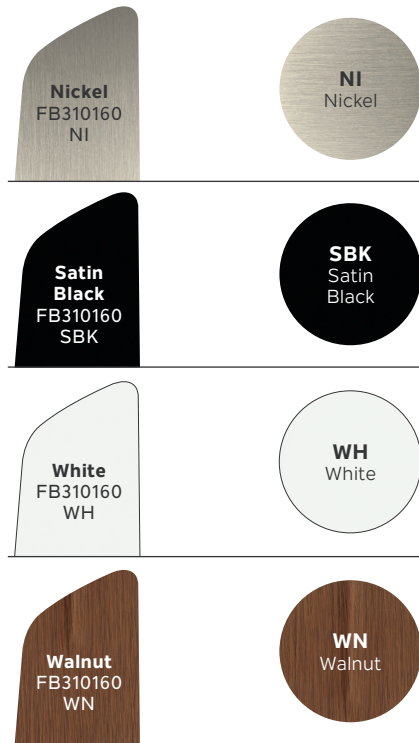

HANGING MEASUREMENTS

FLUSH MOUNT

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 11.50"	B: 9.00"	C: 10.00"	D: 8.00"

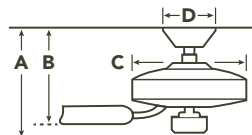

OPTIONAL HANGER SYSTEM

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.50"	B: 11.00"	C: 10.00"	D: 8.00"



AIR PERFORMANCE

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3600	64	56

AIR PERFORMANCE (OPT.)

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
5045	65	78