


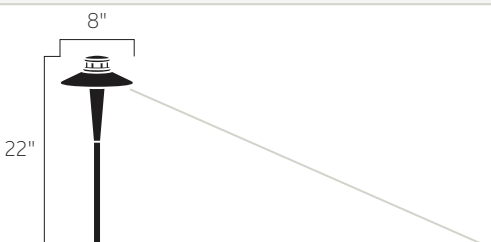
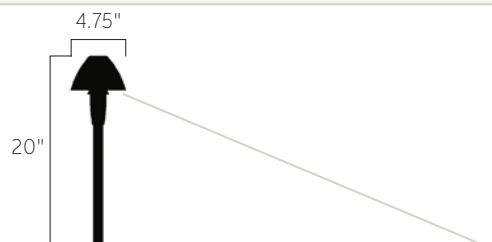




Path & Spread

12V Integrated LED



	Tiki		Four Corners		
Finishes	TZZ		AZT (shown), BKT, TZZ		Additional Finishes
Color Temperature	2700K - Warm White	3000K - Pure White	2700K - Warm White	3000K - Pure White	 BKT  TZZ
Item Number and Finish	15801 TZZ27R	15801 TZZ30R	16121 AZT27 16121 BKT27 16121 TZZ27	16121 AZT30 16121 BKT30 16121 TZZ30	
Housing	Cast Aluminum		Cast Aluminum		 LED Deck Light 16111, see page 66
Power Usage at 12V AC Input, VA and Watts	3.8W, 4.95VA		4.3W, 5.8VA		
CRI	80+		80+		Coordinating Product
Voltage Range	9V-15V AC/DC with no loss in light output		9V-15V AC/DC with no loss in light output		
Light Source	3 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		8 integrated high-output LEDs with 3-step binning for color consistency. Tested to a Lumen Maintenance L70 of 40,000 hrs.		
Delivered Lumens & Efficacy	2700K = 168 lm 2700K = 48 lm/W	3000K = 182 lm 3000K = 49 lm/W	2700K = 294 lm 2700K = 67 lm/W	3000K = 302 lm 3000K = 73 lm/W	
Wiring	24" of usable #18-2, SPT-1W leads. Cable connectors supplied.		30" of usable #18-2, SPT-1W leads. Cable connectors supplied.		
Notes	Includes 8" slotted in-ground stake		Includes 8" slotted in-ground stake. Included reflector can be removed if necessary.		
Accessories	15601 Surface Mounting Flange 15607 Surface Mounting Bracket		15601 Surface Mounting Flange 15607 Surface Mounting Bracket FM127265 Hexcell Louver FM128296BKT Glare Guard Reflector		
Dimensions					
Photometrics					
Distance from Light	0' 1' 2' 3' 4' 5' 6' 7' 8'		0' 1' 2' 3' 4' 5' 6' 7' 8'		
Foot-candles (FC)	5.03 2.8 1 .33 .13 .09 .07 .04 .03		66.5 30.3 6.2 1.4 .45 .17 .10 .06 .05		
FC with Included Reflector*	-		17.5 5.8 2.4 1.2 .8 .5 .3 .1		

*Using optional black glare guard reflector (FM128289BKT) will slightly reduce the above. Reflectors can be flipped or inverted for even more glare control