



KICHLER

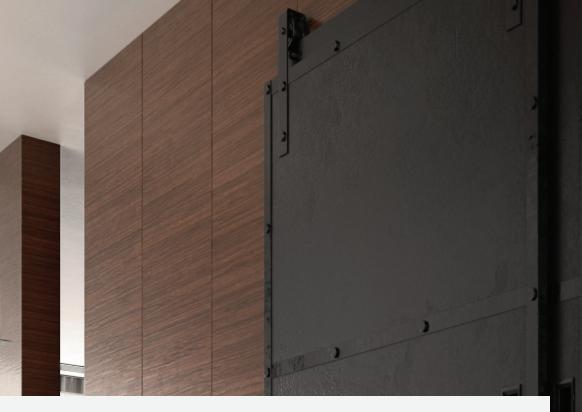

Style in Motion

A light and appliance all in one, Kichler[®] Ceiling Fans, help shed light on what matters most while they bring comfort and style to any room – inside or outside. From open areas to cozy bedrooms, from grand living rooms to outdoor patios, there's a Kichler ceiling fan designed for you.

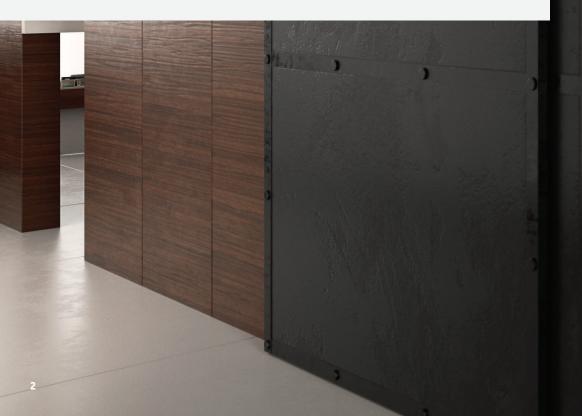







CONNECT WITH US



Facebook.com/Kichler.Lighting Twitter.com/KichlerLight YouTube.com/KichlerLighting Houzz.com/pro/KichlerLighting/Kichler Pinterest.com/KichlerStyle Instagram.com/KichlerLighting

To find an Authorized Dealer, visit Kichler.com.

TABLE OF CONTENTS

BY COLLECTION NAME

CONTENT OVERVIEW

6	DC vs. AC Fans
7	Why Choose LED
8	Rating Guide & Air Circulation

- **10** Advanced Product Support (APS)
- **12** Indoor Living
- 14 Outdoor Living

Visual Index
 Décor Fans
 Kichler[®] Fans

Symbol Guide

- 260 Accessories
- 283 Index

16

COLLECTIONS BY FAMILY NAME

Ahrendale [™]	152
Arkwet [™]	124
Arvada	134
Ashbyrn	142
Basics	246-259
Bisc [™]	94
Bowen	200-205
Cameron	130
Canfield [™]	206-223
Carlson [™]	162
Chiara	138
Colerne [™]	
Eads [™]	154-157
Ellys	132
Eris	62
Ferron [™]	
Flyy [™]	82
Geno [™]	182
Gentry	32-35
Hatteras Bay [™]	184-187
Imari	

Incus	5™110	R
Jace	™	S
Jade		S
Kevla	ar [™] 190-193	S
	erley194	S
	nus 112	S
	м	S
5	y [™] II144	S
	s [™] 160	S
	™ II 126-129	S
	'	Т
	an [™]	Ť
	lon	Ť
-	r158	Ť
	arch [™] 166-175	v
	I [™]	v
	e [™] 66	x
	n	Z
	^M 230-233	Z
	[™]	
Ridle	y [™] II 146	


Ried	42
Seaside [™]	164
Skye [™]	136
Sola	234-239
Spyn	116
Spyra	70
Starkk	240-245
Surrey	
Sutter Place [™]	224
Szeplo [™] II	86-91
Terna [™]	102
Terra	196-199
Todo [™]	228
Trevor [™] II	140
Vassar [™]	178
Volos	114
Xety [™]	74
Zenith [™]	54
Zeus	58

Choosing The Right Size Ceiling Fan For Your Room

STEP ONE

Determine the square footage of your room.

Measure the length and the width of the room and then multiply. For example, 12 feet long x 10 feet wide = 120 square feet.



STEP TWO

Have a tall or cathedral ceiling?

Many Kichler[®] ceiling fans work with 8 or 9 foot ceilings. If your ceiling is higher, you'll need a downrod. The rule of thumb is that fans should have a minimum of 7 feet of clearance between the bottom of the fan blades and the floor in order to circulate the air efficiently.



STEP THREE **Determine the size fan you need:**

	ROOM SIZE	ROOM TYPE	BLADE SWEEP
SQ. FT. OR LESS	90 square feet or less	 Small bedroom or office Galley kitchen Outdoor applications 	15" to 42"
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
<	90 to 100 square feet	 Over a kitchen table Large walk-in closet Laundry room Small screened-in porch Outdoor applications 	44" to 48"
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
<	100 to 150 square feet	 Bedroom Larger kitchen Formal dining room Outdoor applications 	50" to 54"
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
	150 to 300 square feet	 Great room Large outdoor patio Master suite Outdoor applications 	56" to 70" or multiple fans
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
Over 300	Over 300 square feet	• Lobbies • Restaurants • Large open spaces	Over 70" or multiple fans

Five Reasons to Choose a Kichler® DC Motor Fan:

USES UP TO 70% LESS ELECTRICITY than Kichler[®] AC motor fans.

WHISPER QUIET OPERATION virtually eliminates noise.

EASY INSTALLATION thanks to a light-weight motor.

LIFETIME LIMITED WARRANTY on all Kichler[®] fans. Visit **Kichler.com/Warranty** for details.

COOLTOUCH[™] 6-SPEED REMOTE OR WALL CONTROL comes standard with all of our Kichler[®] DC motor fans for full-function operation.



******** and the second straight

Why Choose Kichler[®] LED Ceiling Fans?

REPLACEABLE LIGHT SOURCE

All Kichler[®] LED light sources, whether an integrated module or lamps, are replaceable, which makes them an easy choice for a long-lasting fixture.

ENERGY EFFICIENCY

LED light sources are up to 90% more efficient than fluorescent or incandescent light sources.

TESTED & APPROVED

Kichler[®] integrated LED light sources are tested and approved to meet our rigid engineering standards and quality assurance requirements.

ENHANCED LIGHT QUALITY

Kichler[®] integrated LED light sources produce 1,600+ lumens of light, greater output than two 60W incandescent bulbs or one 100W incandescent bulb. And with a Color Rendering Index (CRI) of 80, Kichler LED light sources help you more accurately see the color and subtleties of the objects being illuminated.

LESS WATTAGE EQUALS LESS WASTE

Most Kichler[®] integrated LED modules use only 17W versus a 100W incandescent bulb, resulting in significant energy savings.





Ceiling Fan Performance Guide

Here's what the numbers mean to you.

Designing ceiling fans that maximize performance for our customers has always been how we do business. We proudly display a rating system for each fan we offer, so you can compare fans with confidence.

Look for this rating guide listed with every Kichler $^\circ$ fan.

Engineered for Optimal

Airflow is measured in Cubic Feet Per Minute (CFM) – a U.S. Government-mandated standard.

• The higher the airflow number, the more air the fan is circulating.

Designed for Minimum

POWER USAGE

Power usage for your fan motor is measured in watts.

- The lower the watts, the less energy the fan consumes.
- DC motor ceiling fans are the most energy-efficient, using the least amount of wattage.

AIR PERFORMANCE

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
6225	73	86


Built for Enhanced

AIRFLOW EFFICIENCY

Airflow efficiency gives you the total picture: dividing the fan's CFMs by the watts of power it consumes.


• The higher the airflow efficiency number, the more air the fan is moving per watt.

Circulate Air With The Seasons



COUNTER-CLOCKWISE

When it's hot outside, set the fan to rotate counter-clockwise. The blades will push air down – creating a breeze or cooling effect on the people in the room.



CLOCKWISE

In the winter, set the fan to rotate clockwise.

The blades will pull the air up and around, moving the warm air that rises to the ceiling back down to the living space.


By changing the fan direction, you can adjust your thermostat up to $+4^{\circ}$ F when it's hot and -2° F when it's cold, which can save on energy costs.

Educational Videos

Need help? Watch our Kichler Fan Fast Facts at Kichler.com/FanFastFacts



Subscribe to our channel: YouTube.com/KichlerLighting




Blade Pitch

What is blade pitch and why is it so important for a ceiling fan? What affects airflow efficiency? Let Kichler Fan Fast Facts help you make the most of your ceiling fan.




Location

What's the best placement of a ceiling fan? Any do's and don'ts for hanging a ceiling fan? Let Kichler Fan Fast Facts help you make the most of your ceiling fan.




Sloped Ceilings

How do you hang a ceiling fan on a sloped ceiling? How steep is too steep? Is an adapter required to hang your fan? Let Kichler Fan Fast Facts help you make the most of your ceiling fan.



Fans with Lights

Kichler[®] ceiling fans with lighting energize and add ambiance to any space, both in terms of style and function. So how do you pick the lighting that's right for a space? Let Kichler Fan Fast Facts help.



Outdoor Fans

Which fan is right for an outdoor space? Damp-rated fans work in high-humidity areas that won't have direct contact to rain or the elements. Wet-rated fans can handle rain and water spray, as well as direct exposure to the sun. CLIMATES[™] fans can withstand the harshest outdoor elements.



Bluetooth[®] Technology

Did you know that with a Kichler Bluetooth[®] speaker light kit you can turn your ceiling fan into a sound system? Get the details and see the technology in action with Kichler Fan Fast Facts.



Advanced Product Solutions & Layout (APS)

Helping You Get The Job Done.

Our Advanced Product Solutions & Layout (APS) Team is a free service provided to our partners to help with design, layout, and technical challenges.

Need to know which cabinet lights to use in a kitchen? Or how to achieve the best lighting effects for your landscape project? Send our layout team your plan. Want to understand how one of our products will operate in a unique location? Give our Technical Support Team a call.

CERTIFIED EXPERTS

With years of combined technical and design training, our APS team is ready to support your layout design service needs for the interior, exterior, commercial, or residential spaces, as well as technical guidance on our entire product line.



A FREE service, only for Kichler partners.



APS LAYOUT SERVICES

This layout design service is available to all Kichler Lighting partners.

- Email us at layouts@kichler.com with a completed design request form (available at Kichler.com/APS) along with any drawings or pictures related to the job.
- Our team will create a bill of materials (BOM) and email it back to you.
- 3 Once you confirm the BOM and pricing, we'll return a completed layout design.

APS TECHNICAL SUPPORT

No question is too complex. We're available 8:00 AM to 6:30 PM EST, Monday-Friday.

Call us at 844-KICHLER (844-542-4537) or email us at techsupport@kichler.com.



Visit Kichler.com/APS to get started






Indoor Living

Add a breath of fresh air to any room.

Any size, any finish, any style... Kichler[®]'s comprehensive offering turns ceiling fans into focal points you'll love looking at in any room – even laundry rooms and master closets. We offer one of the largest collections of modern styles available, and feature some of the most unique textures you'll find including Anvil Iron, Satin Black, Weathered White Walnut, Bamboo, Brushed Nickel, Weathered Zinc, Walnut and many more.

Bring it all together.

Carry the look and the light throughout a room to create an effect you'll love for years.

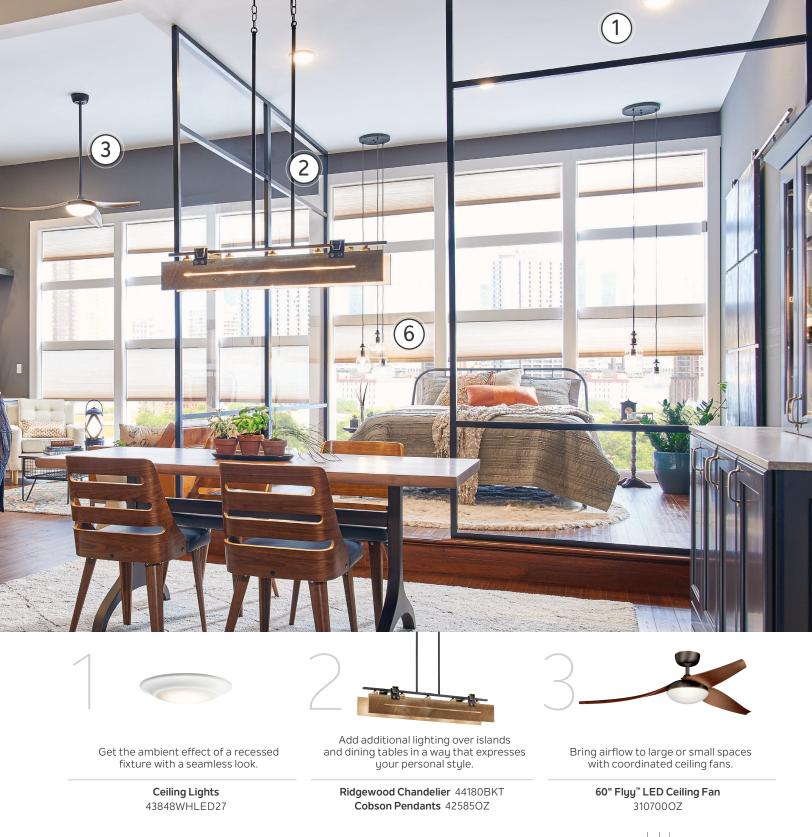



Don't overlook countertop workspaces – under cabinet options add light without a harsh glare.

> Under Cabinet Lights 6UCSK08WHT



Add small disc lights to create visual interest and highlight shelving.

Accent Discs 4D12V27BZT



Use decorative lighting in unexpected ways to add your own unique look.

Riviera 3 Light Pendants 43952OZ







Outdoor Living

Keep your cool outside.

Kichler[®] outdoor ceiling fans bring style and airflow to your favorite al fresco entertaining spaces. Each offers premium finishes and hardware designed to withstand the elements for years of worry-free performance. Best of all: these fans can also be used indoors - so you can carry the look inside. Be sure to choose a fan rated for your particular space. Kichler offers a range of Wet, Damp and CLIMATES[™] selections to pick from.

Bring it all together.

Bring life to your outdoor spaces after dark with the right lighting pieces.





Arrange pendant fixtures in clusters – for a stylish statement and ambient light.

Argyle Outdoor Pendants 49747WZC



...or large fixtures to match your space.

LED Hardscape Lighting 6 LED 15746AZT27



Outdoor ceiling fans bring light, as well as added temperature control, to sitting areas.

Rana[™] LED Fan 60" 310155NI



A built-in Bluetooth® speaker allows you to wirelessly add music to your gatherings.

Lyndon[™] LED Portable Lantern 49500BKTLED



The right hardscape lighting helps guide your guests at night. Choose small...

LED Hardscape Lighting 1 LED 15744AZT27

Symbol Guide



DC MOTOR CEILING FANS

The ultimate in energy-efficient operation

- Use up to 70% less electricity than AC motor fans
- Have whisper-quiet operation
- · Cool and efficient operation extends motor life

ENERGY STAR® CEILING FANS

The trusted, government-backed symbol for energy-efficient products

- Meet strict guidelines set by the U.S. Environmental Protection Agency (EPA)
- Are 40% more efficient than conventional fan/light units
- Come with highly efficient light source options



LED LIGHT KIT CEILING FANS

Feature a long life, light source that is extremely energy efficient

- All Kichler $^{\circ}\,\text{LED}$ light sources are replaceable, whether an integrated LED module or lamps
- Use up to 90% less energy than incandescent light sources and are a low-maintenance alternative
- Last up to 20 times longer than incandescent light sources
- Generate less heat than incandescent light sources

DAMP-RATED CEILING FANS

Engineered for high-humidity areas

- For enclosed porches, sunrooms, bathrooms and more
- · Have water-resistant, durable finishes
- · Incorporate galvanized undercoating on all metal surfaces
- Include stainless-steel mounting hardware
- Feature all-weather ABS plastic or sealed wood blades

WET-RATED CEILING FANS

For open or direct exposure to sun, rain or water spray

- · Are ideal for pergolas, lanais, open porches and more
- Have highly durable finishes against rain and snow
- Feature stainless-steel mounting hardware
- Include all-weather ABS plastic blades


DRY-RATED CEILING FANS

• Rated for indoor use only and are <u>NOT</u> intended for damp or wet locations






Décor Fans

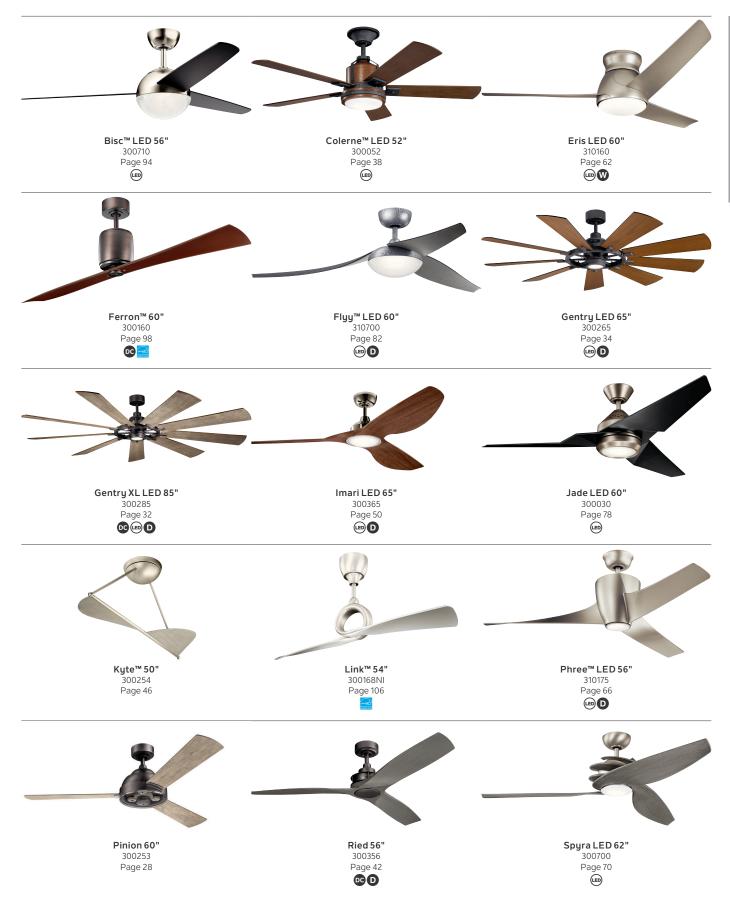



Décor Fans



300060 Page 58

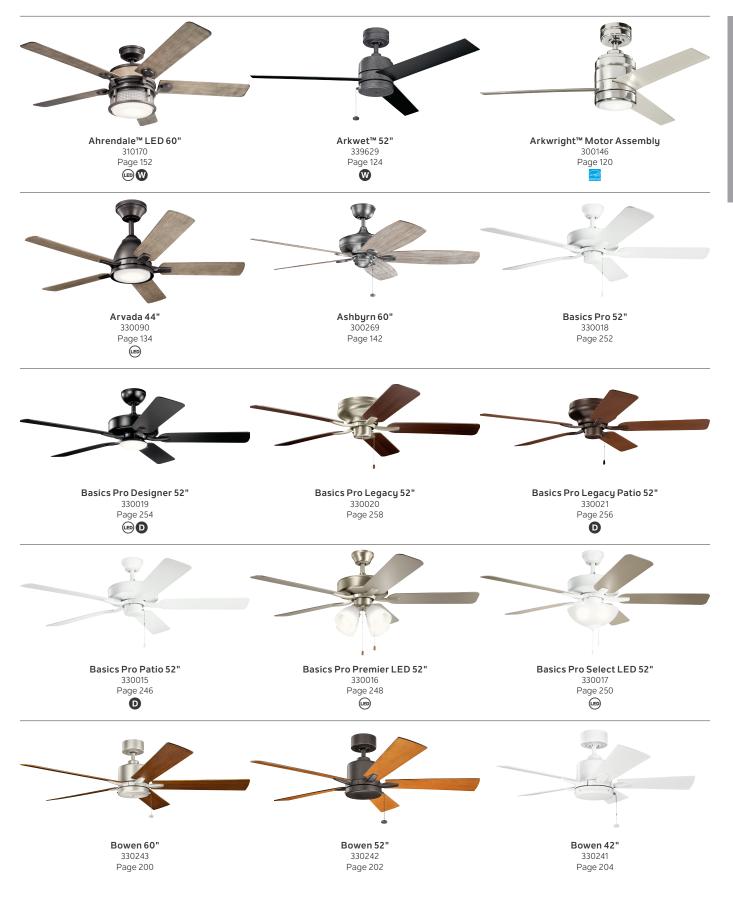

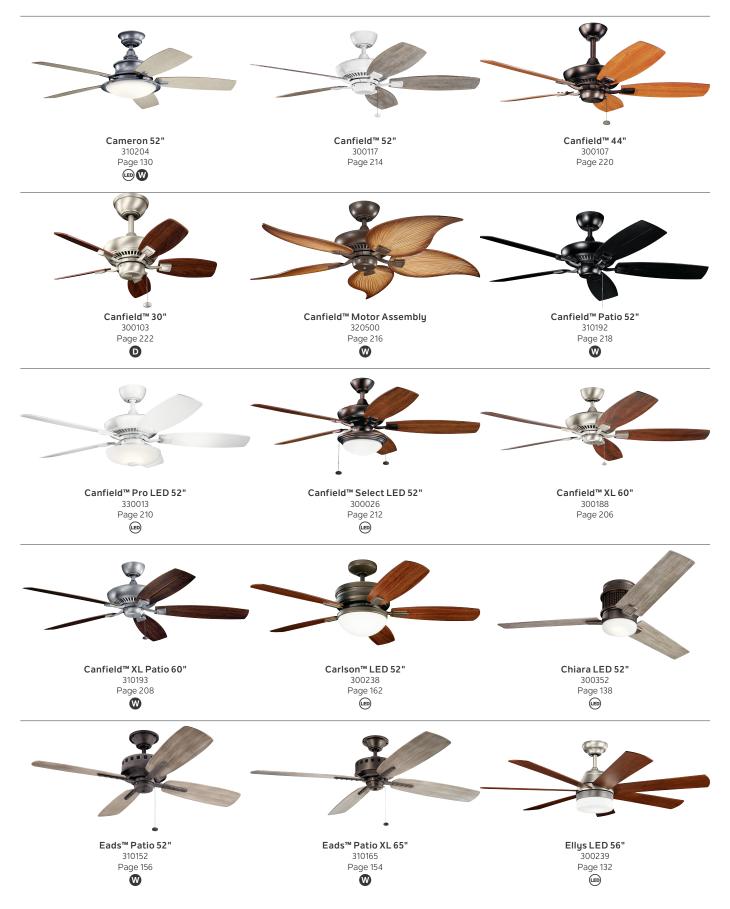

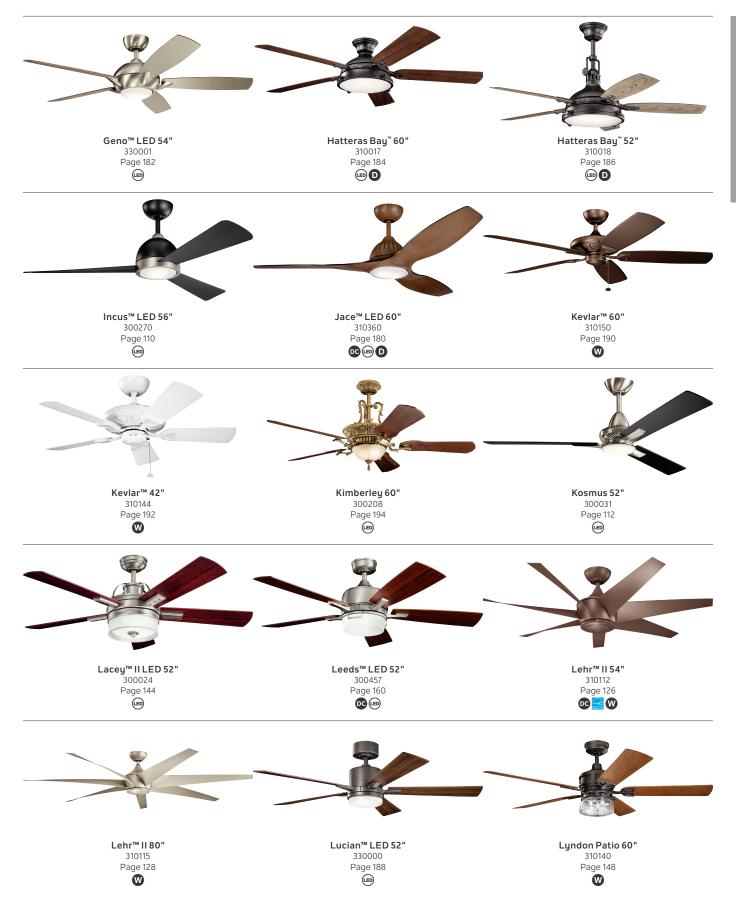



Kichler[®] Fans







Décor[™]Fans

Styles That Inspire.

Our décor ceiling fan collection blends our most advanced engineering with a trend-forward approach to design. Delivering emerging ceiling fan styles, new-to-market finishes, and integrated LED lighting that enhances the atmosphere of any space.







Pinion

Inspired by the beauty and elegance of clock gears, the Pinion collection brings a unique focal point to any room. Its combination of charm and classic look combined with industrial touches will have guests talking as they watch the gears gracefully turn. The Pinion is perfect for medium to large indoor spaces.



Shown: 300253AVI Anvil Iron Finish, Clear Polycarbonate, with Distressed Antique Gray Blades

60" Pinion



INCLUDED FEATURES

Blades (3) Included

- 16° Pitch
- 60" Sweep
- Non-reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass Clear Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 3-Speed Wall Control -Full Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 24 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.61 on High RPM 153 on High Energy Star® No

	65K W
	FULL
	- 3 Fo
*	Reve

ALL CONTROL -FUNCTION rward Speeds,

INCLUDED CONTROLS

- Reverse & Motor Off - Lights On/Off with
 - Full-Range Dimming

OPTIONAL CONTROLS




TRANSMITTER -FULL FUNCTION 337009 (Shown)



HANGING MEASUREMENTS

WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 15.60"	B: 12.30"	C: 11.80"	D: 5.87"	



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6203	73	85	



Gentry LED


Massive in scale and size, Gentry knows how to make an impact – both visually and with impressive airflow. The nine-blade design creates a stunning visual effect on or off. Your choice of industrial era-inspired finish combinations provide styles that fit with modern, classic or rustic settings. The LED light source provides 1,600 lumens of output – about the equivalent of a 150-watt incandescent light bulb – for terrific ambient light.





300285AVI Anvil Iron Finish, Etched Cased Opal Glass, with Distressed Antique Gray Blades



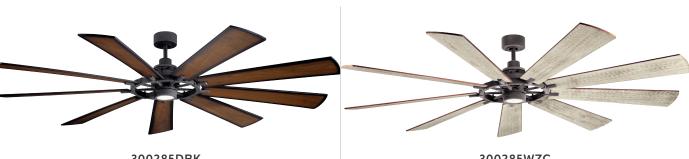

300285DBK Distressed Black Finish Walnut Shadowed Blades Etched Cased Opal Glass 300285WZC Weathered Zinc Finish Weathered White Walnut Blades Etched Cased Opal Glass



300285AVI7 Anvil Iron Finish Distressed Antique Gray Blades Etched Cased Opal Glass

INCLUDED FEATURES

Blades (9) Included

- 14° Pitch
- 85" Sweep
- Reversible
- Wood Veneer

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A


Low Ceiling Adaptable No Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Damp Hanging Weight 37.4 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165NL Amps 0.47 on High RPM 76 on High Energy Star[®] No



6-SPEED DC WALL CONTROL SYSTEM



- 6 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full-Range Dimming

- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Chalkboard Sconce 44015WZC



• Cahoon™ Sconce 43777AVI

Blade Finish & Part Number Fan Finish (Reversible) (Side 1) Distressed Antique Gray FB300285 Walnut AVI FB300285 Anvil AVI AVI Distressed Antique AVI7 Walnut **Gray** FB300285 AVI7 FB300285 Anvil AVI7 Walnut Shadowed DBK Walnut Distressed FB300285 FB300285 DBK Black DBK Veathered Dark White Walnut B300285 WZC WZC Walnut Weathered FB300285 Zinc WZC

BLADE SPECS

HANGING MEASUREMENTS

	WITH 6" D	OWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.50"	B: 14.00"	C: 7.00"	D: 6.00"	Į

	←D→
↑ B	C ⊨ ⊟ →


AIR	PERFORM	ANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
9294	31	300





300265DBK Distressed Black Finish, Etched Cased Opal Glass, with Walnut Blades





300265AVI Anvil Iron Finish Distressed Antique Gray Blades Etched Cased Opal Glass



300265WZC Weathered Zinc Finish Dark Walnut Blades Etched Cased Opal Glass



300265AVI7 Anvil Iron Finish Distressed Antique Gray Blades Etched Cased Opal Glass

65" Gentry LED



Blades (9) Included

- 14° Pitch
- 65" Sweep
- Reversible
- Wood Veneer

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Damp Hanging Weight 33 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165NL Amps 0.45 on High RPM 122 on High Energy Star® No

INCLUDED CONTROLS

6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds. Reverse & Motor Off
- Lights On/Off with
 - Full-Range Dimming - No More Than Two Fans
 - on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see the complete Fulton Cross[™] Collection visit Kichler.com.




Blade Finish & Part Number Fan Finish (Reversible) (Side 1) Distressed Antique Gray FB300265 AVI Walnut AVI FB300265 Anvil AVI Distressed Antique AVI7 Walnut **Gray** FB300265 AV17 FB300265 Anvil AVI7 Walnut DBK Walnut Shadowed FB300265 Distressed Black FB300265 DBK DBK Weathered Dark WZC White Walnut FB300265 WZC Walnut FB300265 Weathered Zinc WZC

BLADE SPECS

HANGING MEASUREMENTS

WITH 6" DOWNROD						
	Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
	A: 16.50"	B: 14.00"	C: 7.00"	D: 6.00"		

237



AIR PERFORMANCE						
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt				
	J .					

34

8061





Colerne[™] LED

You'll love the vintage industrial feel that Colerne brings to a space. Wood-tone blades create the look of rustic wood, while metal accents deliver a style that's at home in farmhouse or modern settings. Integrated LED downlighting allows you to fill a space with just the right amount of light.



Store:

300052DBK Distressed Black Finish, Etched Cased Opal Glass, with Auburn Stained Blades

52" Colerne LED



INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control – Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 24.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 15mm, AC Amps 0.59 on High RPM 183 on High Energy Star® No

INCLUDED CONTROLS



- 3 Forward Speeds, Reverse & Motor Off - Lights On/Off with
 - Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 370006 (Shown)

COORDINATING LIGHTING


To see the complete Colerne[™] Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Ceiling Canopy (width)			
A: 17.00"	B: 12.50"	C: 9.50"	D: 7.25"	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High (Excludes Lights) AIRFLOW EFFICIENCY Cubic Ft. Per Minute Lights) Per Watt				
5205 70 75				



BLADE SPECS



Ried

Get a wood-blade look in a style that works in damp spaces, like an enclosed patio or sunroom. Ried combines unique wood tones with rustic-inspired finishes for a fan that delivers on the emerging modern industrial trend.



Shown: 300356NI Brushed Nickel Finish with Medium Walnut Blades

56" Ried

300356AVI Anvil Iron Finish Driftwood Blades 3003560Z Olde Bronze[®] Finish Cherry Blades (Shown with 3803560Z LED Light Kit)

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 56" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System – Limited Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cETL Listed Damp Hanging Weight 17.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 12mm, AC Amps 0.51 on High RPM 156 on High Energy Star® No





Ried LED Light Kit 380356 AVI, NI (shown), OZ Etched Cased Opal Glass, 17W Integrated LED Platform, 1,600 lm, 80 CRI, 3,000K 6.50" Dia. x 2.75" H

COORDINATED LIGHTING




HANGING MEASUREMENTS

WITH 6" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 14.25"	B: 13.50"	C: 8.00"	D: 6.00"

AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	c Ft. USAGE EFFICIENCY linute Watts on High Cubic Ft.				
5260	J				



BLADE SPECS Blade Finish & Part Number (Side 1) (Perereikle) Fan Finish



Kyte™

Highly decorative, Kyte brings a whisper-quiet movement of air to rooms in a big way. The ceiling-mounted motor design allows the sleek blades to stand apart, simulating the look of wind turbines for a clean and natural aesthetic.





300254SNB Satin Natural Bronze Finish Walnut Blades 300254NI7 Brushed Nickel Finish Black Blades

Rods included to achieve both 24" and 36" fixture drop

INCLUDED FEATURES

Blades (2) Included - 16° Pitch - 50" Sweep - Non-reversible - ABS Downrods N/A Downlight N/A Downlight Glass N/A **Optional Downlight N/A** Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Fan Slide Control

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only Lead Wire 8" cETL Listed Indoor Hanging Weight 28 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 20mm, AC Amps 0.23 on High RPM 84 on High Energy Star® No



FAN SLIDE CONTROL

- 4-Speed Fan Control
- Faceplate Included
- Controls One Fan
 - For Use with Most
 - **Ceiling Fans**

OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 371082



HANGING MEASUREMENTS


WITH 24" FIXTURE DROP

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 24.00"	B: 20.50"	C: 12.25"	D: 12.20"

WITH 36" FIXTURE DROP

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 36.00"	B: 32.50"	C: 12.25"	D: 12.20"

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
974				



EXCELLENT QUALITY, SLEEK AND BEAUTIFUL!



G This has to be one of the most beautiful fans I have ever seen! Installation was simple, once we figured out how to get to our 18 ft ceiling. Instructions are very detailed, which I appreciate. Controls are fairly simple once you read through the booklet. Great power and creates a good breeze to cool our home. Over all wonderful quality, and just stunning!

- Ar38special | West Virginia



Imari LED

With a 65-inch blade span, Imari offers airflow to fit the occasion. The propellerinspired single-mold three-blade design creates a clean, sophisticated look. The LED light source provides 2,300 lumens of output – about the equivalent of two 150-watt incandescent light bulbs – for a substantial amount of room-filling ambient light.



Imari LED 300365SBK Satin Black Finish with Weathered White Walnut Blades and White Polycarbonate Lens (Shown with 360001SBK 18" Downrod) | Page 50

Shown: 300365PN Polished Nickel Finish, White Polycarbonate, with Walnut Blades

65" Imari LED



Matte White Finish Light Oak Blades White Polycarbonate Lens



Satin Black Finish Weathered White Walnut Blades White Polycarbonate Lens

65" Imari LED

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 65" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 23W Dimmable Lamp

Downlight Glass White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Damp Hanging Weight 26.4 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-188 Amps 0.44 on High RPM 126 on High Energy Star® No



BLADE SPECS






HANGING MEASUREMENTS

	WITH 6" D	OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	↑ ↑ A B
A: 14.50"	B: 11.75"	C: 10.00"	D: 6.25"	JJ.

AIR	PERFORM	ANCE
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW

Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
9548	34	282







Zenith[™] LED

A sweeping look that flows from one blade to another, Zenith brings a Zen-like feel to large living areas. The unique blade design appears to wrap around the fan body, blending the arms and blades into one cohesive piece of functioning art.



Shown: 300200SBK Satin Black Finish, Etched Cased Opal Glass, with Silver Blades

60" Zenith[™] LED



INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter – Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 33 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.61 on High RPM 134 on High Energy Star[®] No

- 3 Forward Speeds & Motor Off - Manual Reverse - Lights On/Off with Full-Range Dimming	
OPTIONAL CONTROLS	
COOLTOUCH [™] TRANSMITTER – LIMITED FUNCTION 337214TR (Shown)	
COORDINATING LIGHTING	
To see more from these collections visit Kichler.com.	
Arcola [™] Sconce 10630PNLED Stelata [™] Sconce 45627PN	
Branches Sconce 44091BK	

INCLUDED CONTROLS

LIMITED FUNCTION

WALL TRANSMITTER -

HANGING MEASUREMENTS

WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Ceiling Canopy (width)			
A: 14.00"	B: 10.25"	C: 11.60"	D: 6.40"	

AIR	PERFORM	ANCE
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
6225	73	86



A B

BLADE SPECS



DRY LOCATIOINS

Kichler.com 55


Zeus LED

Contrasting polished and matte finishes combine for a powerful visual effect that adds a wow-factor to any large space. The sleek look features blades that are held in place in tandem. Known as "blade irons," this functional – yet unique – metal construction gives the fan a style that works beautifully in contemporary spaces.



Shown: 300060PN Polished Nickel Finish, White Polycarbonate Lens, with Black Blades

60" Zeus LED

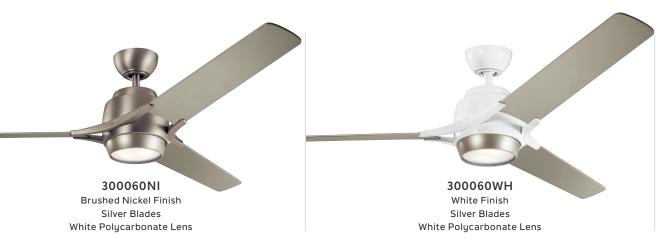

60" Zeus LED

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass White Polycarbonate Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System -**Full Function**

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 22.1 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.66 on High RPM 170 on High Energy Star® No

•]	
-	•
	0
KKHLER*	
-0-	-

INCLUDED CONTROLS

65K WALL CONTROL SYSTEM – FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off Lights On/Off with
- Full-Range Dimming

OPTIONAL CONTROLS




TRANSMITTER -FULL FUNCTION 370006 (Shown)



HANGING MEASUREMENTS

	WITH 4.50"	DOWNROD	
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 11.25"	C: 8.75"	D: 6.00"



AIR	PERFORM	ANCE
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
6200	77	80



Eris LED

Designed to nestle cleanly against the ceiling while still delivering a generous amount of airflow, Eris marries performance with style. Use inside or out – the sleek design, wet rating and 2,300-lumen light output bring room-filling light to a variety of gathering spaces, including open-air patios or decks.



Shown: 310160NI Brushed Nickel Finish, Etched Cased Opal Glass, with Nickel Blades

60" Eris LED



60" Eris LED





Blades (3) Included

- 25° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods Flush Mount Only

Downlight Replaceable, Integrated (1) 23W Dimmable, 2300 Lumens LED Platform, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Low Ceiling Adaptable

Control 65K Wall Control System -Full Function

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only Lead Wire 78" cUL Listed Wet Hanging Weight 24.9 lbs. **Body Material ABS** Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.53 on High RPM 113 on High Energy Star® No

Watts on High

(Excludes

Lights)

64

Per Minute

on High

3600

INCLUDED CONTROLS



SYSTEM - FULL FUNCTION - 3 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 370006 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



OPTIONAL HANGER SYSTEM



Downrod Kit 337060 NI, SBK, WH (shown), WH

C

D

HANGING MEASUREMENTS


	SOREMEN		1173	
		MOUNT	FLUSH	
↑ ↑ A B 	Ceiling Canopy (width)	Housing (width)	Blade Drop (from ceiling)	Fixture Drop (from ceiling)
<u>↓</u> ↓.	D: 8.00"	C: 10.00"	B: 9.00"	A: 11.50"
		NGER SYSTEM	OPTIONAL HA	
(Ceiling Canopy (width)	Housing (width)	Blade Drop (from ceiling)	Fixture Drop (from ceiling)
	D: 8.00"	C: 10.00"	B: 11.00"	A: 14.50"
FORM	AIR PEF	NCE	ERFORMA	AIR P
POWE USAG	AIRFLOW Cubic Ft.	AIRFLOW		AIRFLOW Cubic Ft.


Cubic Ft.

Per Minute

Per Watt

56



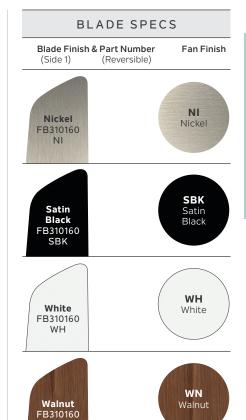

WN



Phree™ LED

Sleek, stylish and solid with a triangular body and precision blades molded into one piece, creating a seamless contemporary design. The center light provides a focal point versus adding whole-room ambient light.



Shown: 310175NI Brushed Nickel Finish, Etched Cased Opal Glass, with Nickel Blades

56" Phree™ LED

310175WH White Finish White Blades Etched Cased Opal Glass **310175WN** Walnut Finish Walnut Blades Etched Cased Opal Glass

56" Phree[™] LED



Blades (3) Included

- 22° Pitch
- 56" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System – Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Damp Hanging Weight 28.5 lbs. Body Material ABS Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.73 on High RPM 142 on High Energy Star[®] No

- 3 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full-Range Dimming OPTIONAL CONTROLS 65K COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 370006 (Shown) COORDINATING LIGHTING

INCLUDED CONTROLS

65K WALL CONTROL

SYSTEM - FULL FUNCTION

To see the complete Moderne Collection visit Kichler.com.




Oval Chandelier/Pendant 42993SNLED

HANGING MEASUREMENTS

	WITH 4.50"	DOWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 16.00"	B: 15.50"	C: 9.50"	D: 6.75"	ļ

AIR	PERFORM	ANCE
AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
6467	87	75









Kichler.com 67

Spyra LED

Inspired by a stirring whirlwind, Spyra's contoured edges on blades and body reflect the light beautifully. Once in motion, the fan generates a powerful breeze, appearing to gather speed from top to bottom.



Shown: 300700MWH Matte White Finish, Etched Cased Opal Glass, with Weathered White Walnut Blades

62" Spyra LED

300700AP Antique Pewter Finish Walnut Blades Etched Cased Opal Glass 300700NI Brushed Nickel Finish Silver Blades

Etched Cased Opal Glass

300700NI7 Brushed Nickel Finish Driftwood Blades Etched Cased Opal Glass

62" Spyra LED



INCLUDED FEATURES

Blades (3) Included

- 20° Pitch
- 62" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 23.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165M Amps 0.5 on High RPM 116 on High Energy Star® No

INCLUDED CONTROLS

6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds.
- Reverse & Motor Off Lights On/Off with
- Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



371075 (Shown)

COORDINATING LIGHTING

To see the complete Roswell[™] Collection visit Kichler.com.



Wall Sconce 43305NI




Chandelier/Pendant 43301NI

HANGING MEASUREMENTS

	WITH 4.50"	DOWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	1
A: 14.25"	B: 14.25"	C: 12.75"	D: 6.75"	

AIR	PERFORM	ANCE
AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.

IRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
6467	36	181





- Im a fan | Oklahoma




Xety™ LED

Xety does more with less: the two innovative blades deliver air movement while the LED light brings brilliant illumination to a space. Authentic industrial hardware enhances the visual interest.





300702NI Brushed Nickel Finish, White Polycarbonate Lens, with Champagne Blades





INCLUDED FEATURES

Blades (2) Included

- 16° Pitch
- 56" Sweep
- Non-reversible
- Polycarbonate

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 3 Speed Wall Control Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 20.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.71 on High RPM 191 on High Energy Star® No



WALL TRANSMITTER -**FULL FUNCTION** - 3 Forward Speeds

- & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 337009 (Shown)

COORDINATING LIGHTING

To see the complete Erzo[™] Collection visit Kichler.com.



HANGING MEASUREMENTS

	WITH 4.50"	DOWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 13.75"	B: 11.00"	C: 5.50"	D: 5.75"	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
6258 82 76				



BLADE SPECS







I love this ceiling fan. It took minutes to install, it is exceptionally beautiful, and the quality of the piece is outstanding. You can not hear it when it is on, which is important because it is in my bedroom. I love the color, it is kind of an espresso wood color. Because mine is so beautiful, my mother went and bought one! I plan to have one in every room of my house.

- Kayla McCoy | Gibraltar, MI



The Japanese art of origami is known for turning a flat plane into a sculpture. Jade's intricately engineered folds work in harmony to move air effectively.





 Siver Blades

 White Polycarbonate

60" Jade LED

Fan Finish

AP

ntiqu Pewte

> NI ushed

lickel

OBB

Brushed ronze™

BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)

Satin

Black B300030

AP



Blades (3) Included

- 12° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No Control Wall Transmitter – Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 23.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.55 on High RPM 159 on High Energy Star[®] No



METAL CAPS

INCLUDED CONTROLS

Includes a metal fixture cap for non-light use.



COORDINATED LIGHTING


To see the complete Branches Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 13.75"	B: 12.75"	C: 9.25"	D: 6.75"	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5439	66	82		



Silver FB300030 NI	Br
Walnut FB300030	Oile



 $\star\star\star\star\star\star$

This ceiling fan has both a beautiful modern sleek design as well as superior functionality. The 60 inch span and unique design of the blades provides amazing air flow. The instructions were easy to follow and install was simple. I would highly recommend this product to anyone who wants an above average ceiling fixture.

- AshlyKaye | Orange, VA



Flyy™ LED

Nature knows best: With a blade shape and form modeled after the wings of a bird, the Flyy fan moves air with silent precision.



Flyy $\mbox{``}$ LED 310700OZ Olde Bronze $\mbox{``}$ Finish with Walnut Blades and Etched Cased Opal Glass (Shown with 360004OZ 48 $\mbox{''}$ Downrod) | Page 82

Shown: 310700WSP Weathered Steel Powder Coat Finish, Etched Cased Opal Glass, with Driftwood Blades

60" Flyy™LED

310700MWH Matte White Finish Matte White Blades Etched Cased Opal Glass

3107000Z Olde Bronze[®] Finish Walnut Blades Etched Cased Opal Glass

60" Flyy[™] LED



INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Damp Hanging Weight 15.4 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-188mm X 10mm Amps 0.46 on High RPM 160 on High Energy Star® No

HANGING MEASUREMENTS

non-light use.

WITH 6" DOWNROD			←D→	
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.25"	B: 13.50"	C: 10.75"	D: 6.75"	

AIR PERFORMANCE				
AIRFLOW	POWER	AIRFLOW		
Cubic Ft.	USAGE	EFFICIENCY		
Per Minute	Watts on High	Cubic Ft.		
on High	(Excludes	Per Minute		
	Lights)	Per Watt		

33

236

7656



the perfect amount of air. - MRRN | Michigan



Szeplo™ II LED

Inspired by industrial machinery, extruded aluminum blades are held by geometrically designed arm irons. Dimmable LED light adds perfect illumination to any room.




Szeplo[™] II LED 300300SBK Satin Black Finish with Satin Black Blades and Etched Cased Opal Glass (Shown with 360006SBK 72" Downrod) | Page 90



Shown:

300302WSP Weathered Steel Powder Coat Finish, Etched Cased Opal Glass, with Weathered Steel Blades



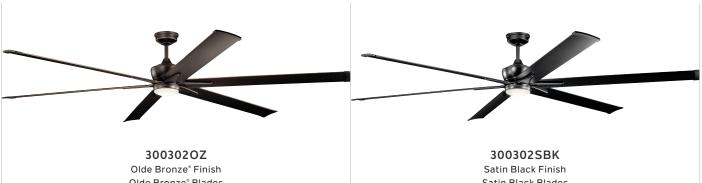

Olde Bronze® Blades Etched Cased Opal Glass

Satin Black Blades Etched Cased Opal Glass

INCLUDED FEATURES

Blades (6) Included

- 13° Pitch
- 96" Sweep
- Non-reversible
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Wet Hanging Weight 34.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165L Amps 0.39 on High RPM 63 on High Energy Star® No



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds. Reverse & Motor Off
 - Lights On/Off with
 - Full-Range Dimming - No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



371075 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.





HANGING MEASUREMENTS

WITH 6" DOWNROD			←D→	
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.25"	B: 14.00"	C: 8.75"	D: 6.75"	

AIR PERFORMANCE				
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW		
Per Minute	Watts on High	Cubic Ft.		
on High	(Excludes	Per Minute		
-	Lights)	Per Watt		

31

419

12854





KICHLER'S FANS ARE THE BEST!



Another great Kichler product! Having acquired this fan online, I was not sure about the materials and how it looked in person. The moment I "deboxed" and started putting this fan together, I knew it was another extremely great quality product from Kichler. This fan is huge, the blades are metal and can seriously put off some breeze. I also love the fact that if you are using it for outside and do not need the light kit, they already have a metal cover to go over it. Plus the wall mounted remote and switch is really convenient. I cannot praise Kichler enough, 2nd product from them and many more to come! - jerebob1430 | West Jefferson, NC



Shown: 3003010Z Olde Bronze[®] Finish, Etched Cased Opal Glass, with Olde Bronze[®] Blades

80" Szeplo" II LED



Satin Black Finish Satin Black Blades Etched Cased Opal Glass 300301WSP Weathered Steel Finish Weathered Steel Blades Etched Cased Opal Glass

Fan Finish

οz

Olde

Bronze

SBK

Satin

Black

BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)

Olde

Bronze° FB300302

ΟZ

Satin

Black

FB300302

SBK

INCLUDED FEATURES

Blades (6) Included

- 13° Pitch
- 80" Sweep
- Non-reversible
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Wet Hanging Weight 32.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165L Amps 0.52 on High RPM 91 on High Energy Star® No



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds. Reverse & Motor Off
- Lights On/Off with
 - Full-Range Dimming - No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



FULL FUNCTION 371075 (Shown)

METAL CAPS


Includes a metal fixture cap for non-light use.





HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.25"	B: 14.00"	C: 8.75"	D: 6.75"	



AIR PERFORMANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
9890	35	282





Shown: 300300SBK Satin Black Finish, Etched Cased Opal Glass, with Satin Black Blades

60" Szeplo™II LED



INCLUDED FEATURES

Blades (6) Included

- 13° Pitch
- 60" Sweep
- Non-reversible
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

 $\textbf{Uplight}\, N/A$

Uplight Glass N/A

Low Ceiling Adaptable No


Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Wet Hanging Weight 28.4 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165M Amps 0.5 on High RPM 140 on High Energy Star® No

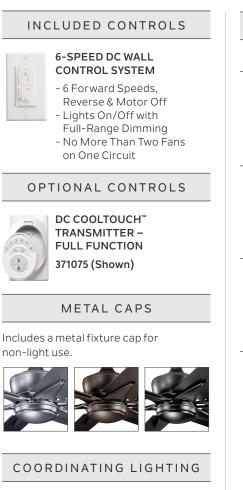


To see the complete Bensimone[™] Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.25"	B: 14.00"	C: 8.75"	D: 6.75"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
7308	32	225	







WSP



Bisc™ LED

With a seamless globe and fan combination, Bisc provides balanced airflow in a style that's elegant and understated.



 ${\rm Bisc}^{\approx}$ LED 300710PN Polished Nickel Finish with Silver Blades and Etched Cased Opal Glass (Shown with 360001PN Downrod) \mid Page 94




Shown: 300710PNC Polished Nickel Finish, Crushed Crystal Glass, with Black Blades





56" Bisc[™] LED



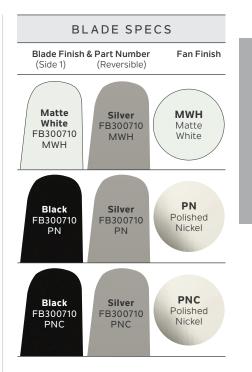

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 56" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Crushed Crystal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 15.4 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-188mm X 10mm Amps 0.26 on High RPM 166 on High Energy Star® No

6-SPEED DC WALL CONTROL SYSTEM

INCLUDED CONTROLS



- 6 Forward Speeds. Reverse & Motor Off - Lights On/Off with Full-Range Dimming - No More Than Two Fans on One Circuit


OPTIONAL CONTROLS



371075 (Shown)

COORDINATING LIGHTING

To see the complete Moonlit Collection visit elan-lighting.com.



В

HANGING MEASUREMENTS

	WITH 6" D	OWNROD	
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.50"	B: 10.50"	C: 9.75"	D: 6.25"

AIR PERFORMANCE				
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY		
Per Minute	e Watts on High Cubic Ft.			
on High	(Excludes	Per Minute		
Lights) Per Watt				
4879	17	285		





Ferron™

As sleek and aerodynamic as a high- tech propeller, Ferron employs pure physics to create robust amounts of air. The streamlined motor housing and contoured blades work together to fill a room with style and comfort.



Shown: 3001600BB Oil Brushed Bronze[™] Finish with Clear Oil Brushed Bronze[™] Blades

60" Ferron™

300160NI Brushed Nickel Finish Clear Champagne Blades



Polished Nickel Finish Clear Champagne Blades

Fan Finish

NI

Brushed

Nickel

OBB Oil Brushed

Bronze'

PN

Polished Nickel

INCLUDED FEATURES

Blades (2) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- Polycarbonate

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Cooltouch[™] Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 16.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.54 on High RPM 112 on High Energy Star[®] Yes

INCLUDED CONTROLS	BLADE SPECS
6-SPEED DC COOLTOUCH [™] CONTROL SYSTEM	Blade Finish & Part Number (Side 1) (Reversible)
 6 Forward Speeds, Reverse & Motor Off Lights On/Off with Full-Range Dimming No More Than Two Fans on One Circuit 	Clear Champagne FB300160 NI
OPTIONAL CONTROLS	
6-SPEED DC WALL TRANSMITTER – FULL FUNCTION	Oil Brushed Bronze [*] FB300160 OBB
370036 (Shown)	Clear Champagne FB300160 PN

HANGING MEASUREMENTS


WITH 6" DOWNROD				_	
	Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
	A: 16.00"	B: 15.25"	C: 7.25"	D: 6.00"	ļ

	←D→
1 1	
AB	C⊨→
<u>+</u> .⊂	

AIR	PERFORM	ANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
5236	32	167





- katiek85 | Dallas, TX



Terna™ LED

Terna offers the fun and whimsy of a pinwheel, modernized. The size and scale make it ideal for use in small spaces or in multiples. Think walk in closets, dining nooks or over a desk.



Terna[™] LED 300230NI Brushed Nickel Finish with Champagne Blades and Etched Cased Opal Glass (Shown with 300002NI 24" Downrod | Page 102



Shown: 3002300BB Oil Brushed Bronze[™] Finish, Etched Cased Opal Glass, with Oil Brushed Bronze[™] Blades

15" Terna™ LED



300230NI Brushed Nickel Finish Champagne Blades Etched Cased Opal Glass



300230WH White Finish White Blades Etched Cased Opal Glass

Fan Finish

NI

Brushed Nickel

OBB

Oil Brushed

Bronze[®]

WH

White



Blades (5) Included

- 0° Pitch
- 15" Sweep
- Non-reversible
- Polycarbonate

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No


Control Cooltouch[™] Control System – Full Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 15.9 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.25 on High RPM 318 on High Energy Star® No

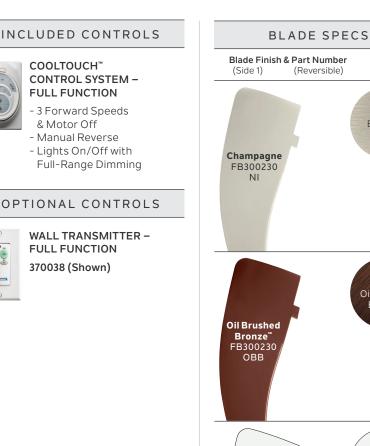


White


FB300230 WH

HANGING MEASUREMENTS

WITH 4.50" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 20.00"	B: 19.25"	C: 10.50"	D: 6.25"

AIR PERFORMANCE				
AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY				
Per Minute on High	Cubic Ft. Per Minute Per Watt			
Lights) Per Watt 359 32 11				





Terna[™]'s contoured blade design produces a unique outward airflow pattern to cool a wider area.



Link™

With a unique center ring, the dual blades of the Link fan seem to flow into one seamless piece. In motion, Link moves a generous amount of air while creating an orbital focal piece.



Shown: 300168NI Brushed Nickel Finish with Silver Blades

54" Link[™]



INCLUDED FEATURES

Blades (2) Included - 28° Pitch - 54" Sweep - Non-reversible - ABS Downrods Flush Mount Only Downlight N/A Downlight Glass N/A Optional Downlight N/A Uplight Glass N/A Low Ceiling Adaptable No Control 6-Speed DC Cooltouch[™] Control System

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 8" cETL Listed Indoor Hanging Weight 18.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.54 on High RPM 132 on High Energy Star[®] Yes



INCLUDED CONTROLS

6-SPEED DC COOLTOUCH[™] CONTROL SYSTEM

 6 Forward Speeds, Reverse & Motor Off Lights On/Off with Full

-Range Dimming - No More Than Two Fans

on One Circuit


OPTIONAL CONTROLS

6-SPEED DC WALL TRANSMITTER 370036 (Shown)



HANGING MEASUREMENTS

FLUSH MOUNT			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 24.25"	B: 24.25"	C: 7.90"	D: 8.00"



AIR PERFORMANCE			
AIRFLOW	POWER	AIRFLOW	
Cubic Et	USAGE	FEFICIENCY	

	I OWER	
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
5780	31	184









Kichler® Fans

Grand in scale or small in stature. Inside living or outdoor entertaining. Our extensive collection leaves no detail to chance, with unique designs that not only look beautiful but move air efficiently and effectively.







TWO-TONE METAL ACCENTS


Shown: 300270SBK Satin Black Finish, White Polycarbonate, with Satin Black Blades

56" Incus™LED



300270WH White Finish White Blades White Polycarbonate

56" Incus[™] LED



Blades (3) Included

- Variable Pitch
- 56" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System -Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 15 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 16mm, AC Amps 0.48 on High RPM 120 on High Energy Star® No

INCLUDED CONTROLS	BLAD	E SPE
65K WALL CONTROL	Blade Finish & Par (Side 1) (Re	r t Number eversible)
FUNCTION - 3 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full-Range Dimming	Satin Black FB300270 SBK	
OPTIONAL CONTROLS	Satin	
65K COOLTOUCH [™] TRANSMITTER – FULL FUNCTION 370006 (Shown)	Satin Natural Bronze FB300270 SNB	
• COORDINATING LIGHTING	White FB300270 WH	
o see the complete Lakum [®] Collection sit Kichler.com.		




То vis



Pendant 43090CLP

WITH 6" DOWNROD			
Fixture Drop (from ceiling) Blade Drop (from ceiling) Housing (width) Ceiling Canopy (width)			
A: 13.75"	B: 12.75"	C: 9.25"	D: 6.75"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5277 57 93			



Shown: 300031BSS Brushed Stainless Steel Finish, Frosted White Polycarbonate Lens, with Black Blades

52" Kosmus

300031MWH Matte White Finish Matte White Blades Frosted White Polycarbonate Lens

300031SBK Satin Black Finish Black Blades Frosted White Polycarbonate Lens



52" Kosmus



Blades (3) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Frosted White Polycarbonate Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

 $\textbf{Control} ~ \textsf{CoolTouch}^{\scriptscriptstyle \mathbb{M}} - \textsf{Limited} ~ \textsf{Function}$

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cETL Listed Indoor Hanging Weight 14.8 lbs. Body Material Steel Warranty Limited Lifetime


MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC Amps 0.6 on High RPM 207 on High Energy Star® No

	COOLTOUCH ^{**} TRANSMITTER – LIMITED FUNCTION - 3 Forward Speeds & Motor Off - Manual Reverse - Lights On/Off with Full-Range Dimming
ΟP	TIONAL CONTROLS
	65K WALL CONTROL SYSTEM – LIMITED FUNCTION 371042 (Shown)

371082

INCLUDED CONTROLS

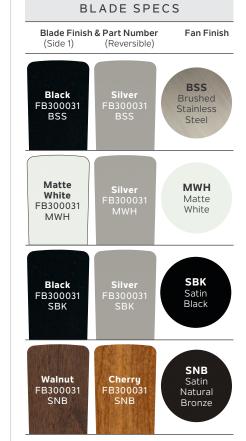

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.00"	B: 12.50"	C: 7.50"	D: 6.00"

	←D→
1 1	
AB	C⊣∽⊐→
+	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5460 73 75				



Shown: 3000325BK Satin Black Finish, Frosted White Polycarbonate Lens, with Satin Black Blades

48" volos



Frosted White Polycarbonate Lens

300032MWH Matte White Finish Matte White Blades Frosted White Polycarbonate Lens



Satin Natural Bronze Finish Walnut Blades Frosted White Polycarbonate Lens

Blades (3) Included

- Variable Pitch
- 48" Sweep
- Non-reversible
- ABS

Downrods Flush Mount Only

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Frosted White Polycarbonate Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control – Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 12" cETL Listed Indoor Hanging Weight 15 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.48 on High RPM 226 on High Energy Star® No



INCLUDED CONTROLS

65K WALL CONTROL -FULL FUNCTION - 3 Forward Speeds,

Reverse & Motor Off - Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 370006 (Shown)

> Α В




FLUSH MOUNT			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 10.25"	B: 7.75"	C: 7.75"	D: 7.75"

RM	ANCE	
- D		

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
3941 57 69				

Shown: 300275NI Brushed Nickel Finish, Etched Cased Opal Glass, with Black Blades

52" Spyn LED

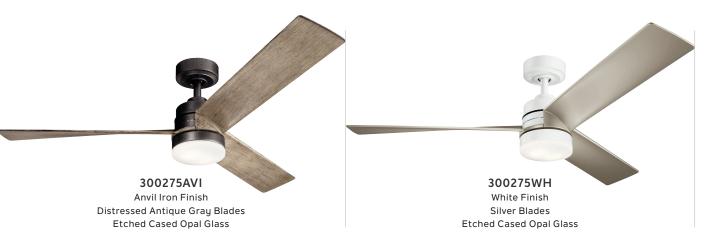

52" Spyn LED



Blades (3) Included

- 13° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Dual Slide Control

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 13.5 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC Amps 0.53 on High RPM 162 on High Energy Star® No

INC	CLUDED CONTROLS	
	DUAL SLIDE CONTROL - All-Speed Fan & Light Control - Controls One Fan and Light - Full-Range Dimming Light Control - Faceplate Included - For Use with Most Ceiling Fans	Bladd (Side Distre Anti Gra FB300 AV
	65K WALL CONTROLS SYSTEM – LIMITED FUNCTION 371042 (Shown) 371082	Bla FB30 N Silv FB30
To see mo visit Kichl	RDINATING LIGHTING ore from these collections ler.com. Grand Bank [™] 43189DAG	

sec AVI UG Anvil Iron NI 0275 Nickel

WН White


Roswell™ 43304NI

HANGING MEASUREMENTS

WITH 6" DOWNROD			
Fixture Drop (from ceiling)Blade Drop (from ceiling)Housing (width)Ceiling Canopy (width)			
A: 14.50"	B: 9.00"	C: 7.00"	D: 6.00"

AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
5056 63 80					





BLADE SPECS le Finish & Part Number Fan Finish de 1) (Reversible) Brushed



310155NI Brushed Nickel Finish, Etched Cased Opal Glass, with Nickel Blades

60" Rana™ LED



Fan Finish

NI

Brushed

Nickel

SBK

Satin

Black

BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)

Nickel

FB310155

NI

Satin

Black FB310155

SBK

INCLUDED FEATURES

Blades (3) Included

- 35° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter – Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 25.1 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.59 on High RPM 206 on High Energy Star® No

e e	WALL TRANSMITTER – FULL FUNCTION
	- 3 Forward Speeds & Motor Off - Manual Reverse - Lights On/Off with Full-Range Dimming
ΟP	TIONAL CONTROLS

INCLUDED CONTROLS



FULL FUNCTION 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



WITH 6" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 15.75"	B: 14.50"	C: 8.75"	D: 5.75"		

	←D→
↑ ↑ A B	
ĨĪ	
↓)

AIR	PERFORM	ANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
8536	70	121







38"/48"/58" Arkwright[™] Motor Assembly



300146OBB Oil Brushed Bronze[™] Motor Assembly Finish 3700250BB 38" Walnut Blades 3382030BB LED Light Kit (Blades and Light Kit Sold Separately)



300146AP Antique Pewter Motor Assembly Finish 370030AP 58" Clear Black Blades (Blades Sold Separately)



300146PN Polished Nickel Motor Assembly Finish 370027PN 58" Sapelle Blades (Blades Sold Separately)

300146AP

Antique Pewter

Motor Assembly Finish

370027AP 58" Cherry Blades

(Blades Sold Separately)





300146OBB Oil Brushed Bronze" Motor Assembly Finish 3700300BB 58" Clear Oil Brushed Bronze" Blades (Blades Sold Separately)



300146AP Antique Pewter Motor Assembly Finish 370025AP 38" Light Cherry Blades (Blades Sold Separately)




300146WH White Motor Assembly Finish 370030WH 58" Clear White/ Silver Speck Blades (Blades Sold Separately)

38"/48"/58" Arkwright[™] Motor Assembly

Blade Material

Blade Length

See pages 122-123.

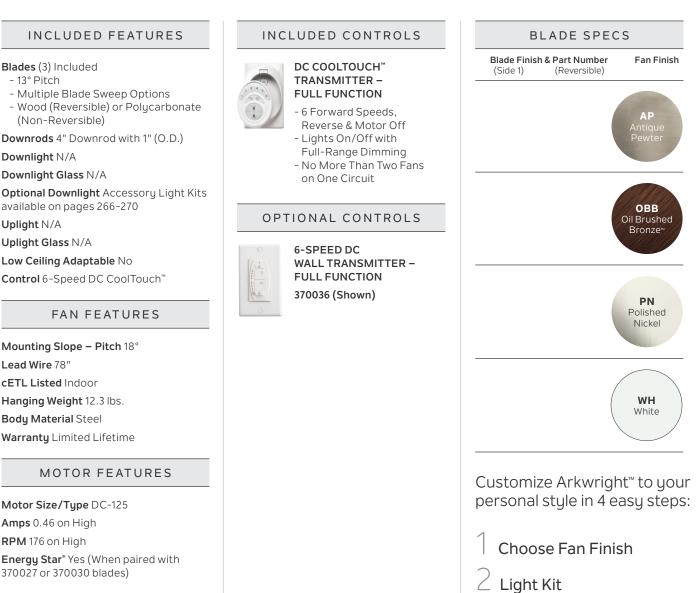

HANGING MEASUREMENTS

	WITH 4" D	OWNROD			←D→
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	↑ ↑ A B 	C
A: 15.25"	B: 12.75"	C: 7.50"	D: 6.00"	_↓↓.⊂	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5779	32	178		

Blades (3) Included

(Non-Reversible)

Downlight Glass N/A

available on pages 266-270

Low Ceiling Adaptable No

Mounting Slope - Pitch 18°

- 13° Pitch

Downlight N/A

Uplight N/A Uplight Glass N/A

Lead Wire 78" cETL Listed Indoor Hanging Weight 12.3 lbs.

Body Material Steel Warranty Limited Lifetime

Motor Size/Type DC-125 Amps 0.46 on High RPM 176 on High

370027 or 370030 blades)



Kichler.com 121

Arkwright[™] Ordering Guide





LED 338203AP, OBB, PN, WH


Etched Cased Opal Glass 17W LED Platform, 1,600 Lumens, 80 CRI, 3,000K CCT, 2.00" H x 7.50" D, Module Included

Incandescent

380047AP, OBB, PN, WH

Etched Cased Opal Glass (1) E11, 100W Halogen, 2.00" H x 7.50" D, Lamp Included

Fan Body Finish	Optional Light Kit - LED	Optional Light Kit - Incandescent
Antique Pewter - 300146AP	338203AP	380047AP
Oil Brushed Bronze [™] - 300146OBB	338203OBB	3800470BB
Polished Nickel - 300146PN	338203PN	380047PN
White - 300146WH	338203WH	380047WH

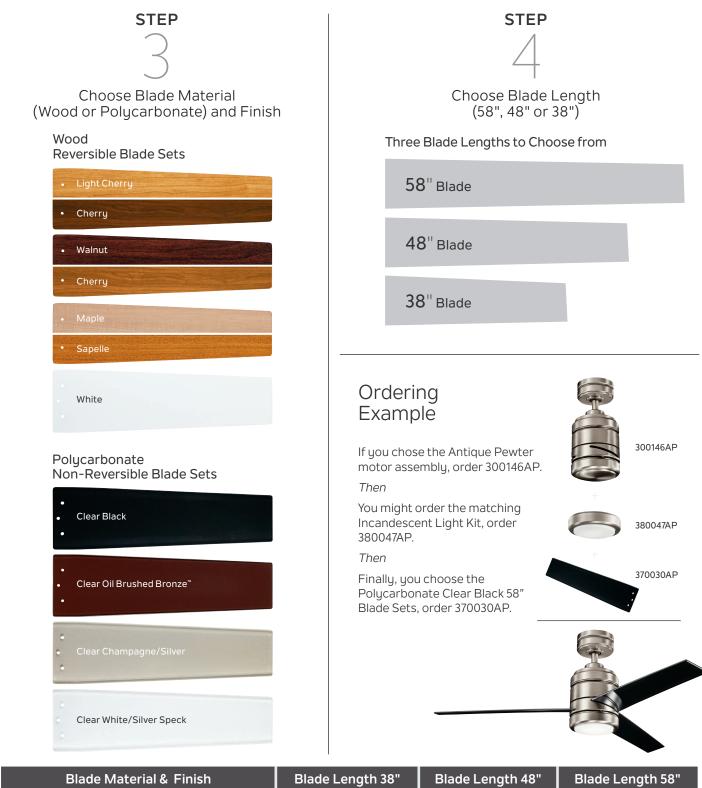

Blade Material & Finish	Blade Length 38"	Blade Length 48"	Blade Length 58"
Reversible Wood - Light Cherry/Cherry Blades	370025AP	370026AP	370027AP
Reversible Wood - Walnut/Cherry Blades	3700250BB	3700260BB	3700270BB
Reversible Wood - Maple/Sapelle Blades	370025PN	370026PN	370027PN
Reversible Wood - White Blades	370025WH	370026WH	370027WH
Polycarbonate - Clear Black Blades	370028AP	370029AP	370030AP
Polycarbonate - Clear Oil Brushed Bronze" Blades	3700280BB	3700290BB	3700300BB
Polycarbonate - Clear Champagne/Silver Blades	370028PN	370029PN	370030PN
Polycarbonate - Clear White/Silver Speck Blades	370028WH	370029WH	370030WH

Note: Fan blades can be used with any Motor Housing Finish.





Blades (3) Included - 13° Pitch - 52" Sweep - Non-reversible - ABS **Downrods** 4.50" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 266-270 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 13.4 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.43 on High RPM 177 on High Energy Star® No



PULL CHAIN

INCLUDED CONTROLS

338629 MWH, WCP, WSP Etched Cased Opal Glass, 17W Dimmable Integrated LED Platform, 1,600 lm, 80 CRI, 3,000K



7.50" Dia. x 3.25" H



HANGING MEASUREMENTS

WITH 4.5" DOWNROD						
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)			
A: 13.5"	B: 11.00"	C: 7.50"	D: 6.00"			

+	C	

Α В


AIR	PERFORM	ANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
5024	49	103



Shown: **310112CMO** Coffee Mocha Finish with Coffee Mocha Blades

54" Lehr"II

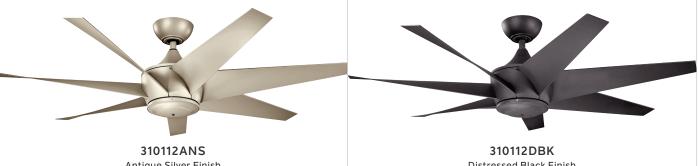

Antique Silver Finish Antique Satin Silver Blades Distressed Black Finish Distressed Black Blades

Blades (7) Included

- 12° Pitch
- 54" Sweep
- Non-reversible
- ABS

Downrods 8" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC CoolTouch[™] Control System

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Wet Hanging Weight 15.2 lbs. Body Material ABS Warranty Limited Lifetime


MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.54 on High RPM 106 on High Energy Star[®] Yes

INCLUDED CONTROLS	BLAD
6-SPEED DC COOLTOUCH [™] CONTROL SYSTEM	Blade Finish & Par (Side 1) (Re
 - 6 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full-Range Dimming - No More Than Two Fans on One Circuit 	Antique Satin Silver FB310112 ANS
OPTIONAL CONTROLS	Coffee
6-SPEED DC WALL TRANSMITTER – FULL FUNCTION	Mocha FB310112 CMO
370036 (Shown)	Distressed Black FB310112 DBK

BLADE SPECSBade Finish & Part Number
(Bide 1)Fan Finish(Side 1)(Reversible)Fan FinishAntique
Satin
Silver
B310112
CMOANS
Antique
Satin
SilverCoffee
Mocha
FB310112
CMOCHO
Coffee
MochaDistressed
Black
FB310112
DBKCBK
Date
Distressed
Black
Date

WITH 8" DOWNROD				_	
	Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
	A: 15.50"	B: 13.50"	C: 10.25"	D: 6.75"	



AIR	PERFORM	ANCE


AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
5133	31	165





Shown: 310115ANS Antique Satin Silver Finish with Antique Satin Silver Blades

$80^{\prime\prime} \, \text{Lehr}^{\ast} \, \text{II}$

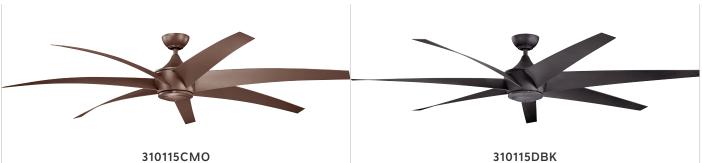

310115CMO Coffee Mocha Finish Coffee Mocha Blades 310115DBK Distressed Black Finish Distressed Black Blades

Blades (7) Included - 12° Pitch - 80" Sweep - Non-reversible - ABS Downrods 8" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC CoolTouch[™] Control System

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Wet Hanging Weight 22 lbs. **Body Material ABS** Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165L Amps 0.56 on High RPM 78 on High Energy Star® No

INC	LUDED CONTROLS	BLA
	6-SPEED DC COOLTOUCH [™] CONTROL SYSTEM	Blade Finish & F (Side 1)
2 4 5 6 2 4 5 6 7 6 2 4 5 6 7 6 7 6 7 6 7 6 7 6 7 6 7 6 7 6 7 6	 - 6 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full-Range Dimming - No More Than Two Fans on One Circuit 	Antique Satin Silver FB310115 ANS
OPT	IONAL CONTROLS	Coffee
0	6-SPEED DC WALL TRANSMITTER - FULL FUNCTION	Mocha FB310115 CMO
0	370036 (Shown)	Distressed Black FB310115 DBK
COOR	DINATING LIGHTING	BBR

To see the complete LED Outdoor Wall Collection visit Kichler.com.



Part Number Fan Finish (Reversible) ANS Antique Satin Silver смо Coffee Mocha DBK Distressed Black

HANGING MEASUREMENTS

	WITH 8" D	OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	↓ ↓ A B
A: 15.50"	B: 13.50"	C: 10.25"	D: 6.75"	↓↓.⊂

Per Minute

Per Watt

237

AIR PERFORMANCE		
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.

(Excludes

Lights)

33

on High

7744








Wall Sconce 11309BKTLED Shown: 310204WH White Finish, Etched Cased Opal Glass, with Whites Blades

52" Cameron™

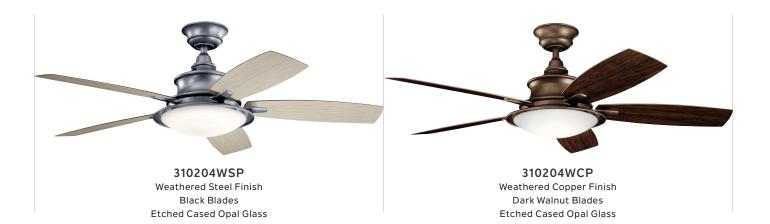

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 23W Dimmable, 2300 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control CoolTouch[™] Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 26.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.52 on High RPM 165 on High Energy Star® No

WIT

(from ceiling)

B: 12.00"

Fixture Drop

(from ceiling)

A: 16.25"

WITH 4" DOWNROD			
Blade Drop	Housing	Ceiling Canopy	


(width)

D: 7.00"

(width)

C: 14.75"

HANGING MEASUREMENTS



AIR	PERFORMANCE	

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
4955	62	79




INCLUDED CONTROLS

COOLTOUCH[™] TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse - Lights On/Off with
- Full-Range Dimming

OPTIONAL CONTROLS







Shown: 300239NI Brushed Nickel Finish, Etched Cased Opal Glass, with Walnut Blades

56" Ellys LED



Walnut Blades Etched Cased Opal Glass

56" Ellys LED



Blades (7) Included

- 14° Pitch
- 56" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

 $\textbf{Uplight}\, N/A$

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 18.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

AIR PERFORMANCE

POWER

USAGE

Watts on High

(Excludes

Lights)

30

AIRFLOW

Cubic Ft.

Per Minute

on High

6306

Motor Size/Type DC-165M Amps 0.51 on High RPM 156 on High Energy Star® No

INCLUDED CONTROLS

6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds,
- Reverse & Motor Off - Lights On/Off with
 - Full-Range Dimming
 - No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH[™] TRANSMITTER – FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see the complete Cirus[™] Collection visit Kichler.com.





HANGING MEASUREMENTS

	WITH 6" D	OWNROD		-
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 17.00"	B: 12.75"	C: 9.50"	D: 6.75"	

AIRFLOW


EFFICIENCY

Cubic Ft.

Per Minute

Per Watt

202



BLADE SPECS





Shown: 330090AVI Anvil Iron Finish with Walnut Blades and Frosted White Glass





Blades (5) Included

- 12° Pitch
- 44" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17 Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Frosted White

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control 65K Wall Control – Full Function

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cETL Listed Indoor Hanging Weight 11 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 12mm, AC Amps 0.42 on High RPM 192 on High Energy Star® No

•	
-	
KOLON*	

INCLUDED CONTROLS

65K WALL CONTROL -**FULL FUNCTION**

- 3 Forward Speeds. Reverse & Motor Off - Lights On/Off with
 - Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 370006 (Shown)





HANGING MEASUREMENTS

D: 6.50"

	WITH 6" D	OWNROD	
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.25"	B: 13.50"	C: 7.75"	D: 6.50"
FLUSH MOUNT			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)

Fixture Drop	Blade Drop	Housing	(
(from ceiling)	(from ceiling)	(width)	
A: 10.25"	B: 8.50"	C: 7.75"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3445	52	116	

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3191	51	66	

DRAMATIC _____

Shown: 300251NI Brushed Nickel Finish, Satin Etched Glass, with Silver Blades

54" Skye™LED



54" Skye[™] LED

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 54" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Includes(2) 5W **Dimmable Lamp**

Downlight Glass Satin Etched Glass Optional Downlight See pages 266-270

Uplight Uses (2) B10, 5W LED Bulbs Uplight Glass N/A

Low Ceiling Adaptable No **Control** Wall Transmitter – Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 30 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.82 on High RPM 194 on High Energy Star® No

e	WALL TRA FULL FUN
	- 3 Forward & Motor (- Manual R - Lights On

INCLUDED CONTROLS

NSMITTER -CTION d Speeds

- Off
- Reverse
- n/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 337009 (Shown)



WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.00"	B: 11.75"	C: 13.75"	D: 6.75"	

	←D→
↑ ↑ A B 	c ⊨
L	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6637	97	68	



BRONZE MESH ACCENTS

Shown: 3003520Z Olde Bronze[®] Finish, Etched Cased Opal Glass, with Weathered Medium Oak Blades

52" Chiara LED



52" Chiara LED

INCLUDED FEATURES

Blades (3) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- Wood

Downrods Flush Mount Only

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Low Ceiling Adaptable

Control 65K Wall Control System -Limited Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 8" cETL Listed Indoor Hanging Weight 18.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 20mm, AC Amps 0.45 on High RPM 189 on High Energy Star® No

INCLUDED CONTROLS



SYSTEM – LIMITED FUNCTION

- 3 Forwards Speeds & Motor Off
- Manual Reverse - Lights On/Off with
- Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -LIMITED FUNCTION 370005 (Shown)

COORDINATING LIGHTING


To see more from these collections visit Kichler.com

Cartone™ 42525OZ Kinny™ 43488OZ Fiona 42495OZ

HANGING MEASUREMENTS

FLUSH MOUNT			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 10.50"	B: 7.50"	C: 7.00"	D: 7.00"

AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
4245	54	79



BLADE SPECS Blade Finish & Part Number Fan Finish (Side 1) (Reversible) athered οz dium Oa Olde B300352 Bronze NI Driftwood Brushed FB300352 NI Nickel



Shown: 3002560BB Oil Brushed Bronze[™] Finish, Etched Cased Opal Glass, with Walnut Blades

60" Trevor®IILED



Brushed Stainless Steel Finish Walnut Blades Etched Cased Opal Glass

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 23W Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Control – Full Function

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 34.5 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.66 on High RPM 138 on High Energy Star® No





- 3 Forward Speeds

- & Motor Off
- Lights On/Off with Full-Range Dimming


OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 337009 (Shown)



WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.00"	B: 11.75"	C: 14.00"	D: 5.75"



AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
6039	80	76





and the second s

Fan Finish

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood Veneer

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

 $\textbf{Uplight Glass}~\mathsf{N/A}$

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 11.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 212mm X 20mm, AC Amps 0.69 on High RPM 144 on High Energy Star[®] No




PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS


65K WALL CONTROL SYSTEM – LIMITED FUNCTION 371042 (Shown) 337001 371082





ORY LOCATIONS

WITH 4.50" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.50"	B: 13.50"	C: 12.25"	D: 6.75"



AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
6698	82	81



300024AP Antique Pewter Finish, Etched Cased Opal Glass, with Cherry Blades

52" Lacey" II LED



52" Lacey[™] II LED

Kichler.com 145



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

 $\textbf{Uplight}\, N/A$

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 19.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.48 on High RPM 174 on High Energy Star® No

INCLUDED CONTROLS

6-SPEED DC WALL CONTROL SYSTEM



- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH[™] TRANSMITTER – FULL FUNCTION

371075 (Shown)


COORDINATING LIGHTING

To see the complete Lacey[™] Collection visit Kichler.com.



WITH 6" DOWNROD				
Fixture DropBlade DropHousingCeiling Canopy(from ceiling)(from ceiling)(width)(width)				
A: 16.75"	B: 11.75"	C: 11.00"	D: 6.75"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5748	35	166	







Shown: 300027AP Antique Pewter Finish, Etched Cased Opal Glass, with Weathered White Walnut Blades

52" Ridley" II LED

Subset of the second se



Etched Cased Opal Glass

Blades (3) Included

- 14° Pitch
- 52" Sweep
- Non-reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1)

17W Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No


Control Wall Transmitter – Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 17.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 18mm, AC Amps 0.44 on High RPM 143 on High Energy Star® No



WALL TRANSMITTER – LIMITED FUNCTION - 3 Forward Speeds & Motor Off

- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH[™] TRANSMITTER – LIMITED FUNCTION 337214TR (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



COORDINATING LIGHTING

To see the complete Maclain Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 16.25"	B: 13.25"	C: 6.75"	

AIR PERFORMANCE				
AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY				
Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt		
4388	50	87		

	←D→
↑ B	C H





3102400Z Olde Bronze[®] Finish, Clear Seeded Glass, with Dark Walnut Blades

60" Lyndon Patio



310240WSP Weathered Steel Finish Teak Blades Clear Seeded Glass

Fan Finish

ΟZ

Olde

Bronze

BLADE SPECS

(Reversible)

Dark

Walnut

FB310240

ΟZ

Walnut

FB310240

WSP

Blade Finish & Part Number

(Side 1)

Medium

Walnut

FB310240

ΟZ

Teak

FB310240

WSP

INCLUDED FEATURES

Blades (5) Included

- 13° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight 5W, Non-Dimmable, LED Bulbs

Downlight Glass Clear Seeded Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 12.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.64 on High RPM 127 on High Energy Star® No

INCLUDED CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds
- & Motor Off
- Manual Reverse - Lights On/Off with
- Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see the complete Lyndon[™] Collection visit Kichler.com.




Wall 49444AZ

HANGING MEASUREMENTS

WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 19.00"	B: 13.25"	C: 9.50"	D: 6.75"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW	

Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
5393	74	72



60" KICHLER LYNDON[™] PATIO CEILING FAN $\star\star\star\star$ This is an amazing ceiling fan. It was very easy to install and works great. I love that I don't have to worry about it getting wet and breaking during a bad storm since its meant for outdoor use however, you're able to use it indoors also.

- Melissa M | Florida



310239DBK Distressed Black Finish, Clear Seeded Glass, with Light Walnut Blades

52" Lyndon Patio



Blades (5) Included

- 13° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight 5W, Non-Dimmable, LED Bulbs

Downlight Glass Clear Seeded Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 10.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 15mm, AC Amps 0.54 on High RPM 161 on High Energy Star® No

AIR PERFORMANCE

POWER

USAGE

Watts on High

(Excludes

Lights)

65

AIRFLOW

Cubic Ft.

Per Minute

on High

4946

INCLUDED CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds
- & Motor Off
- Manual Reverse - Lights On/Off with
- Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see the complete Lyndon[™] Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 4.50" DOWNROD						
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)			
A: 19.00"	B: 13.25"	C: 9.50"	D: 6.75"			

AIRFLOW


EFFICIENCY

Cubic Ft.

Per Minute

Per Watt

77



BLADE SPECS



Shown: 310170AVI Anvil Iron Finish, Etched Cased Opal Glass, with Distressed Antique Gray Blades

$60^{\prime\prime} \text{ Ahrendale} \text{ LED}$



Blades (5) Included

- 12° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No


Control 65K Wall Control System – Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Wet Hanging Weight 34 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.6 on High RPM 145 on High Energy Star[®] No



65K WALL CONTROL SYSTEM – FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH[™] TRANSMITTER – FULL FUNCTION 370006 (Shown)

COORDINATING LIGHTING


To see the complete Ahrendale[™] LED Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.50"	B: 9.75"	C: 11.75"	D: 6.75"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5763	72	80	






BLADE SPECS





65" Eads™ Patio XL





Blades (4) Included - 14° Pitch - 65" Sweep - Non-reversible - ABS Downrods 4.50" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 266-270 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 34 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.87 on High RPM 139 on High Energy Star® No



INCLUDED CONTROLS



Outdoor


49869WZC

Post

Outdoor Pendant 49867WZC

WITH 4.50" DOWNROD				←D→	
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B 	C
A: 14.00"	B: 11.00"	C: 11.00"	D: 7.25"	↓↓.⊏) T


AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
8130	101	81





52" Eads" Patio



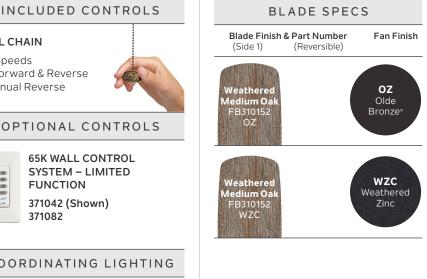

Blades (4) Included - 14° Pitch - 52" Sweep - Non-reversible - ABS Downrods 4.50" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 266-270 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 25 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.66 on High RPM 201 on High Energy Star® No




HANGING MEASUREMENTS

	WITH 4.50"	DOWNROD		_	
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	ļ	[▲ ∣
A: 14.00"	B: 11.00"	C: 11.00"	D: 7.25"		ļ

AIR PERFORMANCE			
AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY			
Per Minute	Watts on High	Cubic Ft.	
on High	(Excludes	Per Minute	
Lights) Pe		Per Watt	

78

5904



PULL CHAIN

- 3-Speeds

COORDINATING LIGHTING

To see the complete Andover Collection visit Kichler.com.


49867WZC

76



310136OZ Olde Bronze[®] Finish, Etched Cased Opal Glass, with Olde Bronze[®] Blades

65" Maor Patio LED

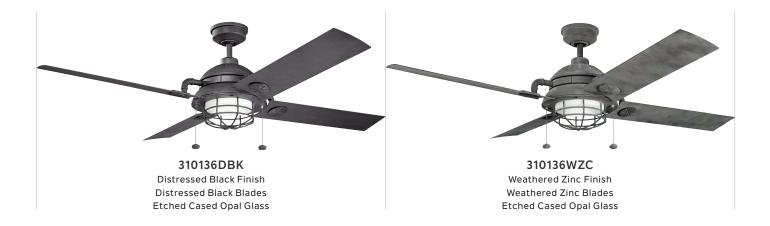



Blades (4) Included

- 13° Pitch
- 65" Sweep
- Non-reversible
- Aluminum

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Damp Hanging Weight 38.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 212mm X 20mm, AC Amps 0.72 on High RPM 132 on High Energy Star® No

FULLCI		
- 3-Speed - 3 Forwa - Manual	ard & Reverse	
OP	TIONAL CONTROLS	
	65K WALL CONTROL SYSTEM – LIMITED FUNCTION	
XOLER W D+	371042 (Shown) 371082	


INCLUDED CONTROLS

PULL CHAIN



HANGING MEASUREMENTS

WITH 4.50" DOWNROD					
	Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
	A: 17.50"	B: 12.00"	C: 13.00"	D: 6.75"	



AIR PERFORMANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
8093	90	90





Store:

300457AP Antique Pewter Finish, Etched Cased Opal Glass, with Black Cherry Blades

52" Leeds" LED



52" Leeds[™] LED



Blades (5) Included

- 13° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 25.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.59 on High RPM 189 on High Energy Star® No

Fixture Drop

(from ceiling)

A: 17.00"

C	WALL TRANSMITTER – LIMITED FUNCTION - 3 Forward Speeds & Motor Off - Manual Reverse - Lights On/Off with Full-Range Dimming
OP	TIONAL CONTROLS
	COOLTOUCH [™] TRANSMITTER – LIMITED FUNCTION 337214TR (Shown)

INCLUDED CONTROLS

COORDINATING LIGHTING

To see the complete Joelson[™] Collection visit Kichler.com.



Α В

Blade Finish & Part Number Fan Finish (Side 1) (Reversible) Light Cherry FB300457 AP Black AP Cherry FB300457 Pewte AP NI **Silver** FB300457 NI Black Brushed FB300457 Nickel NI Cherry FB300457 OBB OBB Walnut Oil Brushed FB300457 OBB Bronze™

BLADE SPECS



			1
AIR	PERFORM	ANCE	(
AIRFLOW	POWER	AIRFLOW	

WITH 4.50" DOWNROD

Housing

(width)

C: 10.25"

AIR	PERFORM	ANCE
LOW	POWER	AIRFLOV

Blade Drop

(from ceiling)

B: 13.00"

	FOWER	
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
6326	70	90



Ceiling Canopy

(width) D: 6.25"

Store:

Snown: 3002380LZ Oiled Bronze[®] Finish, Etched Cased Opal Glass, with Medium Chery Blades

52" Carlson[™] LED



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Dimmable, 1600 Lumens, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 20.1 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.6 on High RPM 183 on High Energy Star® No

INCLUDED CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION - 3 Forward Speeds

- & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)


COORDINATING LIGHTING

To see the complete Circolo[™] Collection visit Kichler.com.



WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.50"	B: 11.50"	C: 12.00"	D: 6.50"

AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
6195	71	88






Shown: 310181WZC Weathered Zinc Finish, Cased Opal Glass, with Weathered White Walnut Blades

54" Seaside LED





Blades (4) Included

- 14° Pitch
- 54" Sweep
- Reversible (SBK)
- Non-Reversible (WZC)
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 3000K

Downlight Glass Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No


Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Wet Hanging Weight 35.4 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.5 on High RPM 167 on High Energy Star[®] No

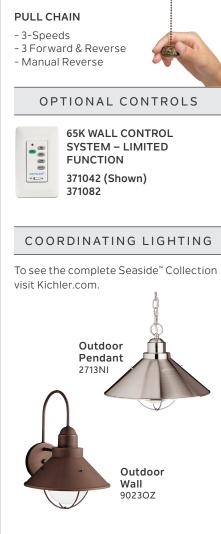

INCLUDED CONTROLS

	WITH 6" D	OWNROD		- <u></u>
Fixture Dro (from ceilin	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	î î A B
A: 20.00	 B: 10.50"	C: 15.00"	D: 6.25"	J

	DOWED	
AIR	PERFORM	ANCE

AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
5564	60	93





310206MWH Matte White Finish with Weathered White Walnut Blades

70" Monarch[™] Patio



Blades (5) Included - 16° Pitch - 70" Sweep - Non-reversible - ABS **Downrods** 6" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 266-270 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control Wall Transmitter -Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 30.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 212mm X 25mm, AC Amps 0.78 on High RPM 122 on High Energy Star® No

INCLUDED CONTROLS		
e e	WALL TRANSMITTER – FULL FUNCTION	
88	- 3 Forward Speeds	
KICHLIDER	& Motor Off	
Θ	- Manual Reverse	

- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS




TRANSMITTER -FULL FUNCTION 337009 (Shown)

BL	ADE SPECS
	(Reversible)
Weathered White Walnut FB310206 MWH	MWH Matte White
Brown FB310206 WCP	WCP Weathered Copper
Weathered White Walnut FB310206 WSP	WSP Weathered Steel

HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 18.25"	B: 16.25"	C: 15.00"	D: 6.75"	



AIR PERFORMANCE

AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
8398	94	89






70" Monarch™



70" Monarch[™]



Blades (5) Included - 16° Pitch - 70" Sweep - Reversible - Wood Downrods 6" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 266-270 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Wall Transmitter – Full Function

FAN FEATURES

Mounting Slope - Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 30.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 212mm X 25mm, AC Amps 0.8 on High RPM 128 on High Energy Star® No



INCLUDED CONTROLS

WALL TRANSMITTER -**FULL FUNCTION** - 3 Forward Speeds & Motor Off - Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 337009 (Shown)

COORDINATING LIGHTING

To see the complete Missoula[™] Collection visit Kichler.com.



OPTIONAL BLADE SET




371050 Weathered White Walnut Solid Wood Blades

HANGING MEASUREMENTS

	WITH 6" D	OWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 18.00"	B: 16.25"	C: 15.00"	D: 6.75"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
9411	97	97	





BLADE SPECS

Shown: 3394130Z Olde Bronze[®] Finish, Satin Etched Glass, with Walnut Blades

$52^{\prime\prime}\,\,\text{Monarch}^{\,\,\text{Monarch}}\,\,\text{II}\,\,\text{Select}\,\,\text{LED}$



339413BAP7 Burnished Antique Pewter Finish Weathered White Walnut Blades Satin Etched Glass



1

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight B10, 4W LED Lamps

Downlight Glass Satin Etched Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control CoolTouch[™] Transmitter – Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 24.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.68 on High RPM 163 on High Energy Star® No

COOLTOUCH" TRANSMITTER – LIMITED FUNCTION - 3 Forward Speeds & Motor Off - Manual Reverse - Lights On/Off with Full-Range Dimming OPTIONAL CONTROLS WALL TRANSMITTER – LIMITED FUNCTION 370039 (Shown)

INCLUDED CONTROLS

COORDINATING LIGHTING


To see the complete Missoula[™] Collection visit Kichler.com.



Pendant 78200AP

WITH 4" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 19.00"	B: 12.00"	C: 13.75"	D: 6.75"		

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5472	81	68	









Shown: 339013OBB Oil Brushed Bronze[™] Finish with Walnut Blades

52" Monarch[™]II



339013TZ Tannery Bronze[™] Finish Teak Blades



339013BAP7 Weathered White Walnut Finish Dark Cherry Blades

Fan Finish

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control CoolTouch[™] Transmitter – Limited Function

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 20.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.63 on High RPM 176 on High Energy Star® No

INCLUDED CONTROLS	BLADE SPE
COOLTOUCH [™] TRANSMITTER –	Blade Finish & Part Number (Side 1) (Reversible)
LIMITED FUNCTION	
- 3 Forward Speeds & Motor Off - Manual Reverse - Lights On/Off with Full-Range Dimming	Dark Cherry FB339013 BAP7 Weathered White Wainut FB339013 BAP7
OPTIONAL CONTROLS	Cherry Walnut
WALL TRANSMITTER – LIMITED FUNCTION	FB339013 FB339013 OBB OBB


370039 (Shown)

• • • •



BLADE SPECS

WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 13.25"	B: 12.75"	C: 13.75"	D: 6.75"	



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4889	73	67	



52" Monarch[™] II Patio



Medium Walnut Blades

Weathered White Walnut Blades

Walnut

DBK

Dark

Walnut

FB310103

WCP

Fan Finish

DBK

Distressed

Black


WCP

Weathered

Coppe

WZC

Weathered



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265


Control CoolTouch[™] Transmitter – Limited Function

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Wet Hanging Weight 25.9 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.68 on High RPM 163 on High Energy Star® No

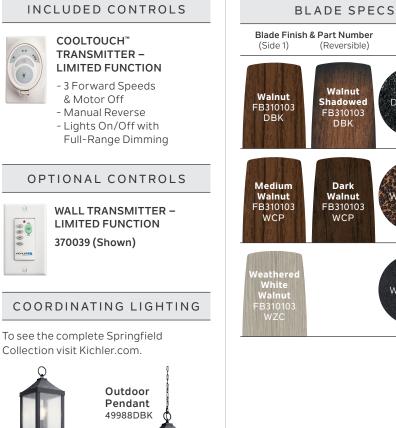


HANGING MEASUREMENTS

	WITH 4" D	OWNROD		
Fixture Drop (from ceiling)				
A: 14.50" B: 12.75" C: 13.75" D: 6.75"				

AIR	PERFORM	ANCE
AIRFLOW	POWER	AIRFLOW

AIRILOW	FOWER	
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
5532	82	68





Outdoor Wall

49986DBK


Outdoor Post

49987DBK



60" Surrey

300250SBK Satin Black Finish Satin Black Blades And the White Blades

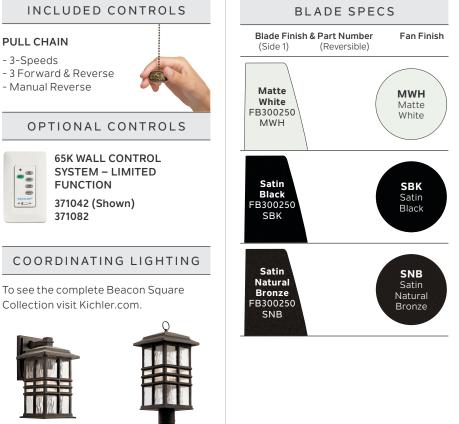

PULL CHAIN

- 3 Forward & Reverse

FUNCTION

371082

371042 (Shown)

- Manual Reverse

- 3-Speeds



Outdoor Wall 49829OZ

Outdoor





Ceiling Light 49834OZ

HANGING MEASUREMENTS

WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Ceiling Canopy (width)			
A: 14.00"	B: 11.50"	C: 9.00"	D: 6.50"	

AIR PERFORMANCE		
AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY

INCLUDED FEATURES

Downrods 4.50" Downrod with 1" (O.D.)

Optional Downlight see pages 266-270

FAN FEATURES

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Mounting Slope – Pitch 30° or 7/12

Blades (4) Included

- Non-reversible

- 13° Pitch

- ABS

- 60" Sweep

Downlight N/A Downlight Glass N/A

Uplight N/A

Lead Wire 78" cETL Listed Wet


Uplight Glass N/A

Low Ceiling Adaptable No **Control** Pull Chain

Hanging Weight 17.6 lbs. Body Material Steel Warranty Limited Lifetime

Amps 0.55 on High RPM 165 on High Energy Star® No

Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
6246	65	96







Shown: 3300020Z Olde Bronze[®] Finish, Etched Cased Opal Glass, with Walnut Blades

52" Vassar LED



330002SBK Satin Black Finish Silver Blades Etched Cased Opal Glass

BLADE SPECS



INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Control – Limited Function

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 17.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC Amps 0.52 on High RPM 182 on High Energy Star® No



INCLUDED CONTROLS

WALL CONTROL -

LIMITED FUNCTION

- 3 Forward Speeds

& Motor Off

COOLTOUCH[™]

TRANSMITTER -

LIMITED FUNCTION

337214TR (Shown)

METAL CAPS

Includes a metal fixture cap for

non-light use.


- Manual Reverse

- Lights On/Off with

Full-Range Dimming

WITH 4" DOWNROD			
Fixture Drop (from ceiling) Blade Drop (from ceiling) Housing (width) Ceiling Canopy (width)			
A: 15.00"	B: 11.00"	C: 8.75"	D: 6.25"

AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
4811	59	81



Shown: 310360WN Walnut Finish, Frosted White Polycarbonate, with Walnut Blades

60" Jace™ LED




310360WH1 White Finish Bamboo Blades Frosted White Polycarbonate

60" Jace[™] LED

WN

Walnut



Blades (3) Included

- 12° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Frosted White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control – Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Damp Hanging Weight 20 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 15mm, AC Amps 0.6 on High RPM 156 on High Energy Star® No

	65K WALL CONTROL – FULL FUNCTION - 3 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full-Range Dimming			
OP	TIONAL CONTROLS			
	65K COOLTOUCH [™] TRANSMITTER – FULL FUNCTION 370006 (Shown)			
METAL CAPS				
Includes a metal fixture cap for non-light use.				

INCLUDED CONTROLS





Blade Finish & Part Number Fan Finish (Reversible) (Side 1) SBK Satin Black FB310360 Satin Black SBK WH White White FB310360 WH WH1 Bamboo White FB310360 WH1

Walnut


FB310360 WN

BLADE SPECS

HANGING MEASUREMENTS

	WITH 6" D	OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	 A B
A: 15.25"	B: 13.00"	C: 9.00"	D: 6.75"	↓↓.⊏

AIR PERFORMANCE			
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY	
Per Minute	Watts on High	Cubic Ft.	
on High	(Excludes	Per Minute	
	Lights)	Per Watt	
5797	72	81	



Shown: 330001BSS Brushed Stainless Steel Finish, Etched Cased Opal Glass, with Silver Blades

54" Geno" LED


330001MWH Matte White Finish Matte White Blades Etched Cased Opal Glass 3300010Z Olde Bronze[®] Finish Cherry Blades

Etched Cased Opal Glass



Silver Blades Etched Cased Opal Glass

54" Geno[™] LED



Blades (5) Included

- 14° Pitch
- 54" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Handheld Control System – Basic

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 24.5 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.67 on High RPM 157 on High Energy Star[®] No



INCLUDED CONTROLS

HANDHELD CONTROL SYSTEM – BASIC - 3 Forward Speeds & Motor Off - Manual Reverse

- Lights On/Off with
- Full-Range Dimming

OPTIONAL CONTROLS






HANGING MEASUREMENTS

WITH 4.50" DOWNROD				
Fixture DropBlade DropHousingCeiling Canopy(from ceiling)(from ceiling)(width)(width)				
A: 14.50"	B: 10.50"	C: 11.00"	D: 6.25"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY	
Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt	
5147	80	65	



Shown: 310017AVI Anvil Iron Finish, Fresnel Lens, with Walnut Blades

60" Hatteras Bay



Cherry Blades Fresnel Lens

Medium Walnut Blades Fresnel Lens

Blades (5) Included

- 12° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 12" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 23W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Fresnel Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Flush Mount Canopy included. *Note: Décor trim must be removed for Flush Mount.*

Control CoolTouch[™] Control System – Full Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Damp Hanging Weight 32.5 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.6 on High RPM 157 on High Energy Star® No

Fixture Drop

(from ceiling)

A: 17.50"

INCLUDED CONTROLS

COOLTOUCH[™]



FULL FUNCTION
- 3 Forward Speeds
& Motor Off

CONTROL SYSTEM -

- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -FULL FUNCTION 370038MULTR (Shown)

COORDINATING LIGHTING

To see the complete Hatteras Bay[™] Collection visit Kichler.com.





WITH 6" DOWNROD Blade Drop Housing (width) (from ceiling) (width) Ceiling Canopy (width) B: 13.00" C: 15.50" D: 6.75"


HANGING MEASUREMENTS

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 12.25"	B: 7.75"	C: 15.50"	D: 6.75"

AIR PERFORMANCE

AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
6282	71	88





AIR PERFORMANCE (FLUSH)				
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW		
Per Minute	Watts on High	Cubic Ft.		
on High	(Excludes	Per Minute		
	Lights)	Per Watt		
5449	71	77		



BLADE SPECS



3100118AVI Anvil Iron Finish, Fresnel Lens Gloss White Inside-Clear Outside, with Walnut Blades

52" Hatteras Bay



310018DBK Distressed Black Finish Cherry Blades Fresnel Lens Gloss White Inside-Clear Outside



310018WZC Weathered Zinc Finish Dark Walnut Blades Fresnel Lens Gloss White Inside-Clear Outside

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 12" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 23W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Fresnel Lens Gloss White Inside-Clear Outside

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included. Note: Décor trim must be removed for Flush Mount.

Control CoolTouch[™] Transmitter – Full Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Damp Hanging Weight 33 lbs.

Body Material Steel, Plywood, Glass Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.69 on High RPM 146 on High Energy Star® No

6124

82

HANGING MEASUREMENTS

WITH 12" DOWNROD						←D→	
	Fixture Drop (from ceiling)			0	Ceiling Canopy (width)	↑ ↑ A B	
	A: 22.50"	B: 18.50"	C: 15.25"		D: 6.75") Se
		FLUS	SH MOUNT				
	Fixture Drop (from ceiling)			0	Ceiling Canopy (width)		
	A: 11.25"	B: 7.25"	C: 15.25"		D: 6.75"		
AIR PERFORMANCE			AIR PER	FORMANC	E (FLUSH)		
	AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt

75

4302

54

INCLUDED CONTROLS

COOLTOUCH[™]



TRANSMITTER -FULL FUNCTION - 3 Forward Speeds & Motor Off

- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS

WALL TRANSMITTER -**FULL FUNCTION** 370038MULTR (Shown)

87



Kichler.com 187

Shown: 3300000Z Olde Bronze[®] Finish, Etched Cased Opal Glass, with Walnut Blades

52" Lucian LED



330000NI Brushed Nickel Finish Walnut Blades Etched Cased Opal Glass



330000PN Polished Nickel Finish Black Blades Etched Cased Opal Glass



Satin Black Finish Silver Blades Etched Cased Opal Glass

52" Lucian[™] LED

Fan Finish

NI

Brushed

Nickel

οz

Olde

Bronze®

PN

Polished

Nickel

BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 3-Speed Wall Control -Limited Function

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 21.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.6 on High RPM 155 on High Energy Star® No

9	- Manual R - Lights On Full-Rang	
0 P 1	FIONAL (CONTRO
	COOLTOU TRANSMIT LIMITED F 337214TR (TER – UNCTION
	METAL	CAPS
Includes a non-light	n metal fixtu use.	re cap for
	D.	

INCLUDED CONTROLS

3-SPEED WALL CONTROL -LIMITED FUNCTION

- 3 Forward Speeds
- & Motor Off
- g

DLS






HANGING MEASUREMENTS

WITH 4" DOWNROD			
Fixture DropBlade DropHousingCeiling Canopy(from ceiling)(from ceiling)(width)(width)			
A: 14.25"	B: 10.25"	C: 7.50"	D: 6.00"

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5356	72	75		










60" Kevlar™





Blades (5) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Wet Hanging Weight 26.2 lbs. Body Material Aluminum Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.63 on High RPM 142 on High Energy Star® No

•	
KICHLER*	
# 💭 N	

PULL CHAIN

- 3 Forward & Reverse

- Manual Reverse

- 3-Speeds

65K WALL CONTROL SYSTEM – LIMITED FUNCTION 371042 (Shown)

OPTIONAL CONTROLS


INCLUDED CONTROLS

371082



HANGING MEASUREMENTS

WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 13.75"	B: 11.50"	C: 13.00"	D: 6.75"	



AIR PERFORMANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
6136	75	82





42" Kevlar





Blades (5) Included

- 14° Pitch
- 42" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 17.9 lbs. Body Material Aluminum Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 18mm, AC Amps 0.4 on High RPM 231 on High Energy Star[®] No



- 3 Forward & Reverse

- Manual Reverse


OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM – LIMITED FUNCTION 371042 (Shown) 371082



HANGING MEASUREMENTS

WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 13.75"	B: 11.50"	C: 13.00"	D: 6.75"	



AIR PERFORMANCE

AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
3535	48	74





60" Kimberley



Berkshire Bronze[®] Finish Dark Cherry Blades Umber Etched Marble Glass

Fan Finish

BAB

Burnished Antique Brass

BKZ

Berkshire Bronze

BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)

Dark

Cherry FB300208

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Includes(3) 4W LED Lamp

Downlight Glass Umber Etched Marble Glass

Optional Downlight N/A Uplight Includes (4) 4W, E12, LED Lamp Uplight Glass N/A

Low Ceiling Adaptable No

Control CoolTouch[™] Transmitter – **Full Function**

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 34.2 lbs. Body Material Poly Resin Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.72 on High RPM 154 on High Energy Star® No

INCLUDED CONTROLS

COOLTOUCH[™]

TRANSMITTER -



FULL FUNCTION - 3 Forward Speeds & Motor Off - Lights On/Off with

Full-Range Dimming

OPTIONAL CONTROLS



To see the complete Camerena™ Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 19.50"	B: 12.00"	C: 15.25"	D: 5.50"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6179 85 73			




Walnut FB300208 BAB

370038MULTR (Shown)

BKZ COORDINATING LIGHTING



Α В

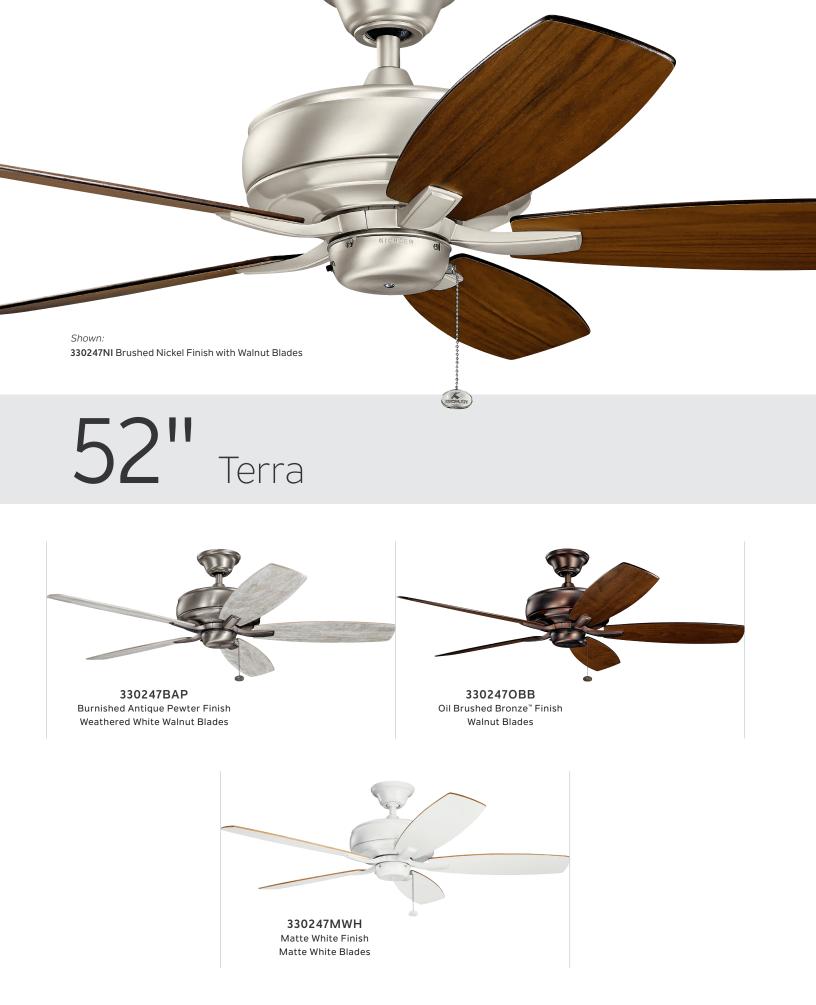



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control Pull Chain

FAN FEATURES


Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 20.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC Amps 0.6 on High RPM 161 on High Energy Star® No

HANGING MEASUREMENTS

WITH 4.50" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 12.50"	C: 12.50"	D: 6.75"



INCLUDED CONTROLS

OPTIONAL CONTROLS

65K WALL CONTROL

SYSTEM - LIMITED

FUNCTION

337001

371082

371042 (Shown)

PULL CHAIN


- 3 Forward & Reverse

- Manual Reverse

- 3-Speeds

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High USAGE Watts on High (Excludes Lights) AIRFLOW EFFICIENCY Cubic Ft. Per Minute Lights) Per Watt			
4593	71	65	



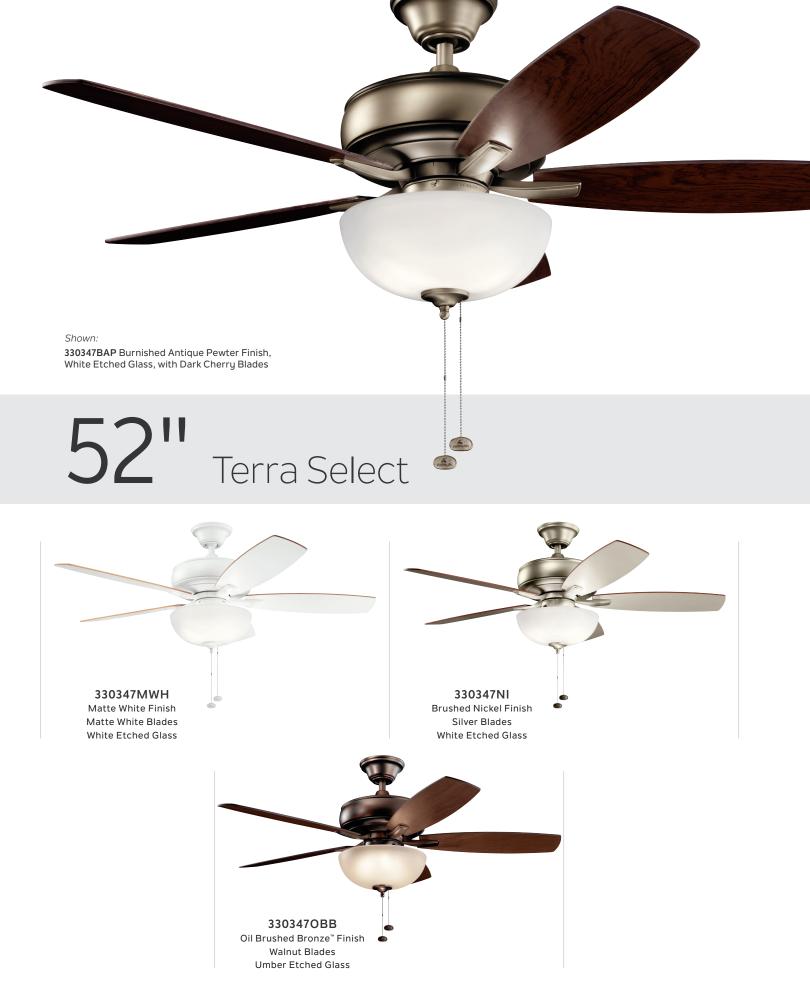

52" Terra Select



INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) 4W LED Platform, 80 CRI, 2700K

Downlight Glass White Etched Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 19.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC Amps 0.56 on High RPM 154 on High Energy Star® No

HANGING	MEASUREMENTS

WITH 4.50" DOWNROD			
Fixture Drop (from ceiling)Blade Drop (from ceiling)Housing (width)Ceiling Canopy (width)			
A: 20.75"	B: 12.50"	C: 12.50"	D: 6.75"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4972	66	75	



À B

INCLUDED CONTROLS

OPTIONAL CONTROLS

65K WALL CONTROL

371042MUL (Shown)

SYSTEM - LIMITED

FUNCTION

371082WH

PULL CHAIN

- 3 Forward & Reverse

- Manual Reverse

- 3 Speeds

0 Shown: 330243NI Brushed Nickel Finish with Walnut Blades SI-STELER 60" Bowen

> 330243MWH Matte White Finish Matte White Blades

3302430Z Olde Bronze® Finish Cherry Blades

Fan Finish

MWH

Matte

White

NI


Brushed

Nickel


οz

Olde

Bronze

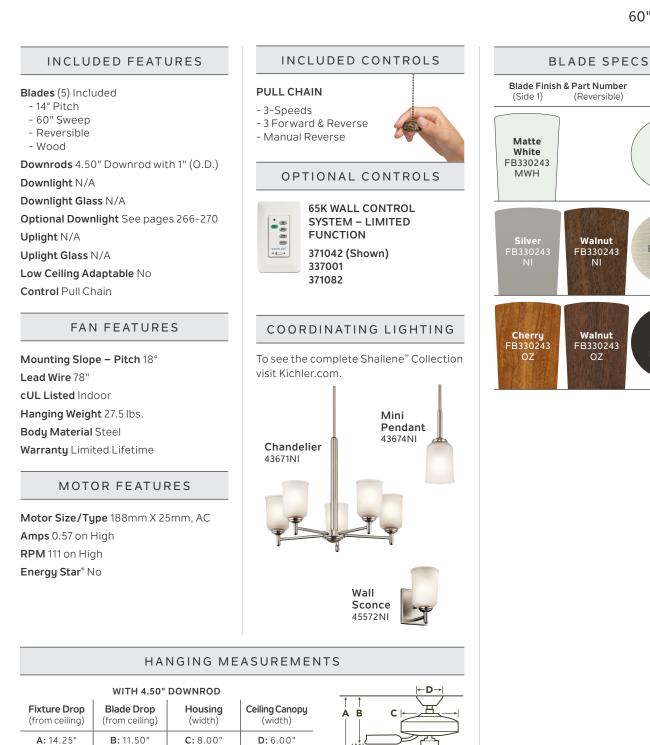

AIR PERFORMANCE			
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW	
Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt	
5190	67	78	

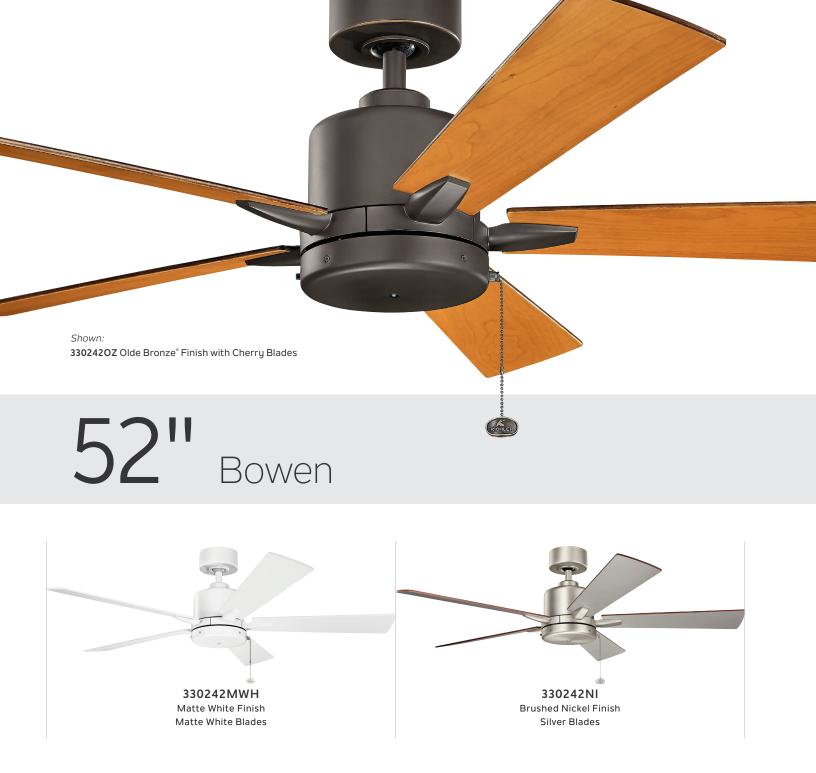

Fan Finish

MWH

Matte

White

NI


Brushed

Nickel

οz

Olde


Bronze

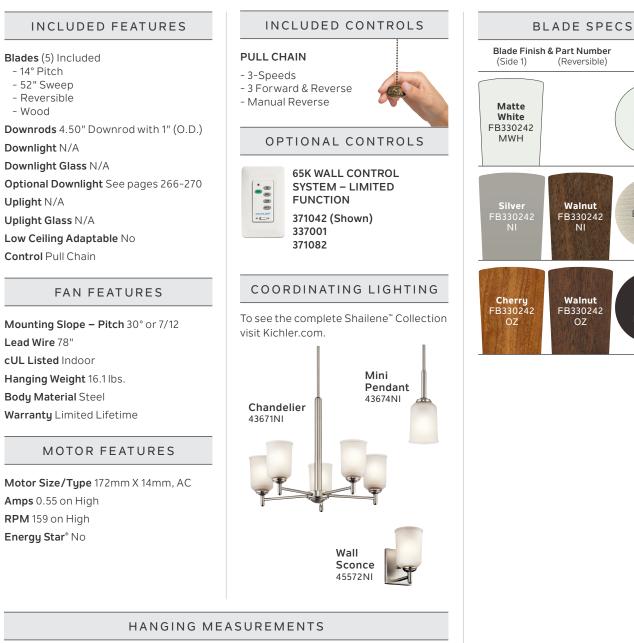

WITH 4.50" DOWNROD Fixture Drop Blade Drop Housing Ceiling Canopy (from ceiling) (from ceiling) (width) (width)

C: 8.00"

D: 6.00"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4411	67	66	

B: 11.00"

A: 13.75"





Blades (5) Included - 14° Pitch - 42" Sweep - Non-reversible - Wood Downrods 4.50" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 266-270 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 14.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.41 on High RPM 199 on High Energy Star® No



PULL CHAIN

- 3 Forward & Reverse


- Manual Reverse

- 3-Speeds

HANGING MEASUREMENTS

WITH 4.50" DOWNROD			
Fixture Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 13.75"	B: 11.00"	C: 8.00"	D: 6.00"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3402	48	70	








60" Canfield[™] XL



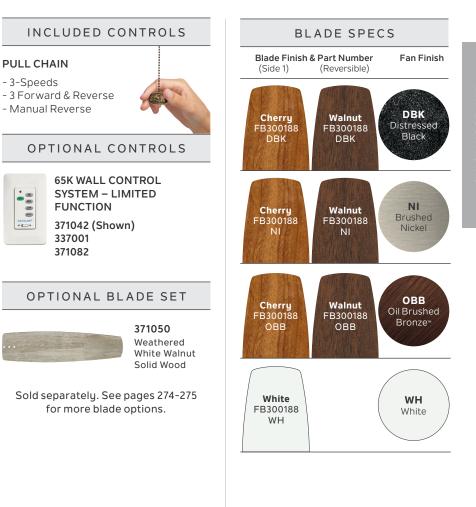

HANGING MEASUREMENTS

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Ceiling Canopy (width)		
A: 14.00"	B: 11.25"	C: 13.75"	D: 6.25"

	←D→
↑ ↑ A B	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6785	83	82	

INCLUDED FEATURES

Downrods 4" Downrod with 1" (O.D.)

Optional Downlight See pages 266-270

Low Ceiling Adaptable Yes, with Optional

Flush Mount Accessory 337008 on page

FAN FEATURES

MOTOR FEATURES

Motor Size/Type 212mm X 25mm, AC

Blades (5) Included

- 14° Pitch

- 60" Sweep

- Reversible

Downlight N/A Downlight Glass N/A

Uplight N/A

265

Uplight Glass N/A

Control Pull Chain

Lead Wire 78" cETL Listed Indoor

Mounting Slope – Pitch 18°

Hanging Weight 27.8 lbs.

Body Material Steel Warranty Limited Lifetime

Amps 0.7 on High RPM 148 on High Energy Star® No

- Wood



$60^{\prime\prime} \;\; \text{Canfield}^{^{\prime\prime}} \; \text{XL Patio}$



Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 29.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 212mm X 25mm, AC Amps 0.68 on High RPM 167 on High Energy Star® No



OPTIONAL CONTROLS


- 3-Speeds

65K WALL CONTROL SYSTEM – LIMITED FUNCTION 371042 (Shown) 371082



HANGING MEASUREMENTS

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Ceiling Canopy (width)		
A: 14.00"	B: 11.25"	C: 13.75"	D: 6.25"



AIR PERFORMANCE

AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
6678	81	82





330013NI Brushed Nickel Finish, Satin Etched Glass, with Walnut Blades

52" Canfield Pro LED



Matte White Blades Satin Etched Glass

Walnut Blades Satin Etched Glass

Fan Finish

BLADE SPECS

Blade Finish & Part Number



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (1) 17 Dimmable, 1600 Lumens LED Platform 80 CRI, 3000K

Downlight Glass Satin Etched Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optio Flush Mount Accessory 337008 on pa 265

Control Wall Control - Limited Function

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 23.6 lbs. Body Material Steel Warranty Limited Lifetime


MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.55 on High RPM 157 on High Energy Star® No

with 1" (O.D.) . Includes (1) 17W s LED Platform,	& Motor Off - Manual Reverse - Lights On/Off with Full-Range Dimming
tched Glass	OPTIONAL CONTROLS
Yes, with Optional 337008 on page	COOLTOUCH" TRANSMITTER – LIMITED FUNCTION 337214TR (Shown)
imited Function	
URES	OPTIONAL BLADE SETS
18°	371030 Weathered Whit Walnut Solid Wood
5.	371031 Shadowed Waln Solid Wood
me	Sold separately. See pages 274-275
TURES	for more blade options.
m X 20mm, AC	
HANGING ME	ASUREMENTS

WITH 4" DOWNROD			
Fixture Drop (from ceiling)Blade Drop (from ceiling)Housing (width)Ceiling Canopy (width)			
A: 17.25" B: 11.00"		C: 12.50"	D: 6.25"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4966	66	76	



INCLUDED CONTROLS

WALL CONTROL-LIMITED FUNCTION

- 3 Forward Speeds

LS

TS

d White bd


d Walnut bd

(Side 1) (Reversible) leathered Matte ммн White Walnut B33001 MWH White Matte FB330013 White MWH NI Cherry FB330013 Walnut Brushed FB330013 Nickel NI OBB Cherry FB330013 Walnut **Oil Brushed** FB330013 Bronze™ OBB OBB

Shown: 3000260BB Oil Brushed Bronze[®] Finish, Cased Opal Glass, with Cherry Blades

52" Canfield[™] Select LED





Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Dimmable, 1600 Lumens, 80CRI, 3000K

Downlight Glass Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No


Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 18.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.49 on High RPM 159 on High Energy Star[®] No



INCLUDED CONTROLS

PULL CHAIN

- 3 Forward & Reverse


- 3-Speeds

Sold separately. See pages 274-275 for more blade options.

HANGING MEASUREMENTS

WITH 4" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 17.00"	B: 10.50"	C: 11.00"	D: 6.25"		

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5036	58	86		







52" Canfield[™]



PULL CHAIN Blades (5) Included - 3-Speeds - 3 Forward & Reverse - Manual Reverse **Downrods** 4" Downrod with 1" (O.D.) OPTIONAL CONTROLS Downlight Glass N/A 65K WALL CONTROL Optional Downlight See pages 266-270 SYSTEM - LIMITED FUNCTION 371042 (Shown) Uplight Glass N/A 337001 Low Ceiling Adaptable Yes, with Optional 371082 Flush Mount Accessory 337008 on page Control Pull Chain OPTIONAL BLADE SETS 371030 FAN FEATURES Weathered White Walnut Mounting Slope – Pitch 18° Solid Wood 371031 cUL Listed Indoor Walnut Shadowed Solid Wood Hanging Weight 19.7 lbs. Body Material Steel Sold separately. See pages 274-275 Warranty Limited Lifetime for more blade options. MOTOR FEATURES Motor Size/Type 172mm X 20mm, AC Amps 0.54 on High HANGING MEASUREMENTS

WITH 4" DOV			ITH 4" DOWNROD				
	Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	ļ	AB	
	A: 13.50"	B: 10.75"	C: 12.50"	D: 6.25"		ļ	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
4868	66	74		

INCLUDED FEATURES

- 14° Pitch

- 52" Sweep

- Reversible

Downlight N/A

Uplight N/A

Lead Wire 78"

RPM 155 on High Energy Star® No

265

- Wood



320500CMO Coffee Mocha Finish with Coffe Mocha Blades with 370035 Ivory with Walnut Highlights All-Weather ABS Blades

52"/54"/56" Canfield Motor Assembly



320500ANS Antique Silver Finish 370022ANS Dark Weather All-Weather ABS Blades (Blades Sold Separately)




320500ANS Antique Silver Finish 371010ANS Antique Satin Silver ABS Blades (Blades Sold Separately)




320500SNW Satin Natural White Finish 371013SNW Satin Natural White All-Weather ABS Blades 380910 SNW Light Kit (Blades & Light Kit Sold Separately)



52"/54"/56" Canfield[™] Motor Assembly

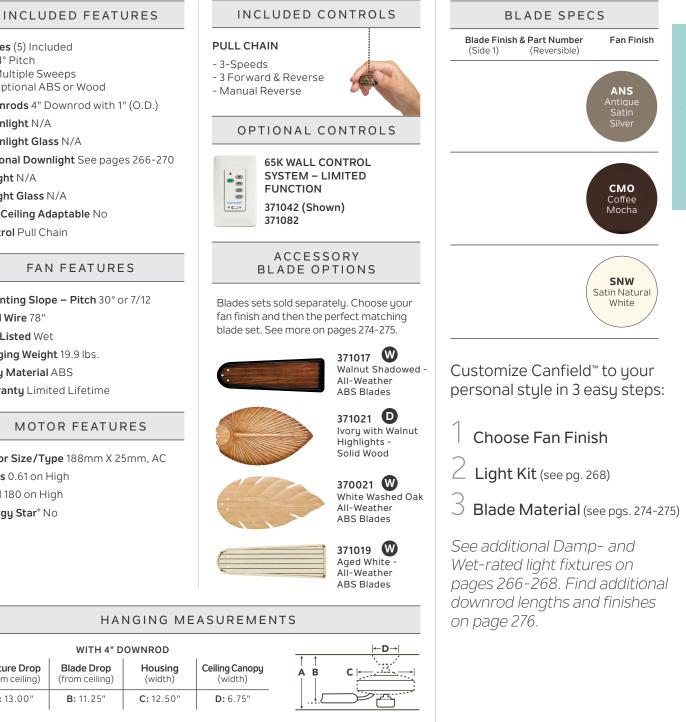

- 14 Pitch - Multiple Sweeps - Optional ABS or Wood Downrods 4" Downrod with 1" (O.D.)	- 3-Speeds - 3 Forward & Reverse - Manual Reverse		Al Ant Sa
Downlight N/A Downlight Glass N/A	OPTIONAL CO	ONTROLS	Sil
Optional Downlight See pages 266-270 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control Pull Chain	65K WALL CO SYSTEM – LI FUNCTION 371042 (Show 371082	MITED	CN Co Mo
FAN FEATURES	ACCESS BLADE OP		SI
Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet	Blades sets sold separat fan finish and then the p blade set. See more on p	erfect matching	Satin
Hanging Weight 19.9 lbs. Body Material ABS Warranty Limited Lifetime	•	371017 W Walnut Shadowed - All-Weather ABS Blades	Customize Canfield™ to personal style in 3 easy
MOTOR FEATURES Motor Size/Type 188mm X 25mm, AC		371021 D Ivory with Walnut Highlights - Solid Wood	1 Choose Fan Finish
Amps 0.61 on High RPM 180 on High Energy Star [®] No		370021 W White Washed Oak All-Weather ABS Blades	2 Light Kit (see pg. 268) 3 Blade Material (see pg
		371019 W Aged White - All-Weather ABS Blades	See additional Damp- ar Wet-rated light fixtures of pages 266-268. Find add downrod lengths and fin
HANGING ME	ASUREMENTS		on page 276.
WITH 4" DOWNROD Fixture Drop Blade Drop Housing (from ceiling) (width)	Ceiling Canopy A B (width)	←D→ C <u>←</u>	



Lights)

73

Per Watt

86

Blades (5) Included

A: 13.00"


6231


- 14° Pitch





52" Canfield $^{\circ}$ Patio

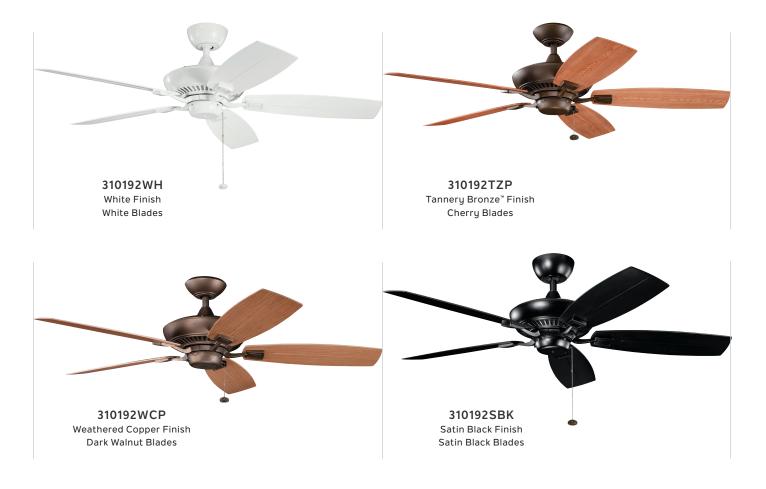

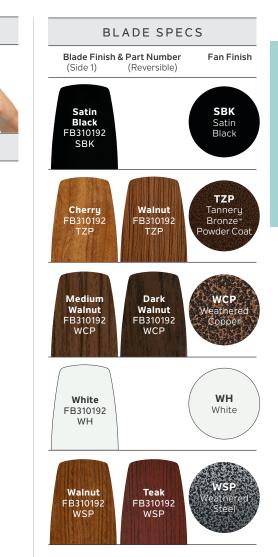

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Wet Hanging Weight 24.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.59 on High RPM 185 on High Energy Star[®] No

INCLUDED CONTROLS

OPTIONAL CONTROLS

65K WALL CONTROL

SYSTEM - LIMITED

FUNCTION

371082

371042 (Shown)

PULL CHAIN

- 3 Forward & Reverse

- Manual Reverse

- 3-Speeds

HANGING MEASUREMENTS

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 13.25"	B: 11.00"	C: 12.50"	D: 6.25"

←D→

AIR	PERFORM	ANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
5481	71	78







Blades (5) Included

- 16° Pitch
- 44" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 18.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.53 on High RPM 204 on High Energy Star® No



PULL CHAIN


65K WALL CONTROL SYSTEM - LIMITED 371042 (Shown)

INCLUDED CONTROLS


BLADE SPECS

HANGING MEASUREMENTS

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 12.00"	C: 11.00"	D: 5.50"



AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
4230	61	69

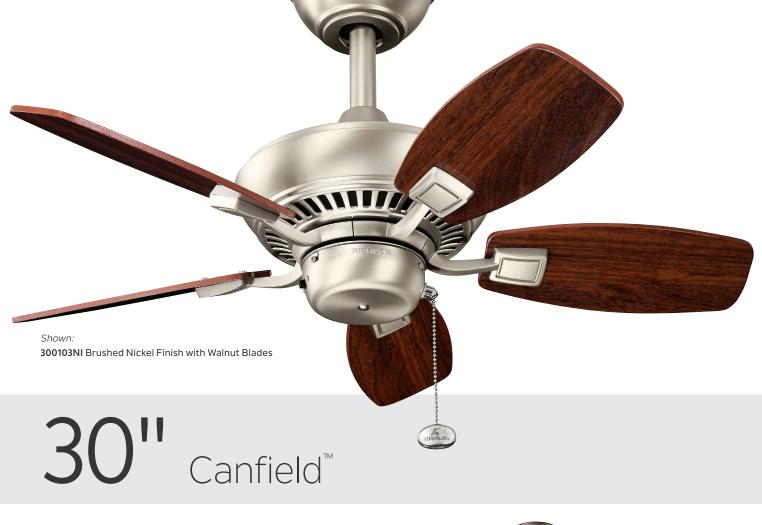





30" Canfield[™]



INCLUDED FEATURES

Blades (5) Included

- 24° Pitch
- 30" Sweep
- Reversible
- UV Coated Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Damp Hanging Weight 14.8 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC Amps 0.33 on High RPM 232 on High Energy Star® No

INC	CLUDED CO	NTROLS
PULL CH	AIN	
- 3-Spee - 3 Forwa - Manual	ard & Reverse	
OP	TIONAL CO	NTROLS
	65K WALL CON SYSTEM – LIN FUNCTION 371042 (Shown 337001 371082	ITED

HANGING MEASUREMENTS

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.00"	B: 12.75"	C: 9.75"	D: 6.00"
FLUSH MOUNT			

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 8.75"	B: 6.50"	C: 9.75"	D: 6.00"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
2439	40	61	

	←D→
↑ ↑ A B	C ⊨ –



AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
1491	40	37	

Shown: 339501AP Antique Pewter Finish, Satin Etched Glass, with Light Cherry Blades

52" Sutter Place[®] Select

339501MWH Matte White Finish Matte White Blades White Alabaster Glass **339501OZ** Olde Bronze[®] Finish Walnut Blades Umber Etched Glass





Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrods with 1" (O.D.)

Downlight Replaceable. (3) E12, 4W, B10 LED Lamps, 2700K

Downlight Glass Satin Etched, White Alabaster, Umber Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Indoor 18.6 lbs. Hanging Weight 18.6 lbs. Body Material Steel, Plywood, Glass Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.42 on High RPM 152 on High Energy Star® No

(KOM)
HICHLER'


INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082

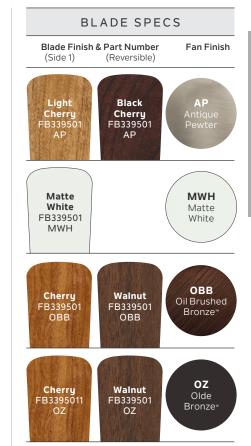

HANGING MEASUREMENTS

WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 18.00"	B: 10.75"	C: 12.00"	D: 5.75"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.25"	B: 8.00"	C: 12.00"	D: 5.25"

AIR PERFORMANCE AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY Per Minute Watts on High Cubic Ft. on High Per Minute (Excludes Per Watt Lights) 3915 48 82

	←D→
↑ B	C ⊨ ⊟ →

AIR PERFORMANCE (FLUSH)				
AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY				
Per Minute	Per Minute Watts on High Cubic Ft.			
on High	(Excludes	Per Minute		
Lights) Per Watt				
3615	47	76		

Α

Shown: 330010NI Brushed Nickel Finish with Nickel Blades

60" Motu™



Gà

G

The Motu[™] fan blades must be mounted a minimum of 10' from the floor.

Blades (3) Included - 35° Pitch - 60" Sweep - Non-reversible - ABS Downrods 6" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight N/A Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control 4-Speed Fan Slide Control

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 24 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.86 on High RPM 261 on High Energy Star® No

INCLUDED CONTROLS

4-SPEED FAN SLIDE CONTROL

- 4-Speed Fan Control
- Faceplate Included
- Controls One Fan
 For Use with Most Ceiling Fans

OPTIONAL CONTROLS




4-SPEED WALL CONTROL – ROTARY 370040 (Shown) 370032

BLADE SPECS Blade Finish & Part Number Fan Finish (Reversible) (Side 1) NI Nickel Brushed FB330010 Nickel NI Satin SBK Black Satin Black FB330010 SBK


HANGING MEASUREMENTS

WITH 6" DOWNROD			
Fixture Drop (from ceiling)Blade Drop (from ceiling)Housing (width)Ceiling Canop (width)			
A: 14.50"	B: 14.50"	C: 8.75"	D: 5.75"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
10253 100 103			



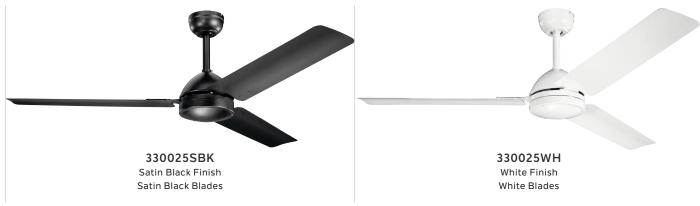

The Todo[™] fan blades must be mounted a minimum of 10' from the floor.

Blades (3) Included - 6.5° Pitch - 56" Sweep - Non-reversible - Steel Downrods 8" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight N/A Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control 4-Speed Wall Slide Control

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 18.3 lbs. Body Material Steel Warranty Limited Lifetime


MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.79 on High RPM 267 on High Energy Star® No

INCLUDED CONTROLS		
٤Ì	4-SPEED FAN SLIDE CONTROL	_
4 3 2 1 1 2	 4-Speed Fan Control Faceplate Included Controls One Fan For Use with Most Ceiling Fans 	
OPTIONAL CONTROLS		
	4-SPEED WALL	




CONTROL - ROTARY 370040 (Shown) 370032



HANGING MEASUREMENTS

WITH 8" DOWNROD			
Fixture Drop (from ceiling)Blade Drop (from ceiling)Housing (width)Ceiling Canopy (width)			
A: 15.00"	B: 12.25"	C: 7.50"	D: 5.25"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
8666 91 95			





339224SNB Satin Natural Bronze Finish Satin Natural Bronze Blades



Blades (3) Included

- 10° Pitch
- 24" Sweep
- Non-reversible
- Steel

Downrods N/A

Downlight N/A Downlight Glass N/A Optional Downlight N/A Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire cUL Listed Wet Hanging Weight 37.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type PSC139-640, AC Amps 2.65 on High RPM 0 on High Energy Star® No




PULL CHAIN

- 3-Speeds - Oscillating





HANGING MEASUREMENTS



Overall Fan Dimensions



Wall Bracket Dimensions Mounting Bracket

8.6

1.87"



18'' Pola[™]



Blades (3) Included

- 10° Pitch
- 18" Sweep
- Non-reversible
- Steel

Downrods N/A

Downlight N/A Downlight Glass N/A Optional Downlight N/A Uplight N/A Uplight Glass N/A

Low Ceiling Adaptable No


Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire cUL Listed Wet Hanging Weight 25.4 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES


Motor Size/Type PSC127-625C, AC Amps 2 on High RPM 0 on High Energy Star® No




PULL CHAIN

- 3-Speeds
- Oscillating





HANGING MEASUREMENTS



Overall Fan Dimensions



Wall Bracket Dimensions

Mounting Bracket

8.6

1.87"

Shown: 330152MWH Matte White Finish, Etched Cased Opal Glass, with Matte White Blades

54" sola


330152NI Brushed Nickel Finish Silver Blades Etched Cased Opal Glass 330152OZ Olde Bronze[®] Finish Brown Blades Etched Cased Opal Glass



330152SBK Satin Black Finish Silver Blades Etched Cased Opal Glass

330152OZ Olde Bronze[®] Finish Brown Blades Etched Cased Opal Glass

3370330Z Optional Downrod Kit (Sold Separately)



Blades (3) Included

- 14° Pitch
- 54" Sweep
- Non-reversible
- ABS

Downrods Optional 337033 Downrod Kit

Downlight Replaceable. Includes (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount **Control** Wall Transmitter – Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 78" cETL Listed Wet Hanging Weight 18.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.59 on High RPM 125 on High Energy Star® No



COOLTOUCH[™] TRANSMITTER -FULL FUNCTION

INCLUDED CONTROLS

METAL CAPS

Includes a metal fixture cap for non-light use.



OPTIONAL HANGER SYSTEM



Downrod Kit 337033 MWH, NI, OZ (shown), SBK

D

HANGING MEASUREMENTS

FLUSH MOUNT				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 11.00"	B: 7.25"	C: 8.75"	D: 6.50"	

OPTIONAL HANGER SYSTEM

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.00"	B: 11.25"	C: 8.75"	D: 6.75"

AIR PERFORMANCE AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5096 70 73



AIR PERFORMANCE (OPT.)				
AIRFLOW Cubic Ft. Per Minute on High USAGE Watts on High (Excludes Lights) Per Watt				
5754	70	91		


В



Shown: 330151NI Brushed Nickel Finish, Etched Cased Opal Glass, with Silver Blades







Blades (3) Included

- 17° Pitch
- 44" Sweep
- Non-reversible
- ABS

Downrods Optional 337033 Downrod Kit

Downlight Replaceable. Includes (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount **Control** Wall Transmitter – Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 78" cETL Listed Wet Hanging Weight 15.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 172mm X 15mm, AC Amps 0.57 on High RPM 170 on High Energy Star® No

4298

68



WALL TRANSMITTER -FULL FUNCTION - 3 Forward Speeds

- & Motor Off
- Lights On/Off with Full-Range Dimming


OPTIONAL CONTROLS



TRANSMITTER -**FULL FUNCTION** 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



OPTIONAL HANGER SYSTEM



Downrod Kit 337033 MWH NI (shown), OZ, SBK


HANGING MEASUREMENTS FLUSH MOUNT D Blade Drop **Fixture Drop** Housing Ceiling Canopy В (from ceiling) (from ceiling) (width) (width) A: 11.00" D: 6.50" B: 7.25" C: 8.75" **OPTIONAL HANGER SYSTEM Fixture Drop** Blade Drop Housing **Ceiling Canopy** (from ceiling) (from ceiling) (width) (width) A: 15.00" B: 11.25" C: 8.75" D: 6.75" AIR PERFORMANCE AIR PERFORMANCE (OPT.) AIRFLOW POWER AIRFLOW AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY Cubic Ft. USAGE EFFICIENCY Per Minute Per Minute Cubic Ft. Watts on High Cubic Ft. Watts on High Per Minute Per Minute on High (Excludes on High (Excludes Per Watt Per Watt Lights) Lights)

63

4705

68

77

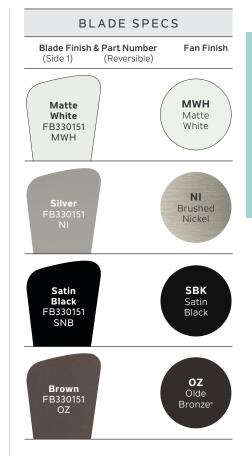

Shown: 3301500Z Olde Bronze® Finish, Etched Cased Opal Glass, with Brown Blades







Blades (3) Included

- 14° Pitch
- 54" Sweep
- Non-reversible
- ABS

Downrods Optional 337033 Downrod Kit

Downlight Replaceable. Includes (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount **Control** Wall Transmitter – Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 78" cETL Listed Wet Hanging Weight 18.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.59 on High RPM 125 on High Energy Star® No



FULL FUNCTION - 3 Forward Speeds - Lights On/Off with

Full-Range Dimming


OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



OPTIONAL HANGER SYSTEM



NI, OZ (shown), MWH, SBK

FLUSH MOUNT Fixture Drop Blade Drop Housing Ceiling Canopy (width) (from ceiling) (from ceiling) (width) D: 6.50" A: 11.00" B: 7.25" C: 8.75"


HANGING MEASUREMENTS

OPTIONAL HANGER SYSTEM

Fixture Drop (from ceiling)	Blade Drop	Housing	Ceiling Canopy
	(from ceiling)	(width)	(width)
A: 15.00"	B: 11.25"	C: 8.75"	D: 6.75"


AIR PERFORMANCE AIRFLOW POWER AIRFLOW

Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
3509	65	54






AIR PERFORMANCE (OPT.)				
AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY				
Per Minute Watts on High Cubic Ft.				
on High	(Excludes	Per Minute		
	Lights)	Per Watt		
3831	65	65		

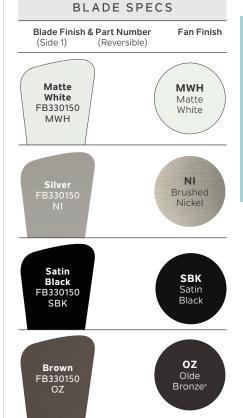



330180NBR Natural Brass Finish, Etched Cased Opal Glass, with Medium Cherry Blades

60" Starkk

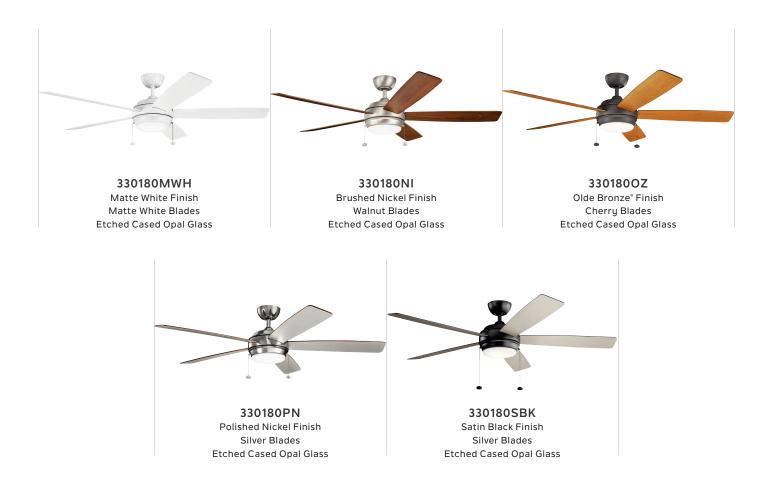



Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 21.4 lbs. Body Material Steel Warranty Limited Lifetime


MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.6 on High RPM 113 on High Energy Star® No

WITH 4.50" DOWNROD				_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	,
A: 14.25"	B: 9.75"	C: 10.50"	D: 6.25"	_

HANGING MEASUREMENTS

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High USAGE (Excludes Lights) AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Minute			
5476	72	76	



INCLUDED CONTROLS

OPTIONAL CONTROLS

65K WALL CONTROL

371042MUL (Shown)

SYSTEM - LIMITED

FUNCTION

371082WH

PULL CHAIN

- 3 Forward & Reverse

- Manual Reverse

- 3 Speeds





52" Starkk





INCLUDED CONTROLS

OPTIONAL CONTROLS

65K WALL CONTROL

371042MUL (Shown)

SYSTEM - LIMITED

FUNCTION

371082WH

PULL CHAIN

- 3 Forward & Reverse

- Manual Reverse

- 3 Speeds

C

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 16.4 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC Amps 0.46 on High RPM 135 on High Energy Star® No

WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.25"	B: 9.75"	C: 10.50"	D: 6.25"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4051	54	75	



Α В





Blades (5) Included

- 12° Pitch
- 42" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 26.4 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 12mm, AC Amps 0.39 on High RPM 215 on High Energy Star® No

WITH 4.50" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.25"	B: 9.75"	C: 10.50"	D: 6.25"	

HANGING MEASUREMENTS

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3482	47	74	



D В C

Α

INCLUDED CONTROLS

OPTIONAL CONTROLS

FUNCTION

371082WH

65K WALL CONTROL SYSTEM - LIMITED

371042MUL (Shown)

PULL CHAIN

- 3 Forward & Reverse

- Manual Reverse

- 3 Speeds




Shown: 330015SBK Satin Black Finish with Satin Black Blades

52" Basics Pro Patio

330015MWH Matte White Finish Matte White Blades 330015SNB Satin Natural Bronze Finish Walnut Blades



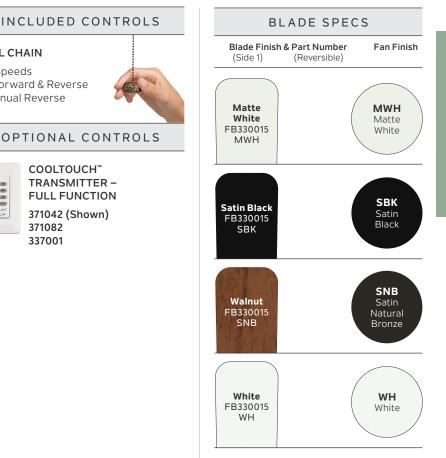

INCLUDED FEATURES PULL CHAIN Blades (5) Included - 12° Pitch - 3-Speeds - 52" Sweep - 3 Forward & Reverse - Non-reversible - Manual Reverse - ABS Downrods 4" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 266-270 Uplight Glass N/A Low Ceiling Adaptable Yes, Dual Mount P Da Included Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Damp Hanging Weight 17.9 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.43 on High RPM 167 on High Energy Star® No

		OWNROD	WITH 4" D	
↑ ↑ A B 	Ceiling Canopy (width)	Housing (width)	Blade Drop (from ceiling)	Fixture Drop (from ceiling)
J	D: 5.25"	C: 11.50"	B: 10.50"	A: 12.50"
		MOUNT	FLUSH	
	Ceiling Canopy (width)	Housing (width)	Blade Drop (from ceiling)	Fixture Drop (from ceiling)
	D: 5.25"	C: 11.50"	B: 7.50"	A: 9.50"
FORMANC	AIR PER	NCE	ERFORMA	AIR P

HANGING MEASUREMENTS

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4367	52	84	

	←D→
↑ B	C



371082

337001

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3853	52	74	



Shown: 330016MWH Matte White Finish, White Etched Glass, with Matte White Blades

52" Basics Pro Premier LED



330016NIS Brushed Nickel Finish Walnut Blades Clear Seeded Glass **330016SBK** Satin Black Finish Satin Black Blades White Etched Glass



330016SBKS Satin Black Finish Satin Black Blades Clear Seeded Glass



330016SNB Satin Natural Bronze Finish Walnut Blades White Etched Glass 330016WH White Finish White Blades White Etched Glass



Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (4) E26, 4W LED Bulbs

Downlight Glass White Etched Glass or Clear Seeded Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included


Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 18.2 lbs. Body Material Steel Warranty Visit Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Tupe 153mm X 15mm, AC Amps 0.43 on High RPM 161 on High Energy Star® No

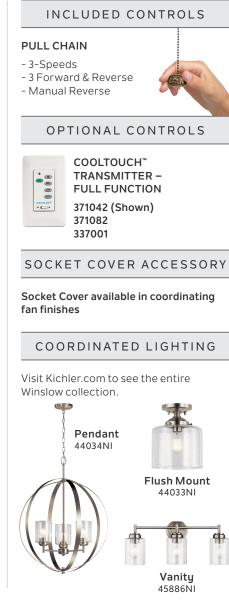

HANGING MEASUREMENTS

Fixture Drop (from ceiling)	WITH 4" D Blade Drop (from ceiling)	OWNROD Housing (width)	Ceiling Canopy (width)	$ \begin{array}{c c} \leftarrow \mathbf{D} \rightarrow \\ \hline \uparrow \uparrow \\ \mathbf{A} \mathbf{B} \\ \\ \end{array} $
A: 18.25"	B: 10.50"	C: 11.50"	D: 5.25"	
	FLUSH	MOUNT		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	LED
A: 15.25"	B: 7.50"	C: 11.50"	D: 5.25"	\bigcirc


AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4200 52 81			

AIR PERFORMANCE (FLUSH)			
AIRFLOW	POWER	AIRFLOW	
Per Minute	Watts on High	Cubic Ft.	
on High	(Excludes Lights)	Per Minute Per Watt	
3705	52	72	

nut	Silver	NIS
0016	FB330016	Brushed
IS	NIS	Nickel
Black	Silver	SBK
0016	FB330016	Satin
3K	SBK	Black
Black	Silver	SBKS
0016	FB330016	Satin
KS	SBKS	Black
nut 0016 NB	Cherry FB330016 SNB	SNB Satin Natural Bronze
l ite 0016 H	Silver FB330016 WH	WH White

Shown: 330017MWH Matte White Finish, White Etched Glass, with Matte White Blade

52" Basics Pro Select LED

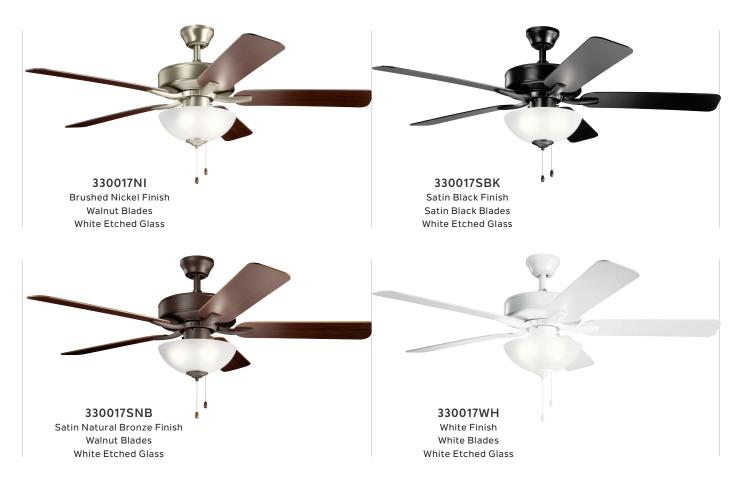





- 12° Pitch

- 52" Sweep
- Reversible
- Reveisi
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) B10, 4W LED Bulbs

Downlight Glass White Etched Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 15.1 lbs. Body Material Steel Warranty Visit Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.43 on High RPM 161 on High Energy Star® No

- 3-Speeds - 3 Forwar - Manual F	d & Reverse
OPT	IONAL CONTROLS
	COOLTOUCH [™] TRANSMITTER – FULL FUNCTION 371042 (Shown) 371082 337001
COOR	DINATED LIGHTING
Abbotswe	er.com to see the entire II [®] collection. Pendant 43495BK

INCLUDED CONTROLS

Linear Chandelier 43494BK

HANGING MEASUREMENTS

ixture Drop from ceiling)	WITH 4" D Blade Drop (from ceiling)	OWNROD Housing (width)	Ceiling Canopy (width)	
A: 17.50"	B: 10.50" FLUSH	C: 11.50" MOUNT	D: 5.25"	
fixture Drop from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	LED
A: 14.50"	B: 7.50"	C: 11.50"	D: 5.25"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4200 52 81			

AIR PERFORMANCE (FLUSH)		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3705	52	72





52" Basics Pro



INCLUDED FEATURES PULL CHAIN Blades (5) Included - 12° Pitch - 3-Speeds - 52" Sweep - 3 Forward & Reverse - Reversible - Manual Reverse - Wood Downrods 4" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 266-270 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable Yes, Dual Mount Included Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 13.1 lbs. Body Material Steel Warranty Visit Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.43 on High RPM 161 on High Energy Star® No

WITH 4" DOWNROD				
Fixture Drop (from ceiling)Blade Drop(from ceiling)		Housing (width)	Ceiling Canopy (width)	
A: 12.50"	B: 10.50"	C: 11.50"	D: 5.25"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 9.25"	B: 7.50"	C: 11.50"	D: 5.25"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High			
4200	Lights) 52	Per Watt 81	

AIR PERFORMANCE (FLUSH)				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
3705	52	72		

Α В

INCLUDED CONTROLS

OPTIONAL CONTROLS

COOLTOUCH[™]

TRANSMITTER -

FULL FUNCTION

371042 (Shown)

371082


337001




Shown: 330019MWH Matte White Finish, Frosted White Polycarbonate, with Matte White Blades

52" Basics Pro Designer

2

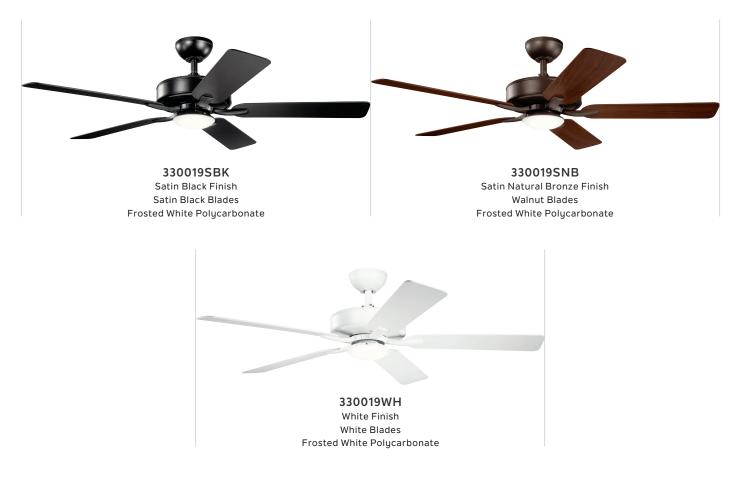

52" Basics Pro Designer



Blades (5) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 90 CRI, 3000K

Downlight Glass Frosted White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included Control 3 Speed Basic Handheld

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Damp Hanging Weight 17.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.43 on High RPM 167 on High Energy Star® No

WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 12.50"	B: 10.50"	C: 11.50"	D: 5.90"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing
(from ceiling)	(from ceiling)	(width)
A: 9.50"	B: 7.50"	C: 11.50"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4367	52	84	



HANGING MEASUREMENTS



D

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High USAGE Watts on High (Excludes Lights) AIRFLOW EFFICIENCY Cubic Ft. Per Minute Lights) Per Watt			
3853	52	74	

Α В

- 3 Forward Speeds

- Lights On/Off with

Full-Range Dimming

& Motor Off


COOLTOUCH[™]

TRANSMITTER -

FULL FUNCTION

370039 (Shown)

- Manual Reverse

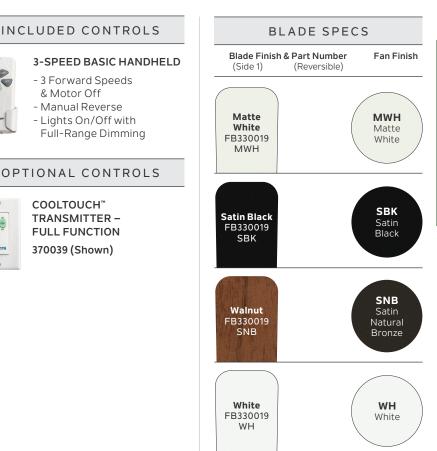


Shown: 330021MWH Matte White Finish with Matte White Blades

52" Basics Pro Legacy Patio




52" Basics Pro Legacy Patio

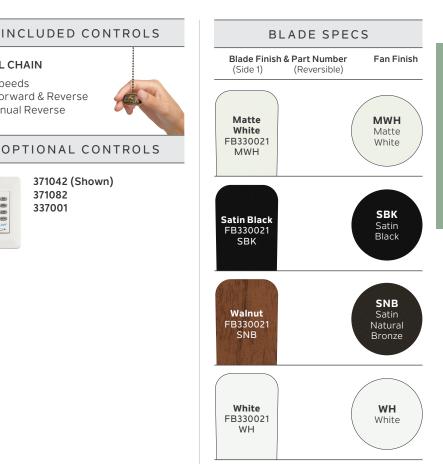

HANGING MEASUREMENTS

FLUSH MOUNT				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 8.00"	B: 6.00"	C: 11.50"	D: 11.50"	



AIR PERFORMANCE				
AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY Per Minute Watts on High Cubic Ft.				
on High	(Excludes Lights)	Per Minute Per Watt		
3676	57	64		

INCLUDED FEATURES

Optional Downlight See pages 266-270

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only

Warranty Visit Kichler.com/Warranty

Motor Size/Type 153mm X 15mm, AC

MOTOR FEATURES

Blades (5) Included

- Non-reversible

- 12° Pitch

- ABS

- 52" Sweep

Downrods N/A

Downlight N/A Downlight Glass N/A

Uplight N/A

Lead Wire 12" cUL Listed Damp Hanging Weight 13.2 lbs. Body Material Steel

Amps 0.57 on High RPM 157 on High Energy Star® No

Uplight Glass N/A

Low Ceiling Adaptable No Control Pull Chain



PULL CHAIN

- 3 Forward & Reverse

371042 (Shown)

371082 337001


- Manual Reverse

- 3 Speeds

-

Shown: 330020SNB Satin Natural Bronze Finish with Walnut Blades

52" Basics Pro Legacy

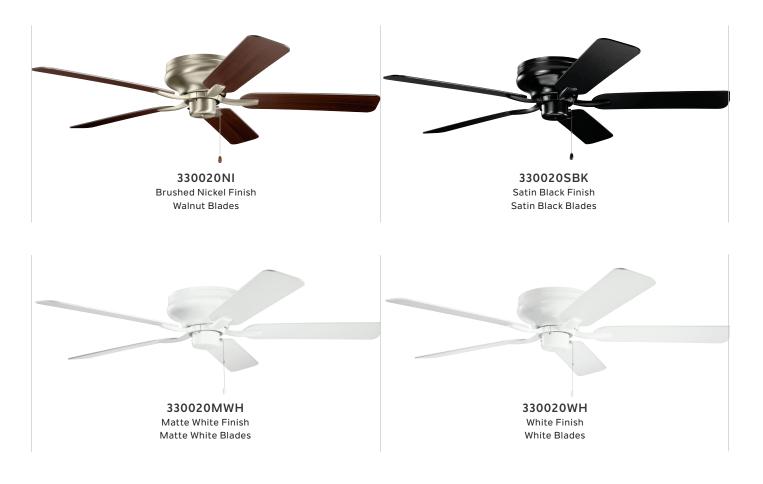

52" Basics Pro Legacy



INCLUDED FEATURES

Blades (5) Included - 12° Pitch - 52" Sweep - Reversible - Wood Downrods N/A Downlight N/A Downlight Glass N/A Optional Downlight See pages 266-270 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable Yes, Low Ceiling Adaptable Control Pull Chain

FAN FEATURES


Mounting Slope – Pitch Flat ceiling only Lead Wire 12" cUL Listed Indoor Hanging Weight 12.8 lbs. Body Material Steel Warranty Visit Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.57 on High RPM 152 on High Energy Star[®] No

FLUSH MOUNT					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 8.00"	B: 6.00"	C: 11.50"	D: 11.50"		

AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
3536	57	62			



INCLUDED CONTROLS

OPTIONAL CONTROLS

371042 (Shown)

371082

337001

PULL CHAIN

- 3 Forward & Reverse

- Manual Reverse

- 3 Speeds

Da









Accessories

Want to enhance your ceiling fan? Simple tweaks can make a big impact. To help, we offer a variety of ceiling fan accessories such as wall and remote controls, light kits, blades, and shades to help change the look of your ceiling fan.







AC Control Systems

Includes transmitter and receiver.



371082 WH (shown) CoolTouch[™] Handheld Control System -Limited Function

- · Designed for AC motor fans
- 65K Čode
- 3 Forward Speeds, Motor Off
- Manual Reverse
- · Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas. Wireless radio frequency operational radius of 30' or less.
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries. Transmitter is Dry-rated for indoor use only. CoolTouch Limited Function also available in Almond (ALM) and Ivory (IV) faceplate colors - 370010.



Available Transmitter 371062 MULTR

65K Wall Transmitter – Limited Function Almond (ALM), Ivory (IV) or White (WH)



371085 ALM, IV, WH (SHOWN) CoolTouch[™] Handheld Control System -**Full Function**

- AC Motor Fans
- 65K Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas. Wireless radio frequency operational radius of 30' or less.
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries. Transmitter is Dry-rated for indoor use only. CoolTouch Limited Function also available in Almond (ALM) and Ivory (IV) faceplate colors - 370010.



Available Transmitter 371065 MULTR 65K Wall Transmitter - Full Function

Almond (ALM), Ivory (IV) or White (WH)






-

371042MUL Wall Control System -

Limited Function







- 3 Forward Speeds, Motor Off
- Manual Reverse
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas
- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware. Hard-wired wall control. Transmitter is Dry-rated for indoor use only.



Available Transmitter 370005 65K CoolTouch™ Transmitter -Limited Function

371045MUL Wall Control System -**Full Function**



- Designed for AC motor fans
- 65K Code
- · 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas
- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code
- settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware. Hard-wired wall control. Transmitter is Dry-rated for indoor use only.



Available Transmitter 370006 65K CoolTouch™ Transmitter -**Full Function**



337001WH Handheld Control System -Basic

- Designed for AC motor fans • 16 Frequency Code
- 3 Forward Speeds, Motor Off
- Manual Reverse
- Lights on/off with full-range dimming. On/off only for fluorescent. Not recommended for LED light kits.
- Transmitter is Dry-rated for indoor use only.
- Includes transmitter and canopy-mounted receiver with 16 possible frequencies. Also includes wall bracket and mounting hardware, plus 9-volt battery.





W

AC Controls - Transmitter only



370038MULTR Wall Transmitter – Full Function

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.



337009WHTR CoolTouch[™] Transmitter – Full Function*

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.





370039MULTR Wall Transmitter – Limited Function

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.



337214TR CoolTouch™ Transmitter – Limited Function*

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket, mounting hardware and White faceplate.

Accessory 370010 ALM 370010 IV (shown)

AC Controls – Conversion Kit



	CoolTouch [™] Reversible Conversion Handheld Control System – Full Function					
Item Number	3R200	3R4	3R400 3W500			
Finishes	BSS, DBK, MWH, NBR, NI, OBB, SNW, TZ, WH	AP, BSS, MWH, NBR, NI, OBB, OZ, SGD, SNW, TZ, WH		SBK, TZP, WCP, WH, WSP		
For use with Fans:	300117 52" Canfield [™] 330247 52" Terra	300107 44" Canfield [™] 339011 52" Sutter Place	339017 42" Stratmoor 339022 52" Stratmoor	310192 52" Canfield [™] Patio W		
Control Function	• 16 Frequency Code • 3 Forward Speeds, Reverse, and Motor Off					
Downlight Control	On/off with full-range dimming and intelligent return for both					
Receiver	Wireless operational radius of 30' or less					
Compatibility	Replaces any single-wall switch or mounts on any flat surface					
Notes	Includes wall bracket and mounting hardware, plus replaceable, long-life lithium batteries. Also includes wall pocket, transmitter, canopy-mounted receiver and reversing wiring harness. Designed exclusively for and intended for use with listed Kichler [®] brand ceiling fans ONLY.					
	370010 ALM	(shown), IV		I, IV, WH (shown)		

Accessories



370010 ALM (shown), IV Single Gang CoolTouch[™] Wallplate works with any AC or DC CoolTouch[™] Control System



370011 ALM, IV, WH (shown) Dual Gang CoolTouch[®] Wallplate works with any AC or DC CoolTouch[®] Control System

AC Fan Hardwire Wall Controls



Dual-Slide Control – Fan/Light 337010 ALM, IV, WH (shown)

- Designed for AC Motor Fans
- Max 1.25 Amp
- Fan speed and light control
- Controls 1 fan and light
- Full-range dimming light control
- Includes faceplate. Requires 3 wire + ground installation. For use with most AC ceiling fans.

4-Speed Slide Control – Fan only 337012 ALM (shown), IV, WH

- Designed for AC Motor Fans
- Max 1.25 Amp
- 4-Speed fan control
- Controls 1 fan
- Includes faceplate. Can be used in dual gang box alongside our Dimmer Slide Control 337011. For use with most AC ceiling fans.

Dimmer Slide Control – Light only 337011 ALM, IV (shown), WH

- Designed for AC Motor Fans
- Max 600W
- Full-range light dimmer
- Controls 1 fan light or light fixture
- Full-range dimming light control
- Includes faceplate. Can be used in dual gang box alongside our 4-Speed Slide Control 337012. For use with most AC ceiling fans.



4-Speed Wall Control – Rotary 370040

- Designed for AC Motor Fans
- Max 10 Amp
- Controls multiple fans on one circuit
- Brushed Aluminum faceplate with black control knob. For use with most AC ceiling fans.



4-Speed Wall Control – Rotary 370032MUL

- Designed for AC Motor Fans
- Max 5 Amp
- Controls 2 or 3 fans (3 max.)
- Includes Almond, Ivory, and White faceplates and control knobs. For use with most AC ceiling fans.

DC Control Systems



6-Speed DC Wall Transmitter – Full Function 370036 ALMTR, IVTR, WHTR (shown)

• DC Motor Fans only

- 6 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Sold separately
- Includes White faceplate and mounting hardware. No more than two fans on one circuit.



6-Speed DC CoolTouch™ Transmitter – Full Function 371075

- DC Motor Fans only
- 6 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Sold separately
- Includes White faceplate and mounting hardware. No more than two fans on one circuit.

Accessories 370010 ALM (shown) 370010 IV



Hanger System Accessories







	60° Slope Adapter	Flush Mount Kits	Downrod Coupler	
ltem Number and Finishes	337005 + Finish code	337008 + Finish code	337007 + Finish code	
Features	 Adapts to sloped or vaulted ceilings from 0° to 60° Accepts our CoolTouch[™] Receiver Unit for remote controlled fans Includes "Stabilized" Mounting System with tension feature Safety features prevent fan from "lifting" off mounting system Heavy-duty design features 2 safety pins and 1 screw set for maximum safety 	 For use with any fan noted as "Low Ceiling Adaptable" Accepts control receiver for remote controlled fans 	Decorative Coupler for 1" (O.D.) extension downrods to achieve desired length	
Dimensions	6.00" Dia. x 4.00" H	6.00" Dia. x 2.75" H	2.00" Dia. x 4.00" H	
Notes	 Designed for indoor or outdoor use. Outdoor finishes are powder coated or painted with a galvanized undercoating Designed for use with 1" O.D. downrods ONLY Available in all Kichler® fan finishes Downrod sold separately U.S. Patent Pending 	 Overall fan height reduced by approximate length of downrod removed For use with: 60" Ashbyrn, 52" Bentzen, 52" Bentzen Select LED, 44" Canfield, 52" Canfield Pro LED, 52" Canfield Pro LED, 52" Canfield Select LED, 60" Canfield XL, 60" Canfield XL Patio, 52" Hendrik, 52" Kittery Point, 52" Monarch II, 52" Monarch II Patio, 52" Monarch II Select, 52" Terra, 52" Terra Select, 52" Tess 	For use with dual-threaded downrods only	

FINISH CODES

ANS	Antique Satin Silver	МСН	Midnight Chrome	SNB	Satin Natural Bronze
AP	Antique Pewter	MDW	Mediterranean Walnut™	SNW	Satin Natural White
AVI	Anvil Iron	MWH	Matte White	ΤZ	Tannery Bronze™
AW	Aged White	NBR	Natural Brass	TZG	Tannery Bronze [™] with Gold
BAB	Burnished Antique Brass	NI	Brushed Nickel	TZP	Tannery Bronze™ Powder Coat
BKZ	Berkshire Bronze™	OBB	Oil Brushed Bronze™	WCP	Weathered Copper
BSS	Brushed Stainless Steel	OLZ	Oiled Bronze	WH	White
СМО	Coffee Mocha	ΟZ	Olde Bronze®	WN	Walnut
CZ	Carre Bronze	PN	Polished Nickel	WSP	Weathered Steel
DBK	Distressed Black	SGD	Sterling Gold	WZC	Weathered Zinc
GST	Galvanized Steel	SBK	Satin Black		

AUB fan finish Includes DBK (Distressed Black) downrod BAP fan finish Includes AP (Antique Pewter) downrod

All Kichler[®] ceiling fans come standard with our universal hanging system. This basic system allows for mounting on ceilings with up to a 30° slope. For ceilings in excess of 30° of slope, please utilize our 60° Slope Adapter (337005).

Recommended for fan stability in high wind applications. (For any slope or flat ceiling)



Outdoor Light Kits

LED Industrial Mesh Light Kit

380952 DBK (shown), MWH, OZ, TZP, WCP, WSP, WZC

Etched Cased

• 17W Dimmable

LED Platform

12.75" Diameter

6.25" Height

Wet

Integrated

• 1,600 lm

• 80 CRI

• 3,000K

Opal

Glass

Downlight

Dimensions

ETL Listed

LED Bluetooth [®] A	Audio Light Kit
------------------------------	-----------------

380950 MWH, NI (shown), SBK, SNB




LED Yorke Ceiling Fan Light Kit

380915 DBK, MWH, SBK (shown), TZP, WCP, WH, WSP

Glass	Clear Seeded	
Downlight	• Includes (1) E26,7W LED, 2,700K	
Dimensions	8.50" Diameter 9.00" Height	
cUL Listed	Wet	


LED Bridge Point Ceiling Fan Light Kit

380945 DBK, OZ (shown), WCP, WSP, WZC

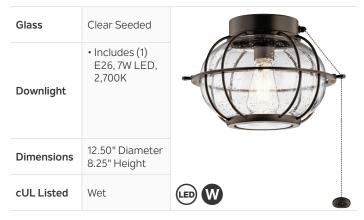

LED Ahrendale[™] Ceiling Fan Light Kit

380949 AUB, AVI (shown), WZC

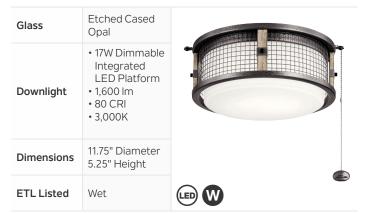

Schoolhouse Light Kit

380903 ANS, CMO, MWH, NI, SBK (shown), SNB, SNW, TZP, WCP, WH, WSP

Glass	Cased Opal	
Downlight	• Includes (1) E26, 13W CFL, 4052	
Dimensions	8.00" Diameter 6.75" Height	
cUL Listed	Wet	W

Outdoor Light Kits

	LED Low-P	rofile Light I	Kit			LED Lo	ow-Pro	ofile Light	Kit
	380930 MU	L (WH show	'n)			380931	MUL	(SNB show	vn)
Glass	Etched Cased Opal				Glass	Umber Etch	ed		
Downlight	 17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 3,000K 		~		Downlight	 17W Dimminute Integrated Platform 1,600 lm 80 CRI 3,000K 			
Dimensions	11.50" Diameter 4.25" Height				Dimensions	11.50" Diame 4.25" Height			***
cUL Listed	Wet		(rod) sur		cUL Listed	Wet			(NOTE)
Notes	Includes MWH, NI and SNB finishes.				Notes	Includes MV NI and SNB finishes.			0
				FINISH	CODES				
ANS	Antique Satin Sil	ver	OBB	Oil Brushed	Bronze™	WH	White		
AP	Antique Pewter		οz	Olde Bronze	9 [®]	WSP	Weath	nered Steel	
AUB	Auburn Stained		SBK	Satin Black		WZC	Weath	nered Zinc	
AVI	Anvil Iron		SGD	Sterling Gold	d				
СМС	D Coffee Mocha		SNB	Satin Natura	al Bronze				
DBK	Distressed Black		SNW	Satin Natura	al White				
MD	Mediterranean V	Valnut	ΤZ	Tannery Bro	onze™				
MW	H Matte White		TZP	Tannery Bro	onze [™] Powder Co	bat			

Weathered Copper

WCP

NI

Brushed Nickel


Outdoor Light Kits

CFL Slim-Profile Light Kit

380911 ANS, CMO, DBK, MWH (shown), SNW, WH

LED Light Kit

338629 MWH, WCP, WSP (shown)

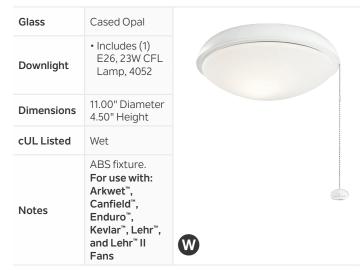

Glass	Etched Cased Opal	
Downlight	17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 3,000K	
Dimensions	7.50" Diameter 3.00" Height	
cUL Listed	Wet	
Notes	ABS fixture. For use with: Arkwet [™] , Canfield [™] , Enduro [™] , Kevlar [™] , Lehr [™] , and Lehr [™] II Fans	

Outdoor CFL Light Kit

380912 ANS, CMO (shown), MWH, SBK, TZP, WCP, WH, WSP

Glass	Cased Opal	
Downlight	• Includes (2) GU24, 13W CFL Lamps, 4043	
Dimensions	11.00" Diameter 4.50" Height	
cUL Listed	Wet	
Notes		\mathbf{W}

Outdoor CFL Light Kit

380010 ANS, CMO, MWH (shown), SBK, TZP, WCP, WH, WSP

Glass	Cased Opal	e
Downlight	• Includes (2) E26, 13W CFL Lamps, 4052	
Dimensions	10.25" Diameter 5.50" Height	
cUL Listed	Wet	(ubitur)
Notes		W

Indoor Light Kits

	LED Low-P	rofile Light	Kit		LED Low-P	
	380030 N	IUL (shown)		380032 N	IUL (shown)
Glass	Etched Cased Opal			Glass	Umber Etched	
Downlight	17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 3,000K			Downlight	 17W Dimmable Integrated LED Platform 1,600 lm 80 CRI 3,000K 	
Dimensions	10.00" Diameter 4.75" Height		**	Dimensions	10.00" Diameter 4.75" Height	
:UL Listed	Indoor		unitue	cUL Listed	Indoor	(chan
Notes	Includes MWH, NI and SNB finishes.	LED		Notes	Includes MWH, NI and SNB finishes.	
	LED Low-P					Profile Light Kit
	380031 MU	rofile Light L (WH show				Profile Light Kit L (SNB shown)
Glass				Glass		-
Glass Downlight	380031 MU Etched Cased			Glass Downlight	380033 MU	-
	380031 MU Etched Cased Opal • 17W Dimmable Integrated LED Platform • 1,600 Im • 80 CRI				380033 MU Umber Etched • 17W Dimmable Integrated LED Platform • 1,600 Im • 80 CRI	L (SNB shown)
Downlight	380031 MU Etched Cased Opal • 17W Dimmable Integrated LED Platform • 1,600 Im • 80 CRI • 3,000K 13.00" Diameter			Downlight	380033 MU Umber Etched • 17W Dimmable Integrated LED Platform • 1,600 Im • 80 CRI • 3,000K 13.00" Diameter	L (SNB shown)

338200 AP (shown), DBK, MWH, NBR, NI, OBB, SGD, SNB, SNW, TZ, WH



Indoor Light Kits









Indoor Light Fitters

Designed to accommodate 2-1/4" fitter glass (sold separately). See the next page for glass options.

		4-Light Medium Base Fitter	4-Light Bent Arm Fitter
Item Number	r	350210 AP, BSS, DBK, MWH, NI, OBB, OZ (SHOWN), SNB, TZ, WH	350015 AP, BSS, DBK, MWH, NI, OBB, OZ, SBK (SHOWN), SNB, TZ, WH
Downlight	• Includes (4) E26, 13W CFL, Non- Dimmable Lamps		
Socket	Threaded Nord Sockets		
cUL Listed	Indoor	* erentuer	
Dimensions		6.75" Width 3.75" Height	12.75" Width 3.50" Height
Notes	Includes retainer	nut tool for easy assembly of glass shades.	

		3-Light Decorative Fitter Light Kit
Item Number		380041 DBK (shown), NI, OBB, SBK, TZ, WH, OZ, MWH
Downlight	Includes (3) B10, 4W LED Lamps, 4053CLR	
Dimensions	10.25" Diameter 6.75" Height	
cUL Listed	Indoor	
Glass	None	

2-1/4" Fitter Glass




			2-1/4" Fitter Glass		
Item Number	340126	340127	340115	340116	340135
Glass	Umber Etched	Satin Etched	Citrine	Etched Seedy	Clear Seeded
Dimensions	5.25" Width 4.75" Height	5.25" Width 4.75" Height	5.50" Width 5.00" Height	5.50" Width 5.00" Height	5.25" Width 4.75" Height



	2-1/4" Fitter Glass					
Item Number	340010	340011	340012	340114	340121	
Glass	Satin Etched Cased Opal	White Vetro Mica	Cased White Water	Frosted Ribbed	White Alabaster	
Dimensions	5.25" Width 5.00" Height	5.25" Width 5.00" Height	5.25" Width 5.00" Height	4.50" Width 5.00" Height	5.00" Width 5.25" Height	



Item Number	340129	340130*	340131	340128	340133	
Glass	Pine Bark	White Linen	Mocha Wisp	White Alabaster	Clear/Etched	
Dimensions	4.25" Width 4.50" Height	4.25" Width 4.50" Height	4.25" Width 4.50" Height	5.25" Width 4.75" Height	4.75" Width 5.25" Height	

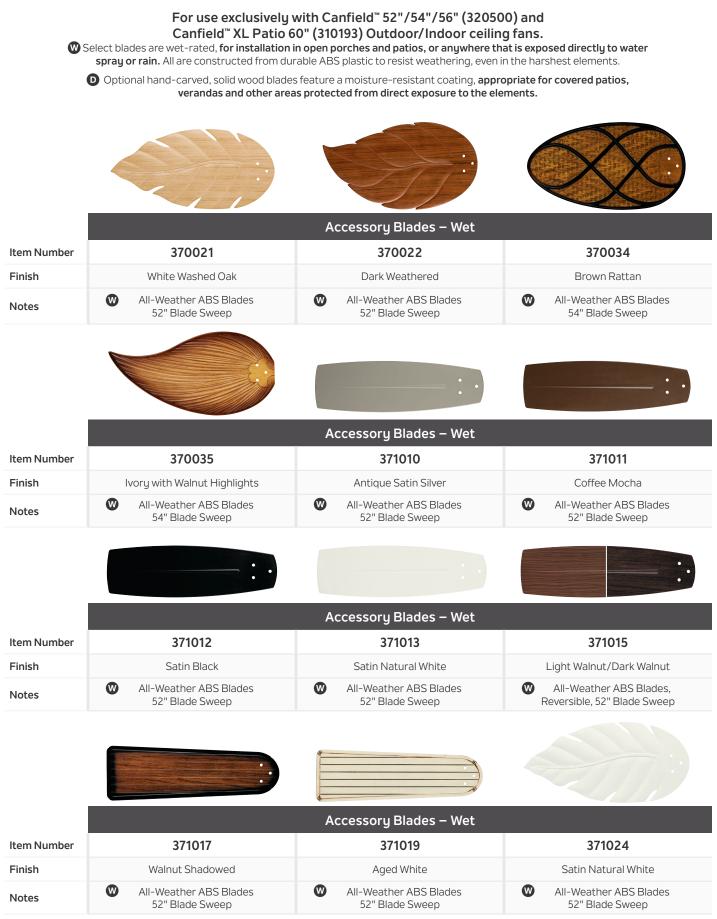

Accessory Blades

	Accessory Bl	ades – Damp
Item Number	371021	371101
Finish	lvory with Walnut Highlights	American Walnut Stain
Notes	 Solid Wood Blades 52" Blade Sweep 	Solid Wood Blades 56" Blade Sweep

For use exclusively with Canfield[™] 52" (300117) and Canfield[™] Pro LED 52" (330013) ceiling fans.



	Indoor 52" Accessory Blades – Solid Wood				
Item Number	371030	371031	371038		
Finish	Weathered White Walnut	Shadowed Walnut	Weathered Dark Walnut		
Notes	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades 52" Blade Sweep		







	Indoor 52" Accessory Blades – Solid Wood					
Item Number	370050	371070	371040			
Finish	Walnut Shadowed	Distressed White	Silver/Black			
Notes	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades, Reversible 52'' Blade Sweep			

For use exclusively with 70" Monarch[™] (300206) and Canfield[™] XL (300188) ceiling fans.

	Indoor 70" Accessory Blades – Solid Wood			
Item Number	371050			
Finish	Weathered White Walnut			
Notes	Solid Wood Blades 70" Blade Sweep			

Dual-Threaded Downrods

Extension downrods 1" (O.D.). Not for use with Kichler[®] Basics fans.


	Ceiling Height	9 ft.	10 ft.	11 ft.	12 ft.	13 ft.	14 ft.	15 ft. +
	Suggested Downrod Length	12"	18"	24"	36"	48"	60"	72"
	FINISHES							
	ANS	360000	360001	360002	360003	360004	360005	360006
	Antique Satin Silver	ANS	ANS	ANS	ANS	ANS	ANS	ANS
	AP	360000	360001	360002	360003	360004	360005	360006
	Antique Pewter	AP 360000	AP 360001	AP 360002	AP 360003	AP 360004	AP 360005	AP 360006
	AVI Anvil Iron	AVI	AVI	AVI	AVI	AVI	AVI	AVI
	AW	360000	360001	360002	360003	360004	360005	360006
	Aged White	AW	AW	AW	AW	AW	AW	AW
	BAB	360000	360001	360002	360003	360004	360005	360006
	Burnished Antique Brass	BAB	BAB	BAB	BAB	BAB	BAB	BAB
	BKZ	360000	360001	360002	360003	360004	360005	360006
	Berkshire Bronze™	BKZ	BKZ	BKZ	BKZ	BKZ	BKZ	BKZ
	BSS	360000	360001	360002	360003	360004	360005	360006
	Brushed Stainless Steel	BSS	BSS	BSS	BSS	BSS	BSS	BSS
	CMO Coffee Mocha	360000 CMO	360001 CMO	360002 CMO	360003 CMO	360004 CMO	360005 CMO	360006 CMO
	CZ	360000	360001	360002	360003	360004	360005	360006
0	Carre Bronze	CZ	CZ	CZ	CZ	CZ	CZ	CZ
	DBK	360000	360001	360002	360003	360004	360005	360006
	Distressed Black	DBK	DBK	DBK	DBK	DBK	DBK	DBK
	GST	360000	360001	360002	360003	360004	360005	36000
	Galvanized Steel	GST	GST	GST	GST	GST	GST	GST
	МСН	360000	360001	360002	360003	360004	360005	36000
	Midnight Chrome	MCH	MCH	MCH	MCH	MCH	MCH	MCH
	MDW	360000	360001	360002	360003	360004	360005	36000
	Mediterranean Walnut™	MDW	MDW	MDW	MDW	MDW	MDW	MDW
0	MWH	360000	360001	360002	360003	360004	360005	36000
	Matte White	MWH 360000	MWH 360001	MWH	MWH	MWH	MWH 360005	MWH
0	NBR Natural Brass	NBR	360001 NBR	360002 NBR	360003 NBR	360004 NBR	NBR	36000 NBR
	NI	360000	360001	360002	360003	360004	360005	36000
0	Brushed Nickel	NI	NI	NI	NI	NI	NI	NI
	OBB	360000	360001	360002	360003	360004	360005	360006
	Oil Brushed Bronze™	OBB	OBB	OBB	OBB	OBB	OBB	OBB
	OLZ	360000	360001	360002	360003	360004	360005	36000
	Oiled Bronze	OLZ	OLZ	OLZ	OLZ	OLZ	OLZ	OLZ
0	oz	360000	360001	360002	360003	360004	360005	36000
	Olde Bronze [®]	OZ	OZ	OZ	OZ	OZ	OZ	OZ
-	PN Deliched Nickel	360000	360001	360002	360003	360004	360005	36000
	Polished Nickel	PN 360000	PN 360001	PN 360002	PN 360003	PN 360004	PN 360005	PN 36000
	SBK Satin Black	SBK	SBK	SBK	SBK	SBK	SBK	SBK
-	SGD	360000	360001	360002	360003	360004	360005	36000
	Sterling Gold	SGD	SGD	SGD	SGD	SGD	SGD	SGD
	SNB	360000	360001	360002	360003	360004	360005	36000
	Satin Natural Bronze	SNB	SNB	SNB	SNB	SNB	SNB	SNB
	SNW	360000	360001	360002	360003	360004	360005	36000
	Satin Natural White	SNW	SNW	SNW	SNW	SNW	SNW	SNW
0	TZ	360000	360001	360002	360003	360004	360005	36000
	Tannery Bronze™	TZ	TZ	TZ	TZ	TZ	TZ	TZ
•	TZG Tannery Bronze [™] with Gold	360000 TZP	360001 TZP	360002 TZP	360003 TZP	360004 TZP	360005 TZP	36000 TZP
		360000	360001	360002	360003	360004	360005	36000
	Tannery Bronze [™] Powder Coat	TZP	TZP	TZP	TZP	TZP	TZP	TZP
•	3	360000	360001	360002	360003	360004	360005	36000
	WCP	WCP	WCP	WCP	WCP	WCP	WCP	WCP
	WCP Weathered Copper			360002	360003	360004	360005	36000
		360000	360001	300002				
	Weathered Copper		360001 WH	WH	WH	WH	WH	WH
	Weathered Copper WH	360000				WH 360004	WH 360005	
	Weathered Copper WH White	360000 WH 360000 WN	WH	WH 360002 WN	WH			
	Weathered Copper WH White WN Walnut WSP	360000 WH 360000 WN 360000	WH 360001 WN 360001	WH 360002 WN 360002	WH 360003 WN 360003	360004 WN 360004	360005 WN 360005	360000 WN 360000
	Weathered Copper WH White WN Walnut	360000 WH 360000 WN	WH 360001 WN	WH 360002 WN	WH 360003 WN	360004 WN	360005 WN	360006

AUB fan finish Includes DBK (Distressed Black) downrod BAP fan finish Includes AP (Antique Pewter) downrod



Light Bulb Reference

Incandescent and Compact Fluorescent Light Bulbs



Product ID	Incandescent Light Bulb Description	
4062CLR	40W E12, B8 Clear Replacement Lamp	
4063CLR 4064CLR	40W E12, B10 Clear Replacement Lamp 60W E12, B10 Clear Replacement Lamp	
4069CLR 4070CLR 4060CLR	15W E12, C7 Clear Replacement Lamp 10W E12, C7 Clear Replacement Lamp 7W E12, C7 Clear Replacement Lamp	
4058CLR	40W E12, Antique Decorative Lamp	

Product ID	Fluorescent Light Bulb Descriptic	n
4055	22W T9 Circline G10q Base Replacement Lamp	
4056	22W G10q Replacement Ballast	sof.
4043	13W GU24 Replacement Ballast	
4051	18W GU24 Squat Replacement Ballast	
4052	13W E26 Replacement Ballast	

Product ID	Halogen Light Bulb Description	
5925CLR	100W J Type Halogen Replacement Lamp	
5920FST 5910CLR 5902CLR 5903CLR	50W E11, Halogen T3 Replacement Lamp 75W E11, Halogen T3 Replacement Lamp 50W GU10, Halogen T3 Replacement Lamp 100W E11, Halogen T3 Replacement Lamp	
5907FST 5919FST 5905FST	40W E12, Krypton T3 Replacement Lamp 50W E12, Krypton T3 Replacement Lamp 60W E12, Krypton T3 Replacement Lamp	

Product ID	LED Light Bulb Description
4061FST	9W E26, LED Replacement Lamp
4053CLR	4W B10, LED Replacement Lamp

Equivalent Light Output

To determine which qualified CFL light bulbs will provide the same amount of light as your current incandescent light bulbs, consult the following chart:

Incandescent Light Bulbs Watts (W)	Incandescent Minimum Light Bulbs Lumens (Im)	Common CFL Light Bulbs Watts (W)
40W	450 lm	9W - 13W
60W	800 lm	13W - 15W
75W	1,100 lm	18W - 25W
100W	1,600 lm	23W - 30W
150W	2,600 lm	30W - 52W

• Lamps are included with all light kits.

- Wattages stated are the maximum recommended; however, you may use lower wattage lamps to suit your lighting needs.
- All electrical products are certified and listed to UL/CSA/ETL Standards for use in U.S. and Canada.

Inspirational. Helpful. Mindful.

Kichler.com

KICHLER Products Lighting Ideas Tips & Guides For Professionals Why Krahe

A Mood for


Every Room

EXPLORE EFFECT IDEAS

AD

An extension of the Resource Guide, Kichler.com helps you dive deeper into the details of each fixture while helping you envision it in a room or with a coordinating style. Kichler.com is just one more way to help you plan and bring your project to life.

Fan Finishes Swatch Guide

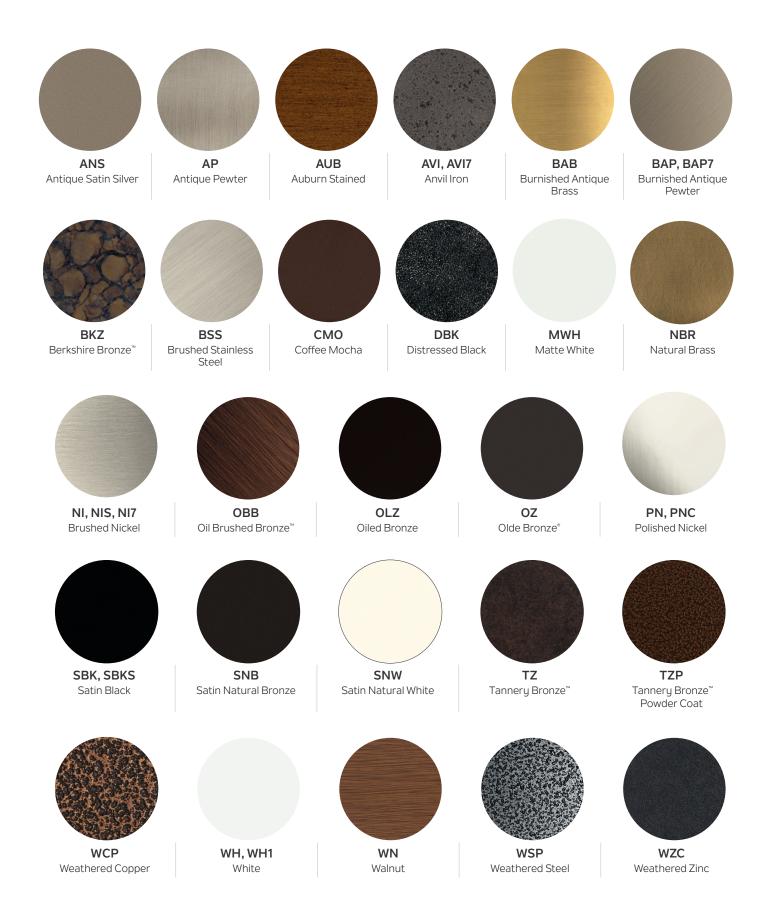

Symbol Guide & Notes

SYMBOL GUIDE



DC MOTOR

CEILING FANS The ultimate in energyefficient operation



ENERGY STAR® CEILING FANS

The trusted, governmentbacked symbol for energyefficient products



LED LIGHT KIT

CEILING FANS Feature a long life, light source that is extremely energy efficient



DAMP-RATED

CEILING FANS Engineered for high-humidity areas



WET-RATED CEILING FANS

For open or direct exposure to sun, rain or water spray



DRY-RATED CEILING FANS

Rated for indoor use only and are <u>NOT</u> intended for damp or wet locations



Federal Communications Commission devices designated with this logo comply with part 15 of the FCC Rules

NOTES

- Bulbs not included unless otherwise noted.
- Wattages stated are the maximum recommended; however, you may use lower wattage lamps to suit your lighting needs. Some recommended lamps are not available in the maximum allowable wattage.
- All electrical products are rated as 120volt, AC unless otherwise noted.
- All electrical products are certified and listed to UL/CSA/ETL Standards for use in U.S. and Canada except where noted.
- All products featured in the outdoor section are certified and listed to UL/ CSA/ETL standards for wet location except where noted.
- Many long-life tungsten halogen capsule lamps are now available as alternates to conventional incandescent light bulbs. The halogen capsule lamps may be used to replace any lamp of a higher wattage, but not to exceed the existing specified maximum wattage, i.e., 72W may replace a 75W.
- Finishes for fixtures installed outdoors are subject to change due to prolonged exposure to sunlight, airborne pollutants and other forms of weathering.
- To serve you better, Kichler reserves the right to make improvements to the products in this catalog. Therefore, some products may change during the life of the catalog and the product information contained in this catalog may also have changed.
- Kichler[®] lighting products are not produced or associated with any Native American Indians, nor are they a Native American product or the product of a particular Indian, Indian tribe or Indian arts and crafts organization as defined by 25 U.S.C. §305 et. seq.

CONSUMER NOTICE

Federal Legislation to phase out 100W incandescent bulbs started January 2012.

The federal government enacted the Energy Independence and Security Act of 2007 in December 2007, requiring all general-purpose light bulbs that produce 310–2600 lumens of light be 30% more energy efficient (similar to current halogen lamps) than current incandescent bulbs by 2014. The efficiency standards started with 100W bulbs in January 2012 and will end with 40W bulbs in January 2014.

Light bulbs outside of this range are exempt from the restrictions (historically, less than 40W or more than 150W). Also exempt are several classes of specialty lights, including appliance lamps, rough service bulbs, 3-way, colored lamps, and plant lights.

By 2020, a second tier of restrictions will become effective; which requires all general-purpose bulbs to produce at least 45 lumens per watt (similar to current CFLs). Exempt from the Act are reflector flood, 3-way, candelabra, colored and other specialty bulbs.

Many governments worldwide have passed measures to prohibit the sale of incandescent light bulbs for general lighting. The aim is to encourage use of more energy-efficient lighting alternatives, such as compact fluorescent lamps (CFLs) and LED lamps.

References: www.energy.senate.gov

We go to great lengths to assure the metal, glass finishes and blades shown in the catalog match the actual products, but printing variations and variations in chemical finishes and the nature of handapplied finishing will cause some differences between the printed images and actual product, and from one product to another.

We use only non-ferrous materials on the exterior parts of our outdoor products, and use the best available weather-resistant finishes. However, due to some extreme environmental conditions such as acid rain, salt air and ultraviolet exposure, we cannot guarantee our exterior finishes, with the exception of our LifeBrite® lanterns.

Due to environmental conditions such as soil acidity, concrete alkalinity and other corrosive soil and air conditions, we cannot guarantee our direct burial posts.



CONNECT WITH US


Like us: Facebook.com/Kichler.Lighting Follow us: Twitter.com/KichlerLight Watch us: YouTube.com/KichlerLighting Join us: Houzz.com/pro/KichlerLighting/Kichler Find us: Pinterest.com/KichlerStyle Follow us: Instagram.com/KichlerLighting

To find an Authorized Dealer, visit Kichler.com.

KICHLER

7711 E. Pleasant Valley Rd. PO Box 318010 Cleveland, Ohio 44131-8010





ABBREVIATION KEY

AC	Alternating Current
ADA	Americans with Disabilities Act
ALM	Almond
Amp	Amperage
сст	Color Temperature
CFL	Compact Fluorescent Lamps
CFM	Cubic Feet Per Minute
CLR	Clear
CRI	Color Rendering Index
D	Depth
dB	Decibel
DC	Direct Current
Dia.	Diameter
Ft	Feet
GA	Gauge
Н	Height
hrs.	Hours
I.D.	Inside Diameter
IV	Ivory
К	Kelvin temperature
L	Length
LED	Light Emitting Diode
lm	Lumens
lm/W	Lumens per Watt
Max.	Maximum
mm	Millimeter
MUL	Multiple Finishes
N/A	Not Applicable
NPSM	National Pipe & Thread - Straight, Male
0.D.	Outside Diameter
RPM	Revolutions Per Minute
Sq. Ft.	Square Feet
V	Volt
VA	Volt-Amp
W	Watt, when directly next to a number
W	Width, when paired with L and/or H
Thd.	Thread

INDEX

3R200	263	300302	86	330243	200	370039	263
3R400	263	300352	138	330247	196	370040	264
3W500	263	300356	42	330347	198	370050	275
4043	278	300365	50	337001	262	371010	274
4051	278	300457	160	337005	265	371011	274
4052	278	300700	70	337007	265	371012	274
4055	278	300702	74	337008	265	371013	274
4056	278	300710	94	337009	263	371015	274
4058	278	310017	184	337010	264	371017	274
4060	278	310018	186	337011	264	371019	274
4062	278	310103	174	337012	264	371021	275
4063	278	310112	126	337033	235, 237, 239	371024	274
4064	278	310115	128	337214	263	371030	275
4069	278	310136	158	338200	269	371031	275
4070	278	310139	150	338629	268	371038	275
5902	278	310140	148	339013	172	371040	275
5903	278	310144	192	339218	232	371040	262
5905	278	310150	192	339224	230	371042	262
5907	278	310152	156	339413	170	371045	275
5910	278		130	339501	224	371050	262
		310155 310160					
5919	278		62	339629	124	371065	262
5920	278	310165	154	340010	273	371070	275
5925	278	310170	152	340011	273	371075	264
300024	144	310175	66	340012	273	371082	262
300026	212	310181	164	340114	273	371085	262
300027	146	310192	218	340115	273	371101	275
300030	78	310193	208	340116	273	380010	268
300031	112	310204	130	340121	273	380011	270
300032	114	310206	166	340126	273	380012	270
300052	38	310239	150	340127	273	380013	270
300060	58	310240	148	340128	273	380014	270
300103	222	310360	180	340129	273	380015	270
300107	220	310700	82	340130	273	380016	270
300117	214	320500	216	340131	273	380017	270
300146	120	330000	188	340133	273	380018	270
300160	98	330001	182	340135	273	380030	269
300168	106	330002	178	350015	272	380031	269
300188	206	330010	226	350210	272	380032	269
300200	54	330013	210	360000	276	380033	269
300206	168	330015	246	360001	276	380041	272
300208	194	330016	248	360002	276	380903	266
300230	102	330017	250	360003	276	380911	268
300238	162	330018	252	360004	276	380912	268
300239	132	330019	254	360005	276	380915	266
300250	176	330020	258	360006	276	380930	267
300251	136	330021	256	370005	262	380931	267
300253	28	330025	228	370006	262	380945	266
300254	46	330090	134	370010	263	380949	266
300256	140	330150	238	370011	263	380950	266
300265	34	330151	236	370021	274	380952	266
300269	142	330152	234	370022	274		
300270	110	330171	244	370032	264		
300275	116	330174	242	370034	274		
300285	32	330180	240	370035	274		
300300	90	330241	204	370036	264		
300301	88	330242	202	370038	263		
500501	00	JJUL7L	202	5,0000	203		

Our Vision

At Kichler Lighting, everything we do, every single day, is with the intention of creating and delivering products that allow people to see what matters most to them. We will do that by relentlessly pursuing quality, ensuring continued innovation, always going one step further in our commitment to exceptional customer service and education, as well as creating on-trend designs that are both stylish and "life-stylish," promising to deliver project success for you.

Get inspired at Kichler.com

KICHLER.

Featured on Front Cover: Seaside" LED Ceiling Fan 310181SBK | Page 164

Catalog No. K420 | Printed in U.S.A., CF19014-60M | For more information call: 866-558-5706 © 2020 Kichler Lighting LLC. All Rights Reserved. The majority of newer Kichler fixtures are U.S. Patent Pending.