

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 56" Sweep
- Reversible
- Wood

Downrods 12" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (4) E12, 40W Krypton/T3 Lamps, 5907FST

Downlight Glass Fresnel Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Flush Mount Canopy included. *Note: Décor trim must be removed for Flush Mount.*

Control CoolTouch™ Control System - Full Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 33 lbs.

Body Material Steel

Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC

Amps 0.69 on High

RPM 146 on High

Energy Star® No

INCLUDED CONTROLS

**COOLTOUCH™ CONTROL SYSTEM - FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS

**WALL TRANSMITTER - FULL FUNCTION**
370038 (Shown)


COORDINATING LIGHTING

To see the complete Hatteras Bay™ Collection visit Kichler.com.



BLADE SPECS


Blade Finish & Part Number (Side 1) Fan Finish (Reversible)

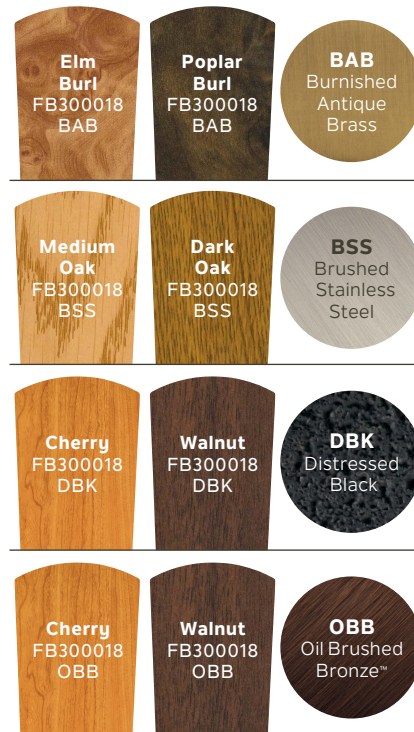

HANGING MEASUREMENTS

WITH 12" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 22.50"	B: 18.50"	C: 15.25"	D: 6.75"



FLUSH MOUNT

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 11.25"	B: 7.25"	C: 15.25"	D: 6.75"

AIR PERFORMANCE

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
6124	82	75

AIR PERFORMANCE (FLUSH)

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
5470	82	67